



EOG Resources, Inc.
600 Seventeenth Street
Suite 1100N
Denver, CO 80202
(303) 572-9000
Fax: (303) 824-5400

September 19, 2000
VIA FAX #801-359-3940 and U.S. Mail

Ms. Lisha Cordova
State of Utah
Division of Oil, Gas and Mining
1594 West North Temple, Suite 1210
P.O. Box 145801
Salt Lake City, Utah 84114-5801

RE: Compliance with Board Order
in Cause No. 173-14
Natural Buttes Unit Area
1540-G06, 1540-AA29

Dear Lisha:

As we discussed during our telephone conversation yesterday afternoon, EOG Resources, Inc. has submitted or will be submitting Applications for Permit to Drill the following described Wasatch formation wells within the Natural Buttes Unit Area pursuant to BLM-approved Designations of Agent from the Unit Operator, Coastal Oil & Gas Corporation:

1. NBU 326-4E
1906' FNL, 695' FWL (SW/4NW/4)
Sec. 4-10S-21E, SLM
Uintah County, Utah
2. NBU 379-2E
1967' FSL, 898' FWL (NW/4SW/4)
Sec. 2-9S-21E, SLM
Uintah County, Utah
3. NBU 392-6E
1926' FSL, 611' FEL (NE/4SE/4)
Sec. 6-10S-21E, SLM
Uintah County, Utah
4. NBU 422-29E
1980' FNL, 785' FWL (SW/4NW/4)
Sec. 29-9S-21E, SLM
Uintah County, Utah

RECEIVED

SEP 21 2000

DIVISION OF
OIL, GAS AND MINING

5. NBU 424-32E
744' FNL, 773' FEL (NE/4NE/4)
Sec. 32-9S-21E, SLM
Uintah County, Utah
6. NBU 484-20E
350' FNL, 823' FWL (NW/4NW/4)
Sec. 20-9S-21E, SLM
Uintah County, Utah
7. NBU 516-12E
1950' FSL, 1786' FEL (NW/4SE/4)
Sec. 12-10S-20E, SLM
Uintah County, Utah
8. NBU 519-3E
1749' FSL, 798' FWL (NW/4SW/4)
Sec. 3-9S-21E, SLM
Uintah County, Utah
9. NBU 521-8E
2250' FSL, 900' FWL (NW/4SW/4)
Sec. 8-9S-21E, SLM
Uintah County, Utah
10. NBU 522-10E
732' FSL, 841' FEL (SE/4SE/4)
Sec. 10-9S-21E, SLM
Uintah County, Utah
11. NBU 523-12E
660' FSL, 660' FEL (SE/4SE/4)
Sec. 12-10S-20E, SLM
Uintah County, Utah
12. NBU 524-12E
841' FSL, 1795' FEL (SW/4SE/4)
Sec. 12-10S-20E, SLM
Uintah County, Utah

RECEIVED

SEP 21 2000

DIVISION OF
OIL, GAS AND MINING

State of Utah
September 19, 2000
Page 3

Each one of these proposed twelve (12) wells has been staked and will be drilled to the Unitized Interval at a location in the Natural Buttes Unit Area which is not closer than 460 feet from the Unit boundary and not closer than 460 feet from any uncommitted tracts of lands therein in full compliance with the Utah Board of Oil, Gas and Mining's Consolidated Order in Cause Nos. 173-14 and 173-15.

If you have any questions or need anything further, please do not hesitate to contact the undersigned.

Yours very truly,

EOG RESOURCES, INC.



Toni Lei Miller
Project Landman

TLM/kse
(m:\t\m\sept\Utahltr.doc)

cc: Ed Trotter
Jim R. Schaefer

RECEIVED

SEP 21 2000

DIVISION OF
OIL, GAS AND MINING

EOG Resources, Inc.
P.O. Box 250
Big Piney, WY 83113

November 22, 2000

Utah Division of Oil, Gas, & Mining
1594 West North Temple
Box 145801
Salt Lake City, UT 84114-5801

**RE: APPLICATION FOR PERMIT TO DRILL
NATURAL BUTTES UNIT #392-1E
NE/SE, SEC. 6, T10S, R21E
UINTAH COUNTY, UTAH
LEASE NO.: U-01791
FEDERAL LANDS**

Enclosed please find a copy of the Application for Permit to Drill and associated attachments for the referenced well.

Please address further communication regarding this matter (including approval) to:

Ed Trotter
P.O. Box 1910
Vernal, UT 84078
Phone: (435)789-4120
Fax: (435)789-1420

Sincerely,

Ed Trotter
Agent
EOG Resources, Inc.

Attachments

RECEIVED

DEC 04 2000

DIVISION OF
OIL, GAS AND MINING

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB NO. 1004-0136

APPLICATION FOR PERMIT TO DRILL OR DEEPEN

1a. TYPE OF WORK
DRILL ☒ **DEEPEN** ☐

b. TYPE OF WELL
Oil ☐ Gas ☒ Well ☐ Well ☒ Other ☐ Single Zone ☐ Multiple Zone ☐

2. Name of Operator
EOG RESOURCES, INC.

3. Address and Telephone Number
P.O. BOX 1815, VERNAL, UT 84078 (435)789-0790

4. Location of Well (Report location clearly and in accordance with any State requirements.)
At surface **1926' FSL & 611' FEL NE/SE**
At proposed prod. Zone **4425719N 620634E**

5. Lease designation and serial number
U-01791

6. If Indian, Allottee or Tribe name
N/A

7. Unit Agreement Name
NATURAL BUTTES UNIT

8. Farm or lease name, well no.
NATURAL BUTTES UNIT

9. API Well No.
NBU 392-6E

10. Field and pool, or wildcat
WASATCH

11. Sec., T., R., M., or BLK. and survey or area
SEC. 6, T10S, R21E

12. County or parish
UINTAH

13. State
UTAH

14. Distance in miles and direction from nearest town or post office
12.2 MILES SOUTHEAST OF OURAY, UTAH

15. Distance from proposed location to nearest property or lease line, ft.
611'
(Also to nearest drig. Unit line, if any)

16. No. of acres in lease
2163.60

17. No. of acres assigned to this well
80

18. Distance from proposed location to nearest well, drilling, completed, or applied for, on this lease, ft.

19. Proposed depth
6510'

20. Rotary or cable tools
ROTARY

21. Elevations (show whether DF, RT, GR, etc.)
5015 FEET GRADED GROUND

22. Approx. date work will start
DECEMBER 2000

PROPOSED CASING AND CEMENTING PROGRAM				
SIZE OF HOLE	GRADE, SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	QUANTITY OF CEMENT
11"	8 5/8"	24#	200' - 220'	100-150 SX CLASS "G" + 2%
or 12 1/4"	9 5/8"	32.30#	200 - 220'	CaCl2 + 1/4 #/SX CELLOFLAKE.
7 7/8"	4 1/2"	10.50#	6510'	50/50 POXMIX + 2% GEL + 10% SALT TO 400' ABOVE ALL ZONES OF INTEREST (+10% EXCESS). LIGHT CEMENT (11PPG+) + LCM TO 200' ABOVE OIL SHALE OR FRESH WATER INTERVALS (+ 5% EXCESS).

SEE ATTACHMENTS FOR:

8 POINT PLAN
BOP SCHEMATIC
SURFACE USE AND OPERATING PLAN
LOCATION PLAT
LOCATION LAYOUT
TOPOGRAPHIC MAPS "A", "B", AND "C"
GAS SALES PIPELINE—MAP "D"
FACILITY DIAGRAM

EOG RESOURCES, INC. WILL BE THE DESIGNATED OPERATOR OF THE SUBJECT WELL UNDER NATION WIDE BOND #NM 2308

Pc: UTAH DIVISION OF OIL, GAS, AND MINING

IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: If proposal is to deepen, give data on present productive zone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout preventer program, if any.

SIGNED [Signature] Federal Approval of this Action is Necessary DATE 11-22-2000

(This space for Federal or State office use)
PERMIT NO. 43-04733783 APPROVAL DATE DEC 04 2000
Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.


CONDITIONS OF APPROVAL, IF ANY:
APPROVED BY [Signature] TITLE BRADLEY G. HILL RECLAMATION SPECIALIST III DATE 12/12/00
DIVISION OF OIL, GAS AND MINING

ENRON OIL & GAS CO.

Well location, NBU #392-6E, located as shown in the NE 1/4 SE 1/4 of Section 6, T10S, R21E, S.L.B.&M. Uintah County, Utah.

Basis of Elevation

TWO WATER TRIANGULATION STATION IN THE NW 1/4 OF SECTION 1, T10S, R21E, S.L.B.&M. TAKEN FROM THE BIG PACK MTN. NE QUADRANGLE, UTAH, UINTAH COUNTY, 7.5 MINUTE QUAD. (TOPOGRAPHIC MAP) PUBLISHED BY THE UNITED STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY. SAID ELEVATION IS MARKED AS BEING 5238 FEET.

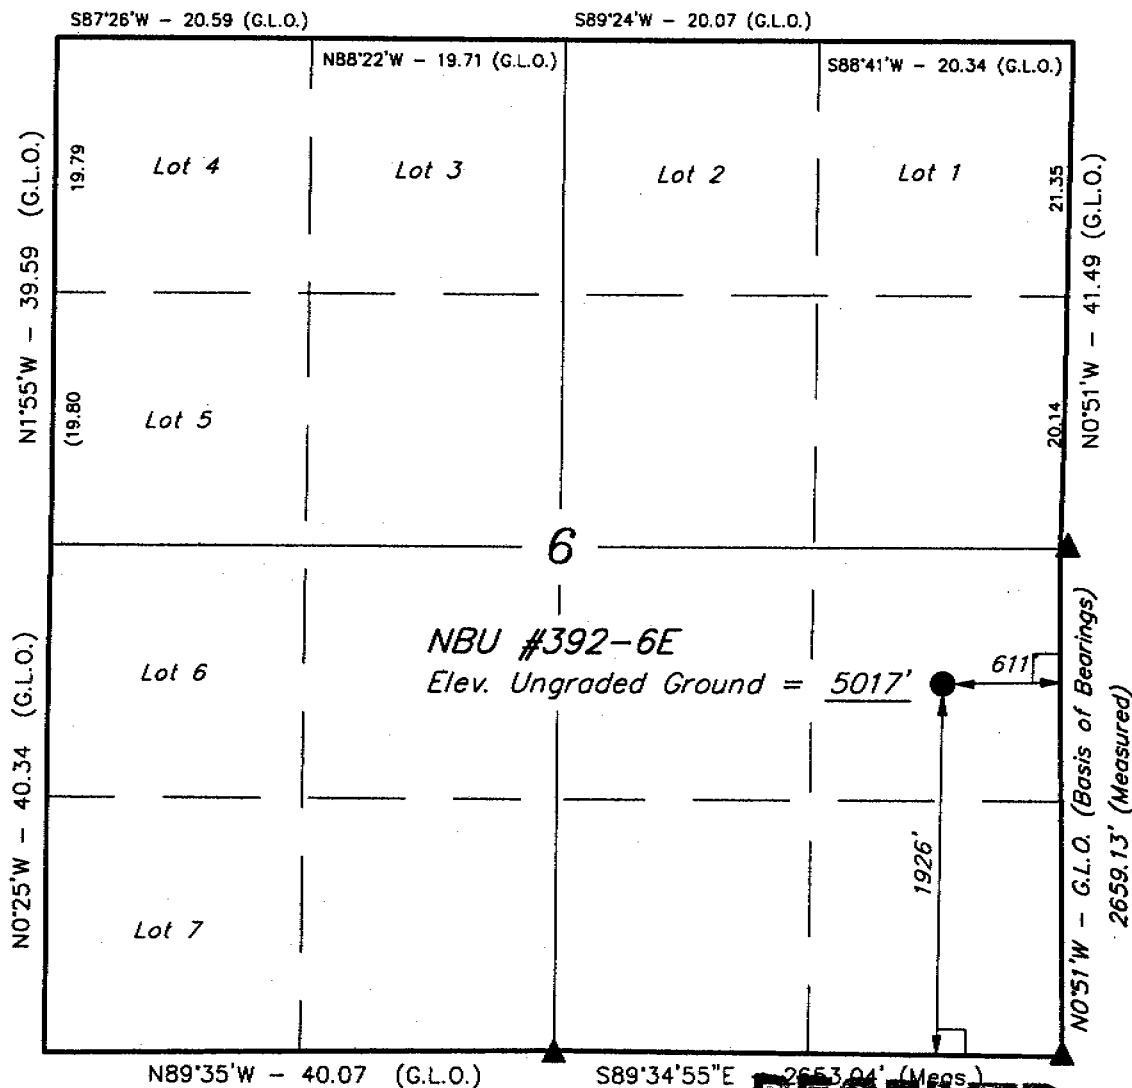

LEGEND:

L = 90° SYMBOL


● = PROPOSED WELL HEAD.

▲ = SECTION CORNERS LOCATED.

2653 04 (Moss)
RECEIVED

DEC 04 2000

DIVISION OF OIL, GAS AND MINING



CERTIFICATE

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM
FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY
SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE
BEST OF MY KNOWLEDGE AND BELIEF.

REGISTERED LAND SURVEYOR
REGISTRATION NO. 16319
STATE OF UTAH
KAY

UTAH ENGINEERING & SURVEYING
 85 SOUTH 200 EAST - VERNAL, UTAH 84078
 (801) 789-1017

SCALE 1" = 1000'	DATE SURVEYED: 10-23-97	DATE DRAWN: 10-28-97
PARTY D.A. K.H. D.COX	REFERENCES G.L.O. PLAT	
WEATHER WARM	FILE ENRON OIL & GAS CO.	

EIGHT POINT PLAN

NATURAL BUTTES UNIT #392-6E

NE/SE, SEC. 6, T10S, R21E

UINTAH COUNTY, UTAH

1. & 2. ESTIMATED TOPS & ANTICIPATED OIL, GAS, & WATER ZONES:

FORMATION	DEPTH	TYPE ZONES	MAXIMUM PRESSURE
Green River	1452		
Oil Shale	1452		
"H" Marker	3072		
"J" Marker	3432		
Base "M" Marker	4362		
Wasatch	4752		
Peters Point	4752	GAS	
Chapita Wells	5462	GAS	
Buck Canyon	6197	GAS	

EST. TD 6510

Anticipated BHP 2800 PSI

3. PRESSURE CONTROL EQUIPMENT: BOP Schematic Diagram attached.

4. CASING PROGRAM:

HOLE SIZE	INTERVAL	LENGTH	SIZE	WEIGHT	GRADE	THREAD	MINIMUM SAFETY FACTOR		
							COLLAPSE	BURST	TENSILE
11	0' - 220'	200' - 220'	8 5/8	24.0 #	J-55	ST&C	1370 PSI	2950 PSI	263,000#
or									
12 1/4	0' - 220'	200' - 220'	9 5/8	32.3 #	H-40	ST&C	1370 PSI	2270 PSI	254,000#
7 7/8	0' - 6510'	6510'	4 1/2	10.5 #	J-55	ST&C	4010 PSI	4790 PSI	146,000#

If conductor drive pipe is used, it will be left in place if its total length is less than 20 feet below the surface. If the total length of the drive pipe is equal to or greater than 20 feet, it will be pulled prior to cementing surface casing, or it will be cemented in place. The minimum diameter of the conductor drive pipe will be 13 3/8".

All casing will be new or inspected.

RECEIVED

DEC 04 2000

DIVISION OF
OIL, GAS AND MINING

EIGHT POINT PLAN

NATURAL BUTTES UNIT #392-6E

NE/SE, SEC. 6, T10S, R21E

UINTAH COUNTY, UTAH

5. MUD PROGRAM

INTERVAL

0' - 220'

240' - 4000'

4000' - TD

MUD TYPE

Air

Air/Mist & Aerated Water

Air/3% KCL water or KCL substitute

Lost circulation probable from 1500' to 3000'+/-.

Sufficient mud inventory will be maintained on location during drilling to handle any adverse conditions that may arise.

6. VARIANCE REQUESTS:

- A. EOG Resources, Inc. requests a variance to regulations requiring a straight run blooie line (Where possible, a straight run blooie line will be used).
- B. EOG Resources, Inc. requests a variance to regulations requiring an automatic ignitor or continuous pilot light on the blooie line. (Not required on aerated water system).
- B. EOG Resources, Inc. requests a variance to regulations requiring the blooie line to be 100' in length. To reduce location excavation, the blooie line will be 75' in length.

7. EVALUATION PROGRAM:

Logs: Schlumberger Platform Express

AIT-GR-SP-CAL

FDC-CNL-GR-Cal-PE

T.D. to base of surface casing

T.D. to 4200'

Cores: None Programmed

DST: None Programmed

Completion: To be submitted at a later date.

Note: If hole conditions prevent the running of open hole logs, a cased hole Dipole Sonic/Neutron/Gr will be run in lieu of open hole logs.

RECEIVED

DEC 04 2000

DIVISION OF
OIL, GAS AND MINING

EIGHT POINT PLAN

NATURAL BUTTES UNIT #392-6E
NE/SE, SEC. 6, T10S, R21E
UINTAH COUNTY, UTAH

8. ABNORMAL CONDITIONS:

None anticipated.

9. STANDARD REQUIRED EQUIPMENT:

- A. Choke Manifold
- B. Kelly Clock
- C. Stabbing Valve
- D. Visual Mud Monitoring

10. HAZARDOUS CHEMICALS:

No chemicals subject to reporting under SARA title III in an amount equal to or greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling of this well.

(Attachment: BOP Schematic Diagram)


RECEIVED
DEC 04 2000
DIVISION OF
OIL, GAS AND MINING

3000 PSIG DIAGRAM

ANNULAR PREVENTOR AND BOTH RAMS ARE 3000 RATED.
CASING FLANGE IS 11" 3000 PSIG RATED.
BOPE 11" 3000 PSIG

TESTING PROCEDURE:

1. BOPE 's will be tested with a professional tester to conform to Onshore Order #2 with retest every 14 days.
2. Blind & Pipe rams will be tested to rated working pressure, 3000 psig
3. Annular preventor will be tested to 50% of working pressure, 1500 psig
4. Casing will be tested to 0.22 psi/ft. or 1500 psig. Not to exceed 70% of burst strength, whichever is greater.
5. All lines subject to well pressure will be pressure tested to the same pressure as blind & pipe rams.
6. All BOPE specifications and configurations will meet Onshore Order #2 requirements for 3000 psig BOPE specifications.

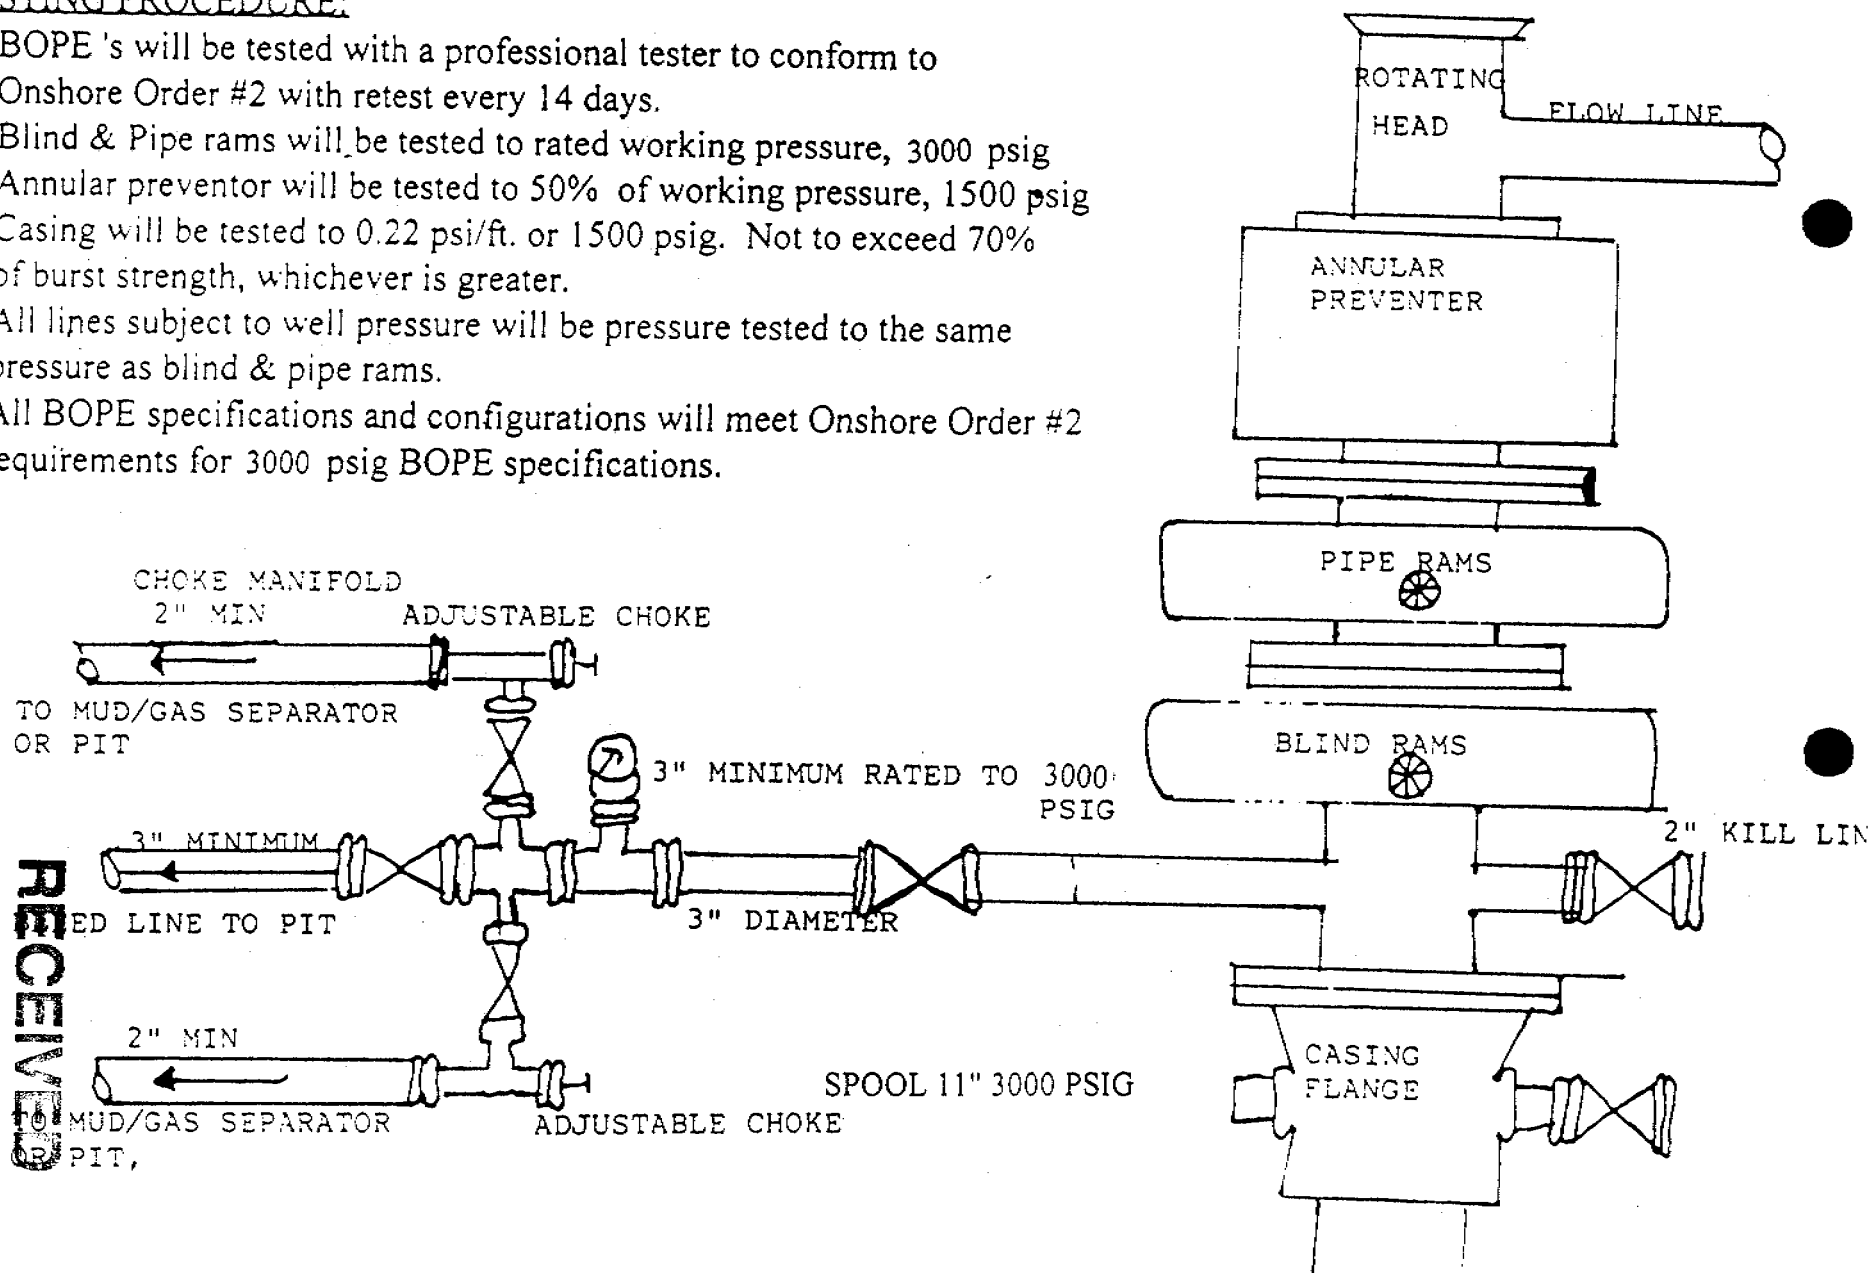

DIVISION OF
OIL, GAS AND MINING

DEC 04 2000

RECEIVED

**CONDITIONS OF APPROVAL
FOR THE SURFACE USE PROGRAM OF THE
APPLICATION FOR PERMIT TO DRILL**

Company/Operator: EOG Resources, Inc.
Well Name & Number: Natural Buttes Unit #392-6E
Lease Number: U-01791
Location: 1926' FSL & 611' FEL, NE/SE, Sec. 6, T10S, R21E, S.L.B.&M.,
Uintah County, Utah
Surface Ownership: Federal

NOTIFICATION REQUIREMENTS

Location Construction - forty-eight (48) hours prior to construction
of location and access roads.

Location Completion - prior to moving on the drilling rig.

Spud Notice: - at least twenty-four (24) hours prior to
spudding the well.

Casing String and
Cementing - twenty-four (24) hours prior to running
casing and cementing all casing strings.

BOP and related
Equipment Tests - twenty-four (24) hours prior to running
casing and tests.

First Production
Notice - within five (5) business days after new
well
begins or production resumes after well
has been off production for more than
ninety (90) days.

For more specific details on notification requirements, please check the Conditions of
Approval for Notice to Drill and Surface Use Program.

RECEIVED

DEC 04 2000

DIVISION OF
OIL, GAS AND MINING

THIRTEEN POINT SURFACE USE PROGRAM

1. EXISTING ROADS

- A. See attached Wellsite Plats showing directional reference stakes on location, and attached TOPO Map "B" showing access to location from existing roads.
- B. The proposed well site is located approximately 12.2 miles southeast of Ouray, Utah - See attached TOPO Map "A".
- C. Refer to attached Topographic Map "A" showing labeled access route to location.
- D. Existing roads will be maintained and repaired as necessary. No off lease Right-of-Way will be required.

2. PLANNED ACCESS ROAD

- A. The access road will be approximately 0.1 miles in length. See attached TOPO Map "B".
- B. The access road has a 30 foot ROW w/ 18 foot running surface.
- C. Maximum grade on access road will be 8%.
- D. No turnouts will be required.
- E. Road drainage crossings shall be of the typical dry creek drainage crossing type.
- F. No culverts, bridges, or major cuts and fills will be required.
- G. The access road will be dirt surface.
- H. No gates, cattleguards, or fences will be required or encountered.

New or reconstructed roads will be centerlined - flagged at time of location staking.

The road shall be upgraded to meet the standards of the anticipated traffic flow and all-weather road requirements. Upgrading shall include ditching, drainage, graveling, crowning, and capping the roadbed as necessary to provide a well-constructed safe road. Prior to upgrading, the road shall be cleared of any snow cover and allowed to dry completely. Traveling off the 30 foot Right-of-Way will not be allowed.

Road drainage crossings shall be of the typical dry creek drainage crossing type. Crossings shall be designed so they will not cause siltation or accumulation of debris in the drainage crossings nor shall the drainages be blocked by the roadbed. Erosion of drainage ditches by run off water shall be prevented by diverting water off at frequent intervals by means of cutouts. Upgrading shall not be allowed during muddy conditions. Should mud holes develop, they shall be filled in and detours around them avoided.

As operator, EOG Resources, Inc. shall be responsible for all maintenance on cattleguards, or gates associated with this oil and/or gas operation.

RECEIVED

DEC 04 2000

DIVISION OF
OIL, GAS AND MINING

3. LOCATION OF EXISTING WELLS WITHIN A ONE MILE RADIUS OF PROPOSED WELL LOCATION

- A. Water wells - None
 - B. Abandoned wells - 1*
 - C. Temporarily abandoned wells - 1*
 - D. Disposal wells - None
 - E. Drilling wells - None
 - F. Producing wells - 15*
 - G. Shut in wells - None
 - H. Injection wells - None
- (*See attached TOPO map "C" for location)

4. LOCATION OF EXISTING AND/OR PROPOSED FACILITIES

A. ON WELL PAD

- 1. Tank batteries - None
- 2. Production facilities will be set on location if the well is successfully completed for production. Facilities will consist of well head valves, combo separator-dehy unit with meter, 300 Bbl vertical or 200 Bbl low profile, condensate tank, and attaching piping. See attached facility diagram.
- 3. Oil gathering lines - None
- 4. Gas gathering lines - A 3" gathering line will be buried from dehy to the edge of the location.
- 5. Injection lines - None
- 6. Disposal lines - None
- 7. Surface pits - None

B. OFF WELL PAD

- 1. Proposed location of attendant off pad flowlines shall be flagged prior to archaeological clearance.
- 2. A 3" OD steel above ground natural gas pipeline will be laid approximately 1625' from proposed location to a point in the SW/4 of Section 6, T10S, R21E, where it will tie into CIG's existing line. Proposed pipeline crosses Federal lands within the Natural Buttes Unit, thus a Right-of-Way grant will not be required.
- 3. Proposed pipeline will be a 3" OD steel, welded line laid on the surface.
- 4. Protective measures and devices for livestock and wildlife will be taken and/or installed where required.

RECEIVED

DEC 04 2000

DIVISION OF
OIL, GAS AND MINING

If storage facilities/tank batteries are constructed on this lease, the facility/battery or the well pad shall be surrounded by a containment dike of sufficient capacity to contain, at a minimum, the entire contents of the largest tank within the facility/battery.

The production facilities will be placed on the West end of the location.

5. LOCATION & TYPE OF WATER SUPPLY

- A. Water supply will be from Ouray Municipal Water Plant at Ouray, Utah, and/or Target Trucking Inc.'s water source in the SW/SW, Sec. 35, T9S, R22E, Uintah County, Utah (State Water Right #49-1501). Produced water from the Natural Buttes, Chapita Wells and Stagecoach Units will also be used.
- B. Water will be hauled by a licensed trucking company.
- C. No water well will be drilled on lease.

6. SOURCE OF CONSTRUCTION MATERIAL

- A. All construction material for this location and access road will be of native borrow and soil accumulated during the construction of the location.
- B. All construction material will come from Federal Land.
- C. No mineral materials will be required.

7. METHODS OF HANDLING WASTE DISPOSAL

A. METHODS AND LOCATION

- 1. Cuttings will be confined in the reserve pit.
- 2. A portable toilet will be provided for human waste during the drilling and completion of the well. Disposal will be at the Vernal sewage disposal plant.
- 3. Burning will not be allowed. Trash and other waste material will be contained in a wire mesh cage and disposed of at an approved waste disposal facility.
- 4. Produced wastewater will be confined to a lined pit or storage tank for a period not to exceed 90 days after initial production. During the 90 day period, an application for approval of a permanent disposal method and location, together with the required water analysis, will be submitted for the AO's approval.
- 5. All chemicals will be disposed of at an authorized disposal site. Drip pans and absorbent pads will be used on the drilling rig to avoid leakage of oil to the pit.

RECEIVED

DEC 04 2000

DIVISION OF
OIL, GAS AND MINING

- B. Water from drilling fluids and recovered during testing operations will be disposed of by either evaporating in the reserve pit or be removed and disposed of at an authorized disposal site. Introduction of well bore hydrocarbons to the reserve pit will be avoided by flaring them off in the flare pit at the time of recovery.

Burning of trash will not be allowed. All trash must be contained in a trash cage and hauled away to an approved disposal site at the completion of the drilling activities.

On BLM administered land:

The reserve pit will be constructed so as not to leak, break, or allow discharge.

The reserve pit shall be lined.

After first production, produced wastewater will be confined to a lined pit or storage tank for a period not to exceed ninety (90) days. During the 90 day period, in accordance with Onshore Order No. 7, an application for approval of a permanent disposal method and location, along with required water analysis, shall be submitted for the AO's approval. Failure to file an application within the time allowed will be considered an incident of noncompliance.

8. ANCILLARY FACILITIES

- A. No airstrips or camps are planned for this well.

9. WELLSITE LAYOUT

- A. Refer to attached well site plat for related topography cuts and fills and cross sections.
B. Refer to attached well site plat for rig layout and soil material stockpile location as approved on On-site.
C. Refer to attached well site plat for rig orientation, parking areas, and access road.

The approved seed mixture for this location is as follows:

5# Western Wheat Grass per Acre

4# Nuttles Salt Bush per Acre

3# Shadscale per Acre

The reserve pit will be located on the South side of the location. The flare pit will be located downwind of the prevailing wind direction on the South side of the location, a minimum of 100 feet from the well head and 30 feet from the reserve pit fence.

The stockpiled pit topsoil will be stored separate from the location topsoil at corner five. The stockpiled location topsoil will be stored on the North

RECEIVED
DEC 04 2000

end of the location between corners 6 & 8. Upon completion of construction, the stockpiled topsoil from the location will be broadcast seeded with the approved seed mixture for this location and then walked down with a cat.

Access to the well pad will be from the Southeast.

X A diversion ditch shall be constructed on the Southeast end of the location above the cut slope, draining to the Northeast.

N/A Soil compacted earthen berm(s) shall be placed on the _____ side(s) of the location between the _____.

N/A The drainage(s) shall be diverted around the sides of the well pad location.

N/A The reserve pit and/or pad locations shall be constructed long and narrow for topographic reasons _____.

X Corner #8 will be rounded off to minimize excavation.

FENCING REQUIREMENTS:

All pits will be fenced according to the following minimum standards:

- A. Thirty-nine inch net wire shall be used with at least one strand of barbed wire on top of the net wire. (Barbed wire is not necessary if pipe or some type of reinforcement rod is attached to the top of the entire fence).
- B. The net wire shall be no more than 2 inches above the ground. The barbed wire strand shall be 3 inches above the net wire. Total height of the fence shall be at least 42 inches.
- C. Corner posts shall be cemented and/or braced in such a manner as to keep the fence tight at all times.
- D. Standard steel, wood, or pipe posts shall be used between the corner braces. Maximum distance between any two posts shall be no greater than 16 feet.
- E. All wire shall be stretched by using a stretching device before it is attached to the corner posts.

The reserve pit fencing will be on the three sides during drilling operations and on the fourth side when the rig moves off the location. Pits will be fenced and maintained until clean-up.

Each existing fence to be crossed by the access road shall be braced and tied off before cutting so as to prevent slacking of the wire. The opening shall be closed temporarily as necessary during construction to prevent the escape of livestock, and, upon completion of construction, the fence shall be repaired to BLM or SMA specifications. A cattleguard with an adjacent 16 foot gate shall be installed in any fence where a road is to be regularly traveled. If the well is a producer, the cattleguards (shall/shall not) be permanently mounted on concrete bases. Prior to

RECEIVED
DEC 04 2000

a new road, crossing any fence located on Federal land, or any fence between Federal land and private land, the operator will contact the BLM, who will in turn contact the grazing permittee or owner of said fence and offer him/her the opportunity to be present when the fence is cut in order to satisfy himself/herself that the fence is adequately braced and tied off.

10. PLANS FOR RESTORATION OF SURFACE

A. PRODUCING LOCATION

Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, equipment, debris, materials, trash, and junk not required for production.

Immediately upon well completion, any hydrocarbons on the pit shall be removed in accordance with CFR 3162.7-1.

If a plastic nylon reinforced liner is used, it shall be torn and perforated before backfilling of the reserve pit.

The reserve pit and that portion of the location not needed for production facilities/operations will be recontoured to the approximate natural contours. The stockpiled pit topsoil will then be spread over the pit area and broadcast seeded with the prescribed seed mixture for this location. The seeded area will then be walked down with a cat.

B. DRY HOLE/ABANDONED LOCATION

At such time as the well is plugged and abandoned, the operator will submit a subsequent report of abandonment and the BLM will attach the appropriate surface rehabilitation conditions of approval.

11. SURFACE OWNERSHIP

Access road: Federal

Location: Federal

12. OTHER INFORMATION

- A. EOG Resources, Inc. will inform all persons in the area who are associated with this project that they are subject to prosecution for knowingly disturbing historic or archaeological sites, or for collecting artifacts. If historic or archaeological materials are uncovered during construction, the operator will immediately stop work that might further disturb such materials, and contact the AO. Within five working days the AO will inform the operator as to:

-whether the materials appear eligible for the National Register
Places;

RECEIVED

DEC 04 2000

-the mitigation measures the operator will likely have to undertake before the site can be used.

-a time frame for the AO to complete an expedited review under 36 CFR 800.11 to confirm, through the State Historic Preservation Officer, that the findings of the AO are correct and that mitigation is appropriate.

If the operator wished, at any time, to relocate activities to avoid the expense of mitigation and/or the delays associated with this process, the AO will assume responsibility for whatever recordation and stabilization of the exposed materials that may be required. Otherwise, the operator will be responsible for mitigation costs. The AO will provide technical and procedural guidelines for the conduct of mitigation. Upon verification from the AO that required mitigation has been completed, the operator will then be allowed to resume construction.

- B. As operator, EOG Resources, Inc. will control noxious weeds along Right-of-Ways for roads, pipelines, well sites, or other applicable facilities. A list of noxious weeds will be obtained from the BLM, or the appropriate County Extension Office. On BLM administered land, a Pesticide Use proposal shall be submitted, and given approval, prior to the application of herbicides or other pesticides or possible hazardous chemicals.
- C. Drilling rigs and/or equipment used during drilling operations on this well site will not be stacked or stored on BLM lands after the conclusion of drilling operations or at any other time without BLM authorization. However, if BLM authorization is obtained, it is only a temporary measure to allow time to make arrangements for permanent storage on commercial facilities. (The BLM does not seek to compete with private industry. There are commercial facilities available for stacking and storing drilling rigs.)

Additional Surface Stipulations

- N/A No construction or drilling activities shall be conducted between _____ and _____ because of _____.
- N/A No surface occupancy will be allowed within 1,000 feet of any sage grouse strutting ground.
- N/A No construction or exploration activities are permitted within a 1.5 mile radius of sage grouse strutting grounds from April 1 to June 30.
- N/A There shall be no surface disturbance within 600 feet of live water (includes stock tanks, springs, and guzzlers).
- N/A No cottonwood trees will be removed or damaged.
- X A pond will be constructed according to BLM specifications.

RECEIVED

DEC 04 2000

DIVISION OF
OIL, GAS AND MINING

LESSEE'S OR OPERATOR'S REPRESENTATIVE AND CERTIFICATION

OPERATIONS

EOG Resources, Inc.
P.O. Box 250
Big Piney, WY 83113
Jim Schaefer
Telephone (307)276-3331

EOG Resources, Inc.
P.O. Box 1815
Vernal, UT 84078
George McBride
Telephone (435)789-0790

PERMITTING

Ed Trotter
P.O. Box 1910
Vernal, UT 84078
Telephone: (435)789-4120
Fax: (435)789-1420

All lease or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, Onshore Oil and Gas Orders, the approval plan of operations, and any applicable Notice to Lessees. EOG Resources, Inc. is fully responsible for the actions of their subcontractors. A copy of these conditions will be furnished to the field representative to insure compliance.


A copy of the approved APD and ROW grant, if applicable, shall be on location during construction of the location and drilling activities.

Certification

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drillsite and access route; that I am familiar with the conditions that presently exist; that the statements made in the Plan are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed by EOG Resources, Inc. and its contractors and subcontractors in conformity with this Plan and the terms and conditions under which it is approved.

11-22-2000

Date


Agent

RECEIVED

DEC 04 2000

DIVISION OF
OIL, GAS AND MINING

SITE FACILITY DIAGRAM

NBU 392-6E
NE/SE, SEC. 6, T10S, R21E
UINTAH COUNTY, UTAH
LEASE NO. U-01791
FEDERAL LANDS

N




RECEIVED

DEC 04 2000

DIVISION OF
OIL, GAS AND MINING

(Site Security Plan is on file at EOG Resources, Inc.'s Vernal Office)

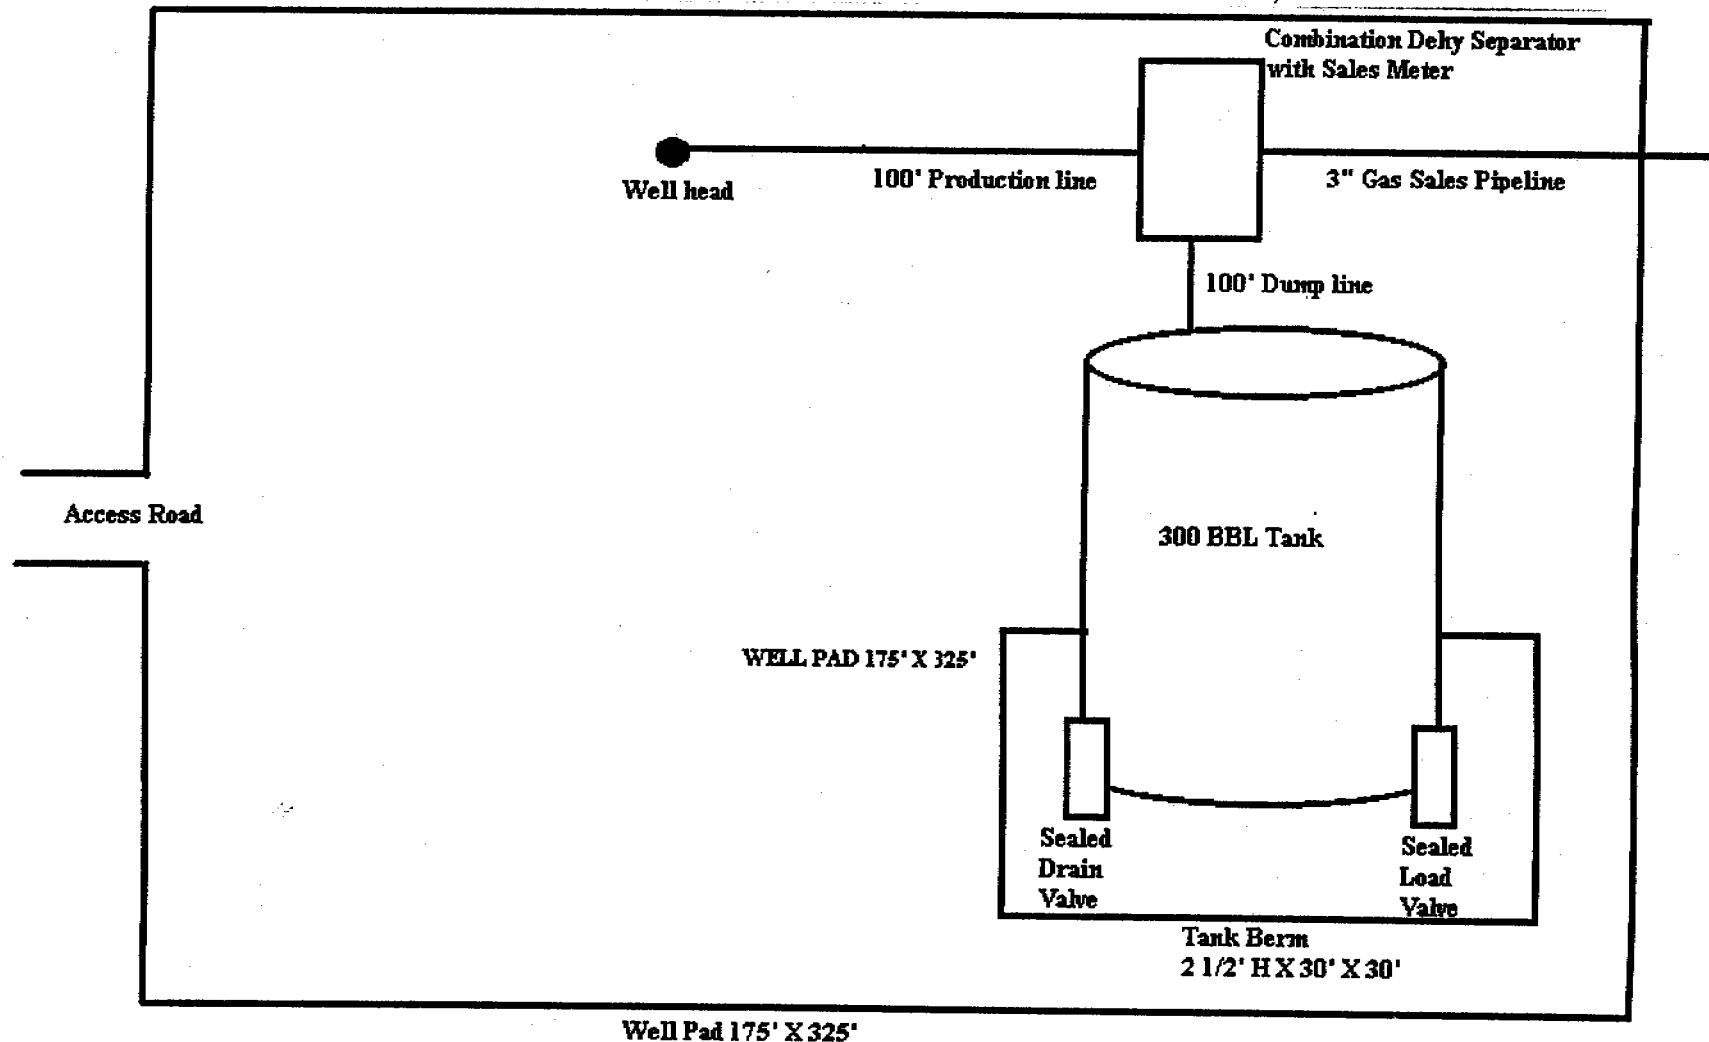



ENRON OIL & GAS CO.

LOCATION LAYOUT FOR

NBU #392-6E

SECTION 6, T10S, R21E, S.L.B.&M.

1926' FSL 611' FEL



C-2.5'
El. 17.7'

F-2.7'
El. 12.5' Top Soil

Sta. 3+25

SCALE: 1" = 50'
DATE: 10-28-97
Drawn By: D.COX

Approx.
Top of
Cut Slope

Round Corners
as needed

Approx.
Toe of
Fill Slope

NOTE:

Flare Pit is to
be located a min.
of 100' from the
Well Head.

El. 20.4'
C-13.2'
(btm. pit)

FLARE PIT

C-4.3'
El. 19.5'

C-1.9'
El. 17.1'

F-3.8'
El. 11.4'

Sta. 1+50

Sta. 0+37

10' WIDE BENCH

Reserve Pit Backfill
& Spoils Stockpile

Pit Capacity
With 2' of
Freeboard is
± 4,140 Bbls.

RESERVE PITS
(8' Deep)

MUD TANKS

RIG

DOG HOUSE

WATER

PUMP

MUD SHED

HOPPER

POWER

TOOLS

FUEL

TRAILER

TOILET

FUEL

STORAGE TANK

Drainage

Drainage

Proposed Access
Road

Construc
Diversion Ditch

DEC 04 2000

DIVISION OF
OIL AND GAS SURVEYING

85 So. 200 East • Vernal, Utah 84078 • (801) 789-1017

Elev. Ungraded Ground at Location Stake = 5017.1'

Elev. Graded Ground at Location Stake = 5015.2'

RECEIVED

DEC 04 2000

DIVISION OF
OIL AND GAS SURVEYING

85 So. 200 East • Vernal, Utah 84078 • (801) 789-1017


ENRON OIL & GAS CO.

TYPICAL CROSS SECTIONS FOR

NBU #392-6E



SECTION 6, T10S, R21E, S.L.B.&M.

1926' FSL 611' FEL




DATE: 10-28-97


Drawn By: D.COX

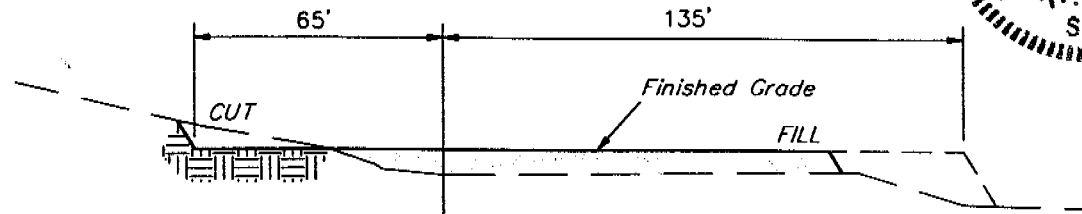


STA. 3+25

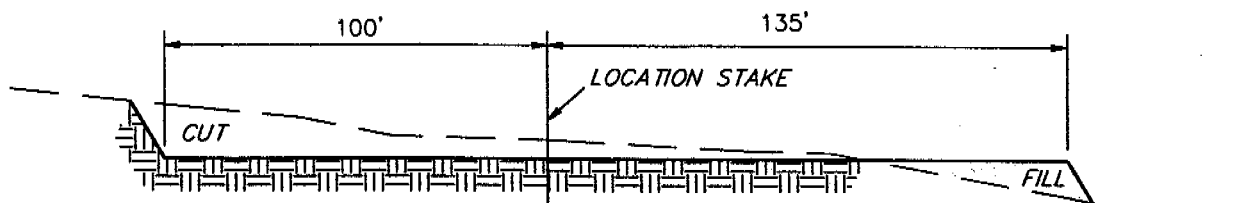

STA. 1+50

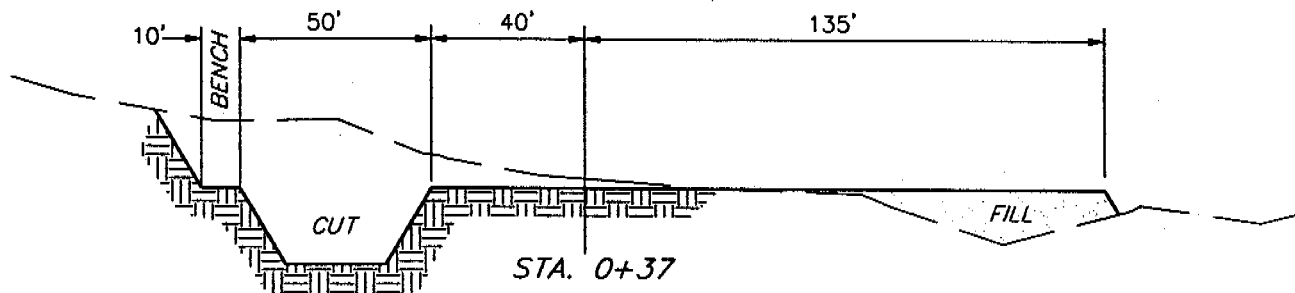

STA. 0+37

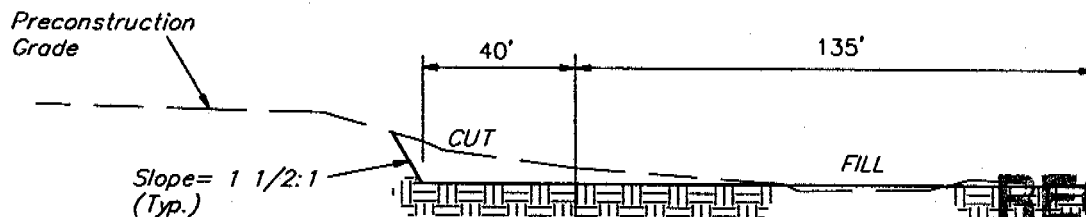

STA. 0+00

RECEIVED


DEC 04 2000

APPROXIMATE YARDAGES

(6") Topsoil Stripping	= 1,250 Cu. Yds.
Remaining Location	= 4,230 Cu. Yds.
TOTAL CUT	= 5,480 CU.YDS.
FILL	= 3,390 CU.YDS.

EXCESS MATERIAL AFTER 5% COMPACTION	= 1,910 Cu. Yds.
Topsoil & Pit Backfill (1/2 Pit Vol.)	= 1,900 Cu. Yds.
EXCESS UNBALANCE (After Rehabilitation)	= 10 Cu. Yds.

UINTAH ENGINEERING & LAND SURVEYING
85 So. 200 East • Vernal, Utah 84078 • (801) 789-1017

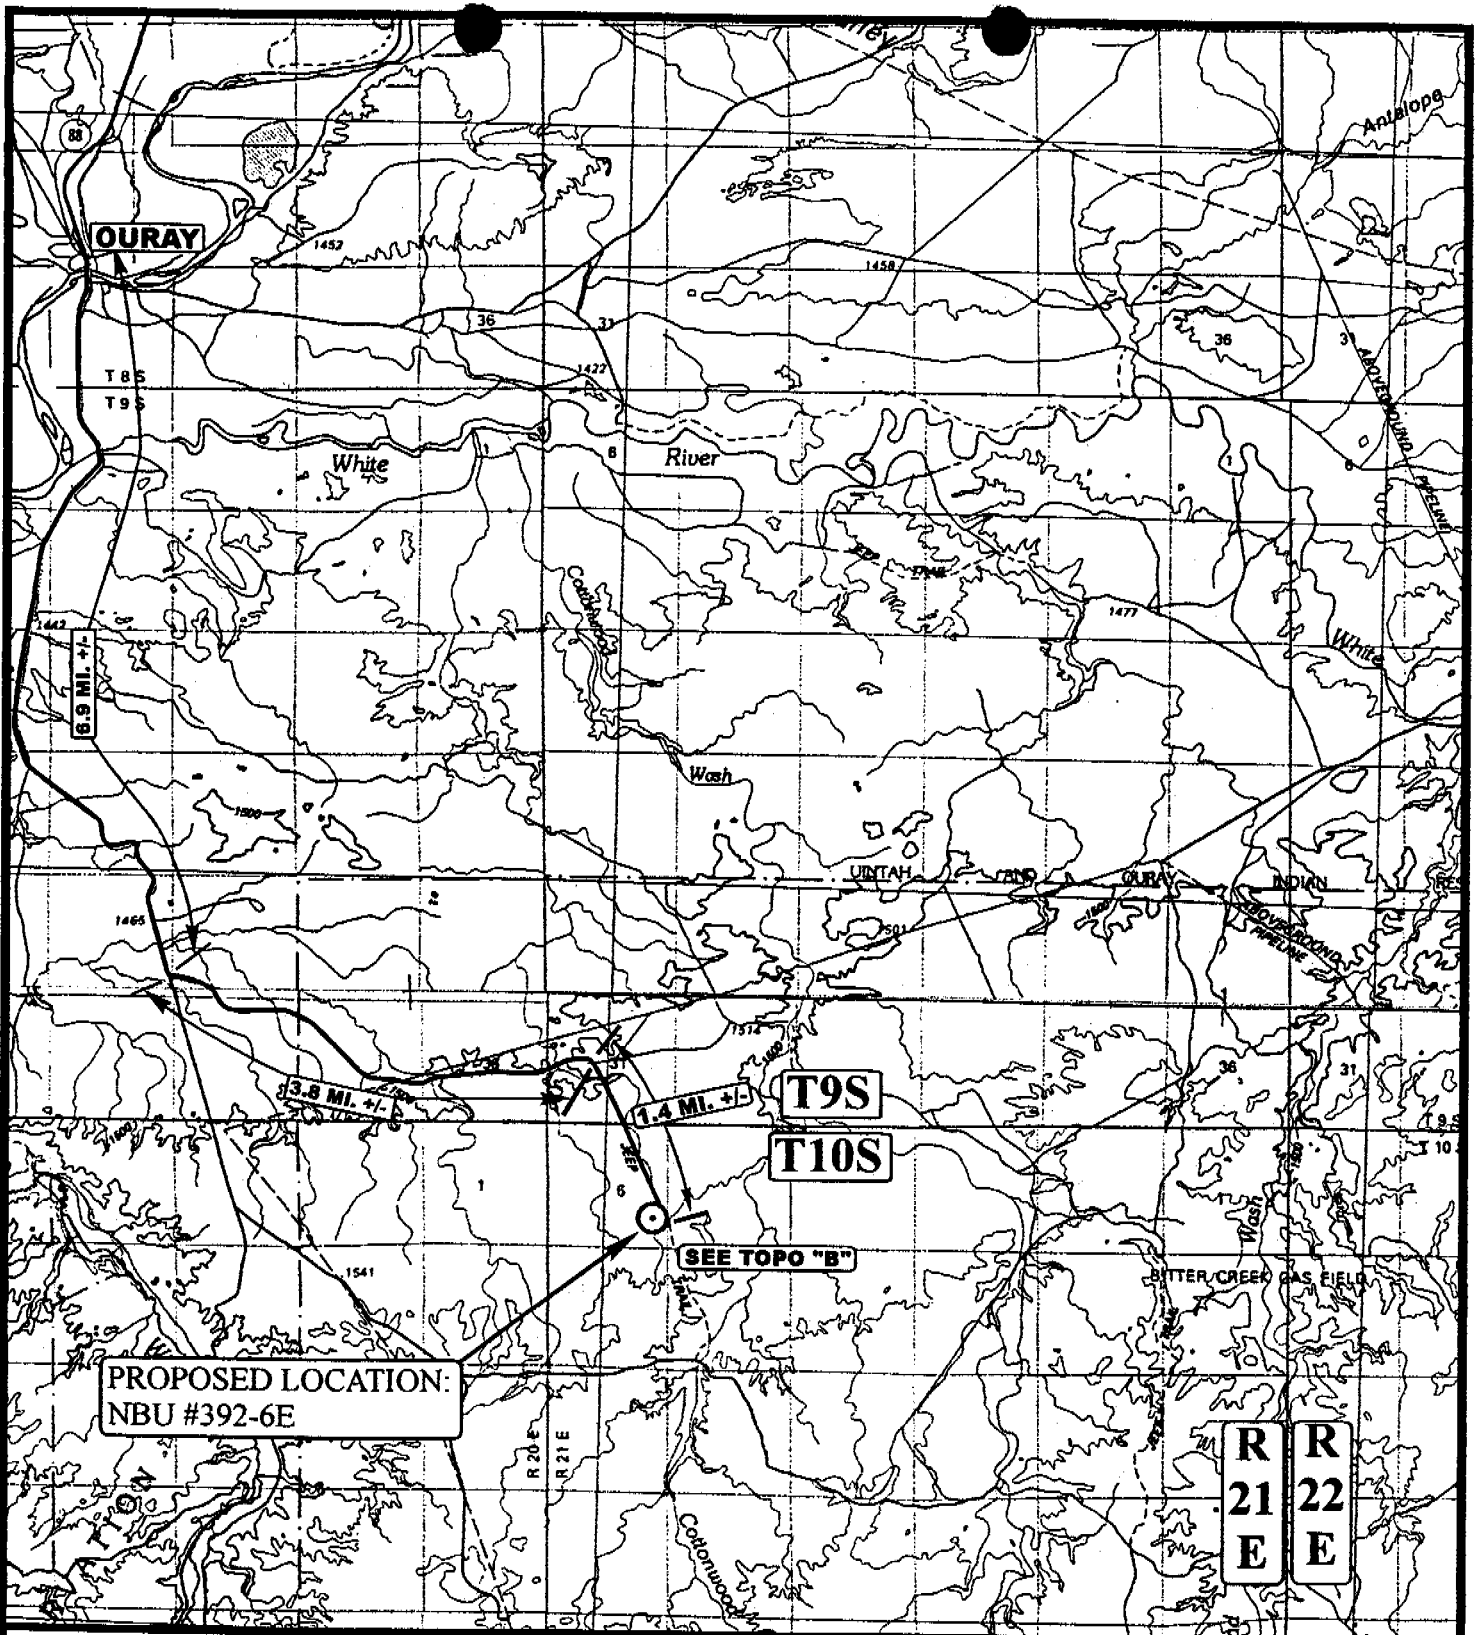

LEGEND:

○ PROPOSED LOCATION



ENRON OIL & GAS COMPANY

NBU #392-6E

SECTION 6, T10S, R21E, S.L.B.&M.

1926' FSL 611' FEL




Utah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (801) 789-1017 * FAX (801) 789-1813
 Email: uels@easilink.com

TOPOGRAPHIC
MAP

10 24 97
 MONTH DAY YEAR

SCALE: 1:100,000 DRAWN BY: C.G. REVISED: 00-00-00

A
TOPO

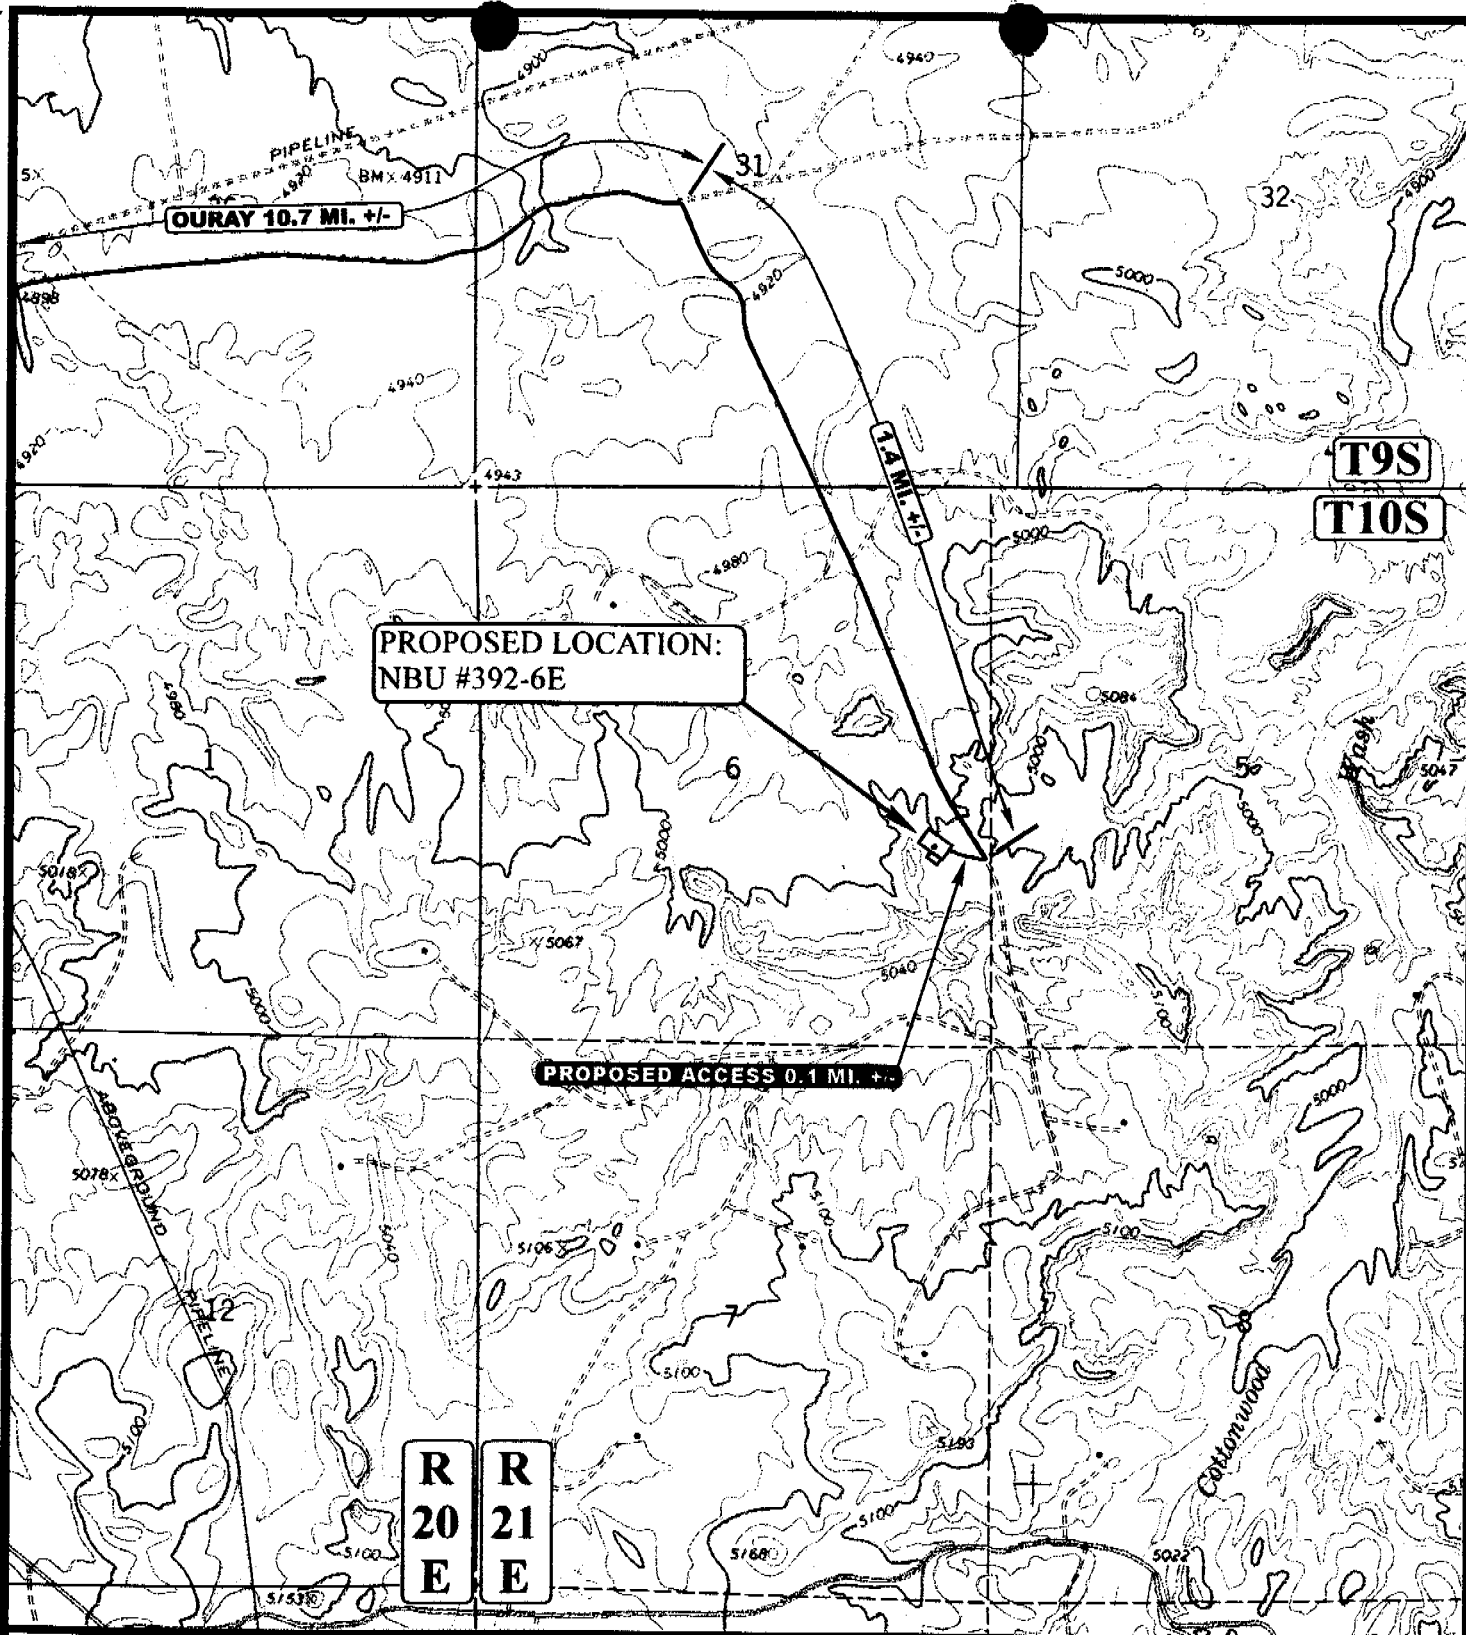

LEGEND:

--- PROPOSED ACCESS ROAD
 --- EXISTING ROAD

ENRON OIL & GAS COMPANY

NBU #392-6E
 SECTION 6, T10S, R21E, S.L.B.&M.
 1926' FSL 611' FEL




Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (801) 789-1017 * FAX (801) 789-1813
 Email: uels@casilink.com







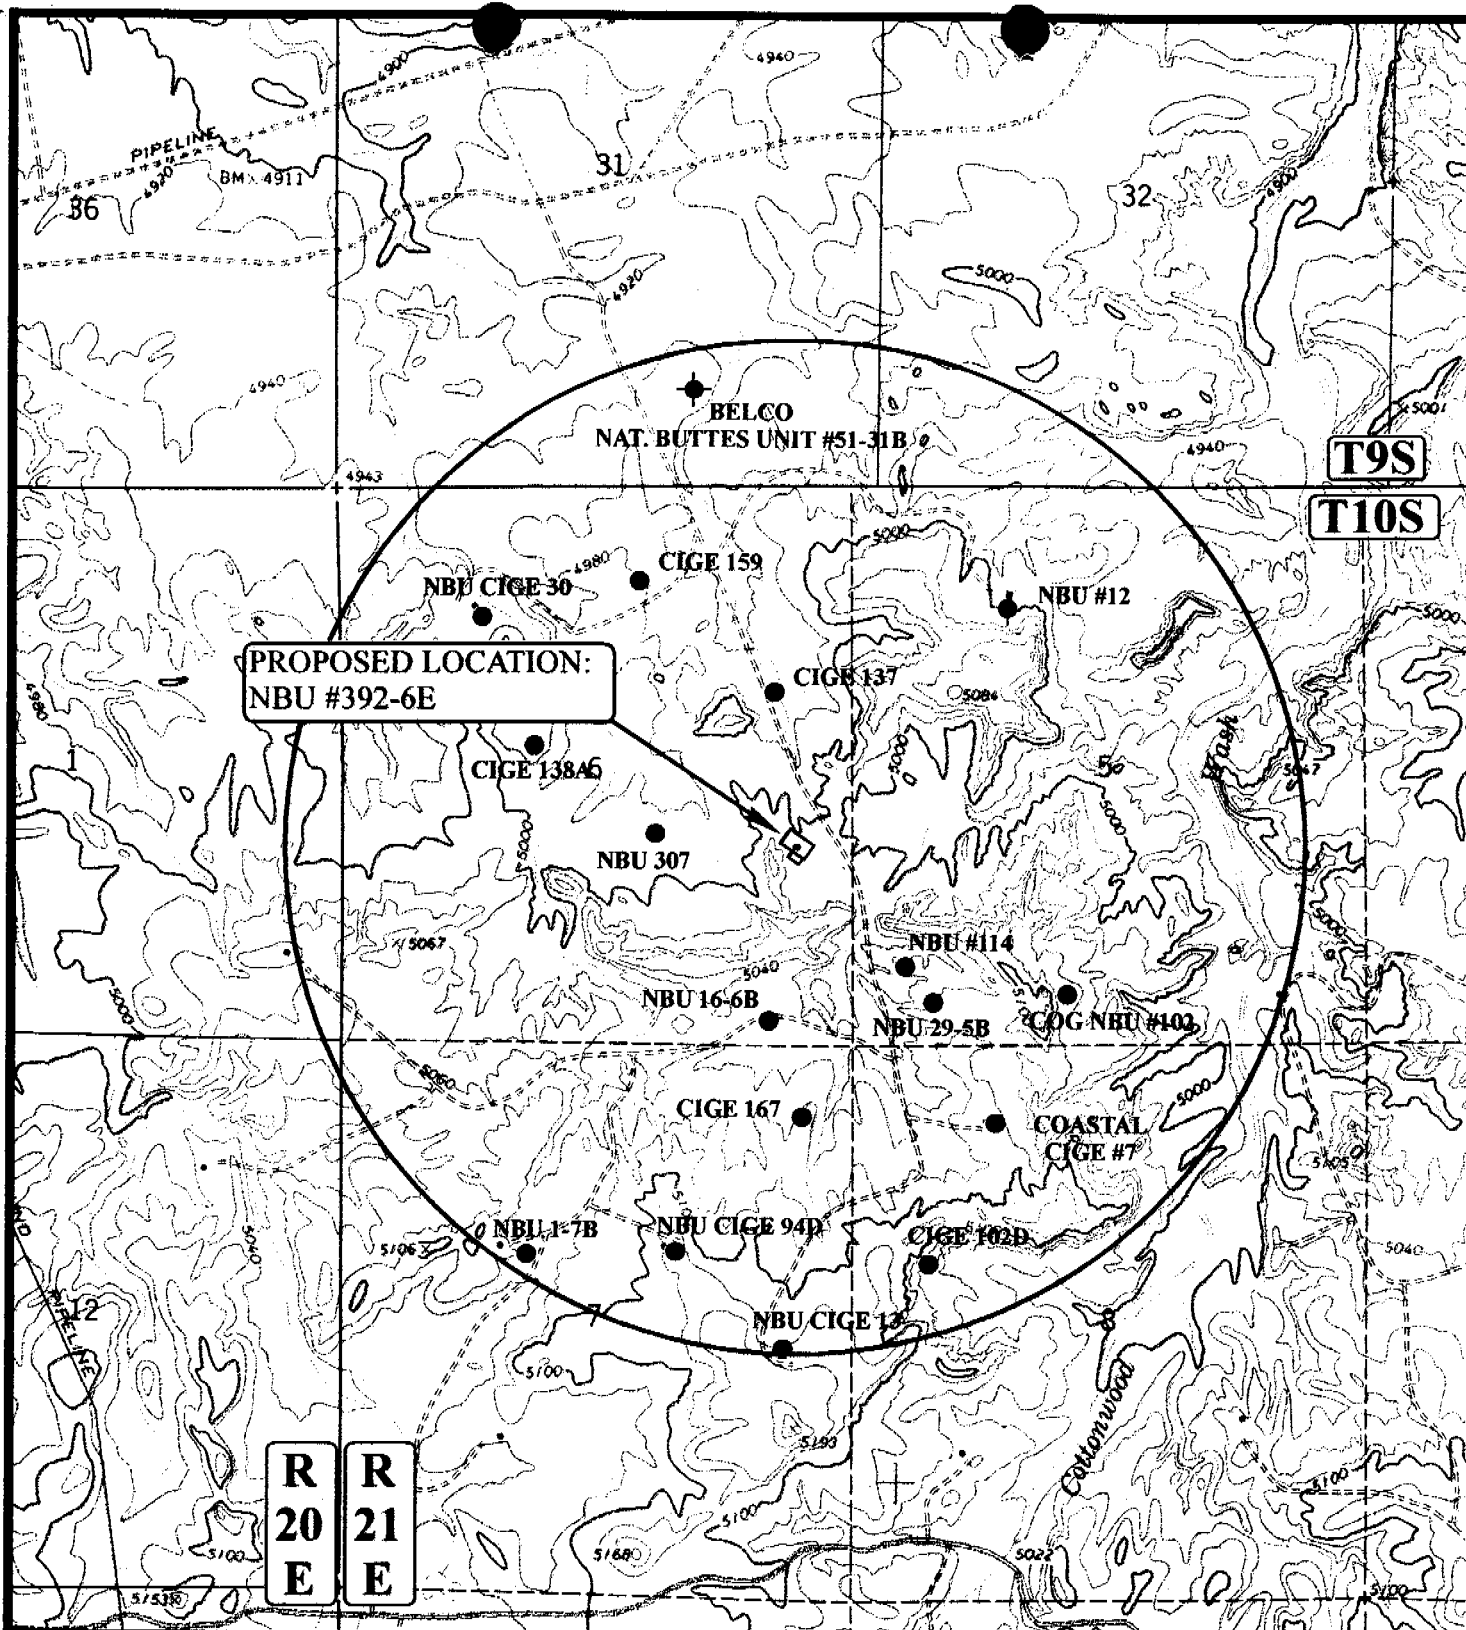

TOPOGRAPHIC MAP
 10/24/97
 MONTH DAY YEAR
 SCALE: 1" = 2000' DRAWN BY: C.G. REVISED: 00-00-00





LEGEND:

- | | |
|---|---|
|  DISPOSAL WELLS |  WATER WELLS |
|  PRODUCING WELLS |  ABANDONED WELLS |
|  SHUT IN WELLS |  TEMPORARILY ABANDONED |



ENRON OIL & GAS COMPANY


NBU #392-6E
SECTION 6, T10S, R21E, S.L.B.&M.
1926' FSL 611' FEL

TOPOGRAPHIC		10	24	97
MAP		MONTH	DAY	YEAR
SCALE: 1" = 2000'	DRAWN BY: C.G.	REVISED: 00-00-00		

C
COPEC

U.S.

Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(801) 789-1017 * FAX (801) 789-1813
Email: uels@easilink.com

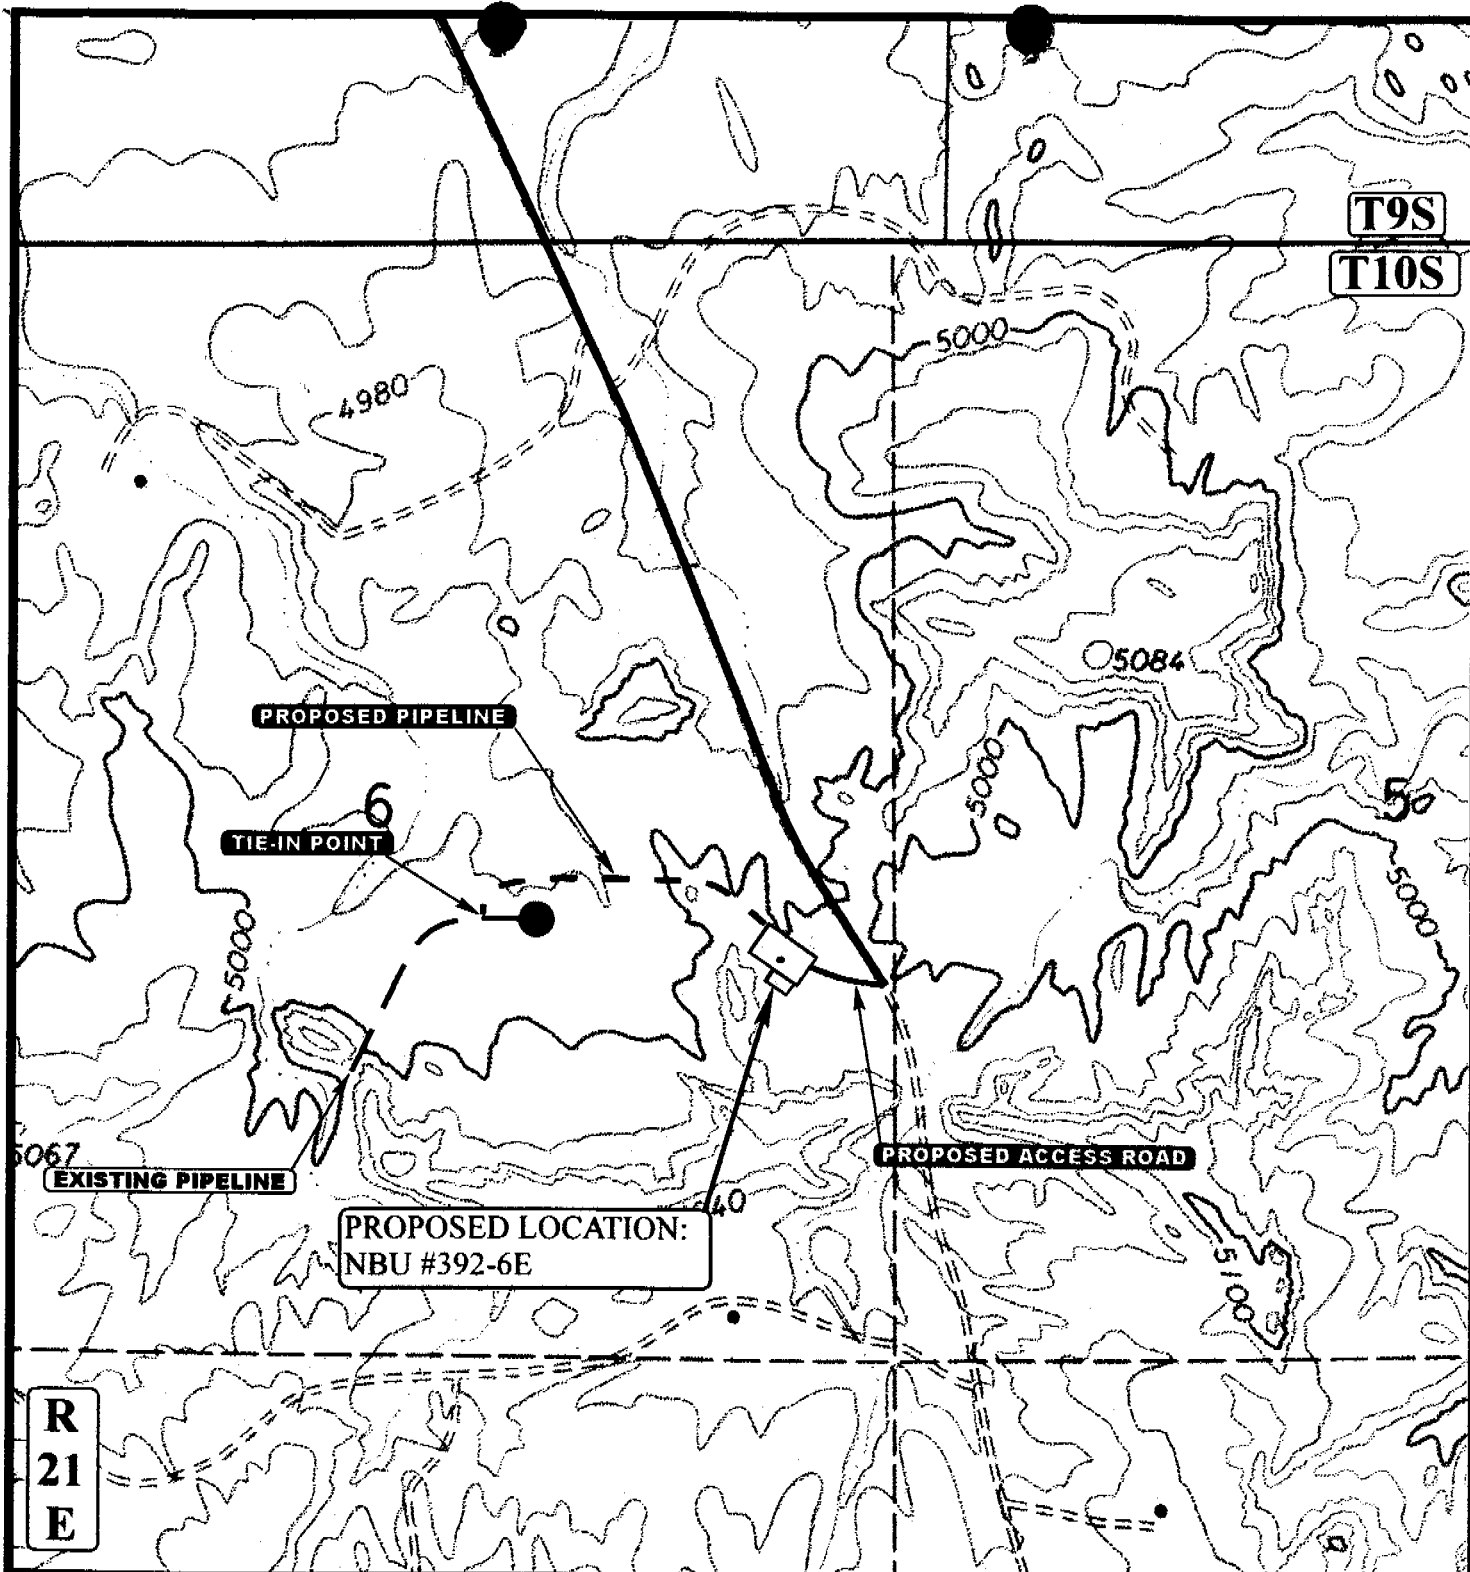

APPROXIMATE TOTAL PIPELINE DISTANCE = 1625' +/-

LEGEND:

- EXISTING PIPELINE
- - - PROPOSED PIPELINE
- - - PROPOSED ACCESS



ENRON OIL & GAS COMPANY

NBU #392-6E

SECTION 6, T10S, R21E, S.L.B.&M.

1926' FSL 611' FEL

TOPOGRAPHIC
MAP

10 24 97
MONTH DAY YEAR

SCALE: 1" = 1000' **DRAWN BY: C.G.** **REVISED: 00-00-00**

D
TOPO



Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(801) 789-1017 * FAX (801) 789-1813
Email: uels@easilink.com

WORKSHEET
APPLICATION FOR PERMIT TO DRILL

APD RECEIVED: 12/04/2000

API NO. ASSIGNED: 43-047-33783

WELL NAME: NBU 392-6E

OPERATOR: EOG RESOURCES INC (N9550)

CONTACT: ED TROTTER, AGENT

PHONE NUMBER: 435-789-4120

PROPOSED LOCATION:

NESE 06 100S 210E

SURFACE: 1926 FSL 0611 FEL

BOTTOM: 1926 FSL 0611 FEL

UINTAH

NATURAL BUTTES (630)

LEASE TYPE: 1-Federal

LEASE NUMBER: U-01791

SURFACE OWNER: 1-Federal

PROPOSED FORMATION: WSTC

INSPECT LOCATN BY: / /

Tech Review	Initials	Date
Engineering		
Geology		
Surface		

RECEIVED AND/OR REVIEWED:

☒ Plat

☒ Bond: Fed[1] Ind[] Sta[] Fee[]
(No. NM-2308)

☒ Potash (Y/N)

☒ Oil Shale (Y/N) *190-5 (B) or 190-3

☒ Water Permit
(No. MUNICIPAL)

☒ RDCC Review (Y/N)
(Date:)

☒ Fee Surf Agreement (Y/N)

LOCATION AND SITING:

☐ R649-2-3. Unit NATURAL BUTTES

☐ R649-3-2. General

☐ Siting: 460 From Qtr/Qtr & 920' Between Wells

☐ R649-3-3. Exception

☒ Drilling Unit

Board Cause No: 173-14

Eff Date: 12-2-99


Siting: 460' fr Unit Boundary & Uncomm. Lands

☐ R649-3-11. Directional Drill


COMMENTS:

STIPULATIONS:

① FEDERAL APPROVAL
② OIL SHALE



COUNTY: UINTAH UNIT: NATURAL BUTTES
CAUSE: 173-14





EOG Resources, Inc.
600 Seventeenth St., Ste. 1100 N
Denver, CO 80202
(303) 572-9000
Fax (303) 824-5400

TO: Lisha Cordova FROM: Toni Miller

COMPANY: Division of Oil, Gas and Mining - State of Utah CO/DEPT: EOG Resources, Inc.


FAX #: (801) 359-3940 PHONE#: (303) 572-9000

FAX #: (303) 824-5401

TOTAL NUMBER OF PAGES (including this page) 4 DATE: December 8, 2000

If you do not receive this transmission in its entirety, please call Karen Erwin
at (303) 824-5438.

RE: NBU 392-6E and 484-20E



THE INFORMATION CONTAINED IN THIS FACSIMILE MESSAGE IS CONFIDENTIAL INFORMATION INTENDED ONLY FOR THE USE OF THE INDIVIDUAL OR AGENT RESPONSIBLE TO DELIVER IT TO THE INTENDED RECIPIENT. YOU ARE HEREBY NOTIFIED THAT ANY DISSEMINATION, DISTRIBUTION OR COPYING OF THIS COMMUNICATION IS STRICTLY PROHIBITED. IF YOU HAVE RECEIVED THIS COMMUNICATION IN ERROR, PLEASE IMMEDIATELY NOTIFY US BY TELEPHONE, AND RETURN THE ORIGINAL MESSAGE TO US AT THE ABOVE ADDRESS VIA THE U.S. POSTAL SERVICE.

energy opportunity growth

DESIGNATION OF AGENT

Robert A. Henricks
Chief, Branch of Fluid Minerals

The undersigned is, on the records of the Bureau of Land Management, Unit Operator under the Natural Buttes Unit Agreement, Uintah County, Utah, No. 14-08-00018900 approved January 5, 1968, and hereby designates:

NAME: Enron Oil & Gas Company
ADDRESS: P.O. Box 1815
Vernal, Utah 84078

as its agent, with full authority to act in its behalf in complying with the terms of the unit agreement and regulations applicable thereto and on whom the supervisor or his representative may serve written or oral instructions in securing compliance with the Oil and Gas Operating Regulations with respect to drilling, testing, and completing the unit wells listed on the attached Exhibit "A" which are located in Uintah County, Utah.

This designation of agent does not relieve the Unit Operator of responsibility for compliance with the terms of the unit agreement. It is also understood that this designation of agent does not constitute an assignment of any interest under the unit agreement or any lease committed thereto.

The designated agent will be responsible for compliance with the Oil and Gas Operating Regulations as they relate to the drilling, testing, and completing of each of the subject wells. In accordance with 3104.2, bonding shall be provided by Enron Oil & Gas Company, Bond No. 81307603.

This designation of agent is deemed to be temporary and in no manner a permanent arrangement.

This designation is given only to enable the agent herein designated to drill the above specified unit wells. Unless sooner terminated, this designation shall terminate as to each well when there is filed in the appropriate district office of the Bureau of Land Management a completed file of all required Federal reports pertaining to that well. At which time the Unit Operator shall assume all liability of that well and bonding shall be provided by the Unit Operator or as otherwise arranged by the unit agreement. It is also understood that this designation of agent is limited to field operations and does not cover administrative actions requiring specific authorization of the Unit Operator.

COASTAL OIL & GAS CORPORATION, Unit Operator

By: C. E. Lindberg
C. E. Lindberg, Vice President

Date: October 27, 1997

15974T

APPROVED - EFFECTIVE DEC 04 1997

UNIT OPERATOR OF BLM

EXHIBIT "A"

Attached to and made a part of that certain Designation of Agent dated October 27, 1997, 1997, from Coastal Oil & Gas Corporation to Enron Oil & Gas Company.

WELL NAME	LOCATION			
	DIV	SEC	TWP	RGE
NBU 386-24E	SESW	24	9S	21E
NBU 481-3E	SESE	9	9S	21E
NBU 483-19E	NESW	19	9S	21E
NBU 382-18E	NWSE	18	9S	21E
NBU 394-13E	SESW	13	10S	20E
NBU 431-9E	SWNW	9	10S	21E
NBU 391-5E	SWSE	5	10S	21E
NBU 341-29E	SESE	29	9S	22E
NBU 388-19E	SESW	19	9S	22E
NBU 393-13E	NWSE	13	10S	20E
* * NBU 379-2E	NWSW	2	9S	21E
NBU 491-3E	SESW	3	9S	21E
NBU 496-10E	NESW	10	9S	21E
NBU 409-17E	SENE	17	9S	21E
NBU 484-20E	NWNW	20	9S	21E
NBU 489-7E	SWSW	7	9S	21E
NBU 492-7E	NWNW	7	9S	21E
NBU 322-15E	SESE	15	9S	20E
NBU 497-1E	NESE	1	10S	20E
NBU 344-12E	NWNE	12	10S	20E
NBU 390-4E	NESW	4	10S	21E
NBU 392-6E	NESE	6	10S	21E
NBU 486-7E	NESW	7	10S	21E
NBU 487-8E	NESE	8	10S	21E
NBU 446-20E	NWSW	20	9S	22E
NBU 488-20E	SWSE	20	9S	22E
NBU 389-29E	NWSE	29	9S	22E
NBU 456-2E	NWNW	2	10S	22E
NBU 485-36E	NWNE	36	9S	22E
NBU 451-1E	NESW	1	10S	22E
NBU 494-12E	SWSW	12	9S	21E
NBU 493-13E	SESE	13	9S	20E

* * not to be drilled within 500' of unit boundary without prior approval of the BLM.

EXHIBIT "A"
(continued)

WELL NAME	LOCATION			
	DIV	SEC	TWP	RGE
NBU 506-23E	NENW	23	9S	20E
NBU 499-15E	NESE	15	9S	20E
NBU 498-13E	NESE	13	10S	20E
NBU 384-23E	SESE	23	9S	21E
NBU 385-24E	NWSW	24	9S	21E
NBU 387-24E	SWNW	24	9S	21E
NBU 380-7E	SENW	7	9S	21E
NBU 383-23E	NENE	23	9S	21E
NBU 490-30E	NESW	30	9S	21E
NBU 495-31E	SESW	31	9S	21E
NBU 319-17E	NWNW	17	10S	21E
NBU 482-11E	NWSE	11	9S	21E
NBU 501-12E	SESE	12	9S	20E
NBU 500-19E	SESW	19	9S	21E
NBU 440-1E	NWSE	1	10S	20E
NBU 507-7E	SESW	7	10S	21E

All Township and Range references are South and East of the Salt Lake Meridian in Uintah County, Utah.

15974T



State of Utah
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

Michael O. Leavitt
Governor
Kathleen Clarke
Executive Director
Lowell P. Braxton
Division Director

1594 West North Temple, Suite 1210
PO Box 145801
Salt Lake City, Utah 84114-5801
801-538-5340
801-359-3940 (Fax)
801-538-7223 (TDD)

December 12, 2000

EOG Resources, Inc.
PO Box 1815
Vernal, UT 84078


Re: Natural Buttes Unit 392-6E Well, 1926' FSL, 611' FEL, NE SE, Sec. 6, T. 10 South,
R. 21 East, Uintah County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. § 40-6-1 *et seq.*, Utah Administrative Code R649-3-1 *et seq.*, and the attached Conditions of Approval, approval to drill the referenced well is granted.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-047-33783.

Sincerely,



John R. Baza
Associate Director

er

Enclosures

cc: Uintah County Assessor
Bureau of Land Management, Vernal District Office

Operator: EOG Resources, Inc.
Well Name & Number Natural Buttes Unit 392-6E
API Number: 43-047-33783
Lease: U 01791

Location: NE SE Sec. 6 T. 10 South R. 21 East

Conditions of Approval

1. General

Compliance with the requirements of Utah Admin. R. 649-1 *et seq.*, the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

2. Notification Requirements

Notify the Division within 24 hours of spudding the well.

- Contact Carol Daniels at (801) 538-5284.

Notify the Division prior to commencing operations to plug and abandon the well.

- Contact Dan Jarvis at (801) 538-5338

3. Reporting Requirements

All required reports, forms and submittals will be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

4. In accordance with Order in Cause No. 190-5(b) dated October 28, 1982, the Operator shall comply with requirements of Rules R649-3-31 and R649-3-27 pertaining to Designated Oil Shale Areas. Additionally, the operator shall ensure that the surface and/or production casing is properly cemented over the entire oil shale interval as defined by Rule R649-3-31. The Operator shall report the actual depth the oil shale is encountered to the Division.

5. State approval of this well does not supersede the required federal approval, which must be obtained prior to drilling.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR DEEPEN

1a. TYPE OF WORK

DRILL ☒

DEEPEN ☐

b. TYPE OF WELL

Oil

Gas

Single

Multiple

Well

Well

Other

Zone

Zone

2. Name of Operator

EOG RESOURCES, INC.

3. Address and Telephone Number

P.O. BOX 1815, VERNAL, UT 84078 (435)789-0790

4. Location of Well (Report location clearly and in accordance with any State requirements.)

At surface

1926' FSL & 611' FEL NE/SE

At proposed prod. Zone

14. Distance in miles and direction from nearest town or post office

12.2 MILES SOUTHEAST OF OURAY, UTAH

15. Distance from proposed location to nearest property or lease line, ft.

611'

(Also to nearest drig. Unit line, if any)

18. Distance from proposed location to nearest well, drilling, completed, or applied for, on this lease, ft.

16. No. of acres in lease

2163.60

19. Proposed depth

6510'

21. Elevations (show whether DF, RT, GR, etc.)

5015 FEET GRADED GROUND

5. Lease designation and serial number

U-01791

6. If Indian, Allottee or Tribe name

N/A

7. Unit Agreement Name

NATURAL BUTTES UNIT

8. Farm or lease name, well no.

NATURAL BUTTES UNIT

9. API Well No.

NBU 392-6E

10. Field and pool, or wildcat

WASATCH

11. Sec., T., R., M., or BLK.

and survey or area

SEC. 6, T10S, R21E

12. County or parish

UINTAH

13. State

UTAH

17. No. of acres assigned to this well

80

20. Rotary or cable tools

ROTARY

22. Approx. date work will start

DECEMBER 2000

23. PROPOSED CASING AND CEMENTING PROGRAM

SIZE OF HOLE	GRADE, SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	QUANTITY OF CEMENT
11"	8 5/8"	24#	200' - 220'	100-150 SX CLASS "G" + 2%
or 12 1/4"	9 5/8"	32.30#	200 - 220'	CaCl2 + 1/4 #/SX CELLOFLAKE.
7 7/8"	4 1/2"	10.50#	6510'	50/50 POXMIX + 2% GEL + 10%

SALT TO 400' ABOVE ALL ZONES OF INTEREST (+10% EXCESS).
LIGHT CEMENT (11PPG+) +
LCM TO 200' ABOVE OIL SHALE OR FRESH WATER INTERVALS (+ 5% EXCESS).

SEE ATTACHMENTS FOR:

8 POINT PLAN
BOP SCHEMATIC
SURFACE USE AND OPERATING PLAN
LOCATION PLAT
LOCATION LAYOUT
TOPOGRAPHIC MAPS "A", "B", AND "C"
GAS SALES PIPELINE—MAP "D"
FACILITY DIAGRAM

EOG RESOURCES, INC. WILL BE THE DESIGNATED OPERATOR OF THE SUBJECT WELL UNDER NATION WIDE BOND #NM 2308

Pc: UTAH DIVISION OF OIL, GAS, AND MINING

RECEIVED

NOV 30 2000

IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: If proposal is to deepen, give data on present productive zone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout preventer program, if any.

24.

SIGNED

TITLE Agent

DATE 11-22-2000

(This space for Federal or State office use)

PERMIT NO.

APPROVAL DATE

NOTICE OF APPROVAL

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

CONDITIONS OF APPROVAL, IF ANY:

Assistant Field Manager
Mineral Resources

APPROVED BY

TITLE

DATE 02/01/01

CONDITIONS OF APPROVAL ATTACHED

01050163A

CONDITIONS OF APPROVAL
APPLICATION FOR PERMIT TO DRILL

Company/Operator: EOG Resources Inc.

Well Name & Number: NBU 392-6E

API Number: 43-047-33783

Lease Number: U - 01791

Location: NESE Sec. 06 T. 10S R. 21E

Agreement: NATURAL BUTTES UNIT

For more specific details on notification requirements, please check the Conditions of Approval for Notice to Drill and Surface Use Program.

CONDITIONS OF APPROVAL FOR NOTICE TO DRILL

Approval of this application does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Be aware fire restrictions may be in effect when location is being constructed and/or when well is being drilled. Contact the appropriate Surface Management Agency for information.

A. DRILLING PROGRAM

1. Estimated Depth at Which Oil, Gas, Water, or Other Mineral Bearing Zones are Expected to be Encountered

Report ALL water shows and water-bearing sands to Tim Ingwell of this office **prior to setting the next casing string or requesting plugging orders**. Faxed copies of State of Utah form OGC-8-X are acceptable. If noticeable water flows are detected, submit samples to this office along with any water analyses conducted.

All usable water and prospectively valuable minerals (as described by BLM at onsite) encountered during drilling, will be recorded by depth and adequately protected. All oil and gas shows will be tested to determine commercial potential.

2. Pressure Control Equipment

The BOP and related equipment shall meet the minimum requirements of Onshore Oil and Gas Order No. 2 for equipment and testing requirements, procedures, etc., for a **3M** system and individual components shall be operable as designed. Chart recorders shall be used for all pressure tests.

Test charts, with individual test results identified, shall be maintained on location while drilling and shall be made available to a BLM representative upon request.

If an air compressor is on location and is being utilized to provide air for the drilling medium while drilling, the special drilling requirements in Onshore Oil and Gas Order No. 2, regarding air or gas drilling shall be adhered to. If a mist system is being utilized then the requirement for a deduster shall be waived.

3. Casing Program and Auxiliary Equipment

Surface casing shall have centralizers on the bottom three joints, with a minimum of one centralizer per joint.

As a minimum, the usable water shall be isolated and/or protected by having a cement top for the production casing at least 200 ft. above the top of the Green River Formation, identified at 1,165 ft. If gilsonite is encountered while drilling, it shall be isolated and/or protected via the cementing program.

4. Mud Program and Circulating Medium

Hazardous substances specifically listed by the EPA as a hazardous waste or demonstrating a characteristic of a hazardous waste will not be used in drilling, testing, or completion operations.

No chromate additives will be used in the mud system on Federal and Indian lands without prior BLM approval to ensure adequate protection of fresh water aquifers.

5. Coring, Logging and Testing Program

Daily drilling and completion progress reports shall be submitted to this office on a weekly basis.

All Drill Stem tests (DST) shall be accomplished during daylight hours, unless specific approval to start during other hours is obtained from the AO. However, DSTs may be allowed to continue at night if the test was initiated during daylight hours and the rate of flow is stabilized and if adequate lighting is available (i.e., lighting which is adequate for visibility and vaporproof for safe operations). Packers can be released, but tripping should not begin before daylight unless prior approval is obtained from the AO.

A cement bond log (CBL) will be run from the production casing shoe to top of the cement and shall be utilized to determine the bond quality for the production casing. Submit a field copy of the CBL to this office.

Whether the well is completed as a dry hole or as a producer, "Well Completion and Recompletion Report and Log" (Form 3160-4) will be submitted not later than 30 days after completion of the well or after completion of operations being performed, in accordance with 43 CFR 3164. Two copies of all logs, core descriptions, core analyses, well-test data, geologic summaries, sample description, and all other surveys or data obtained and compiled during the drilling, workover, and/or completion operations, will be filed with Form 3160-4. Samples (cuttings, fluids, and/or gases) will be submitted when requested by the AO.

6. Notifications of Operations

No location will be constructed or moved, no well will be plugged, and no drilling or workover equipment will be removed from a well to be placed in a suspended status without prior approval of the AO. If operations are to be suspended, prior approval of the AO will be obtained and notification given before resumption of operations.

Operator shall report production data to MMS pursuant to 30 CFR 216.5 using form MMS/3160.

Immediate Report: Spills, blowouts, fires, leaks, accidents, or any other unusual occurrences shall be promptly reported in accordance with the requirements of NTL-3A or its revision.

If a replacement rig is contemplated for completion operations, a "Sundry Notice" (Form 3160-5) to that effect will be filed, for prior approval of the AO, and all conditions of this approved plan are applicable during all operations conducted with the replacement rig.

The date on which production is commenced or resumed will be construed for oil wells as the date on which liquid hydrocarbons are first sold or shipped from a temporary storage facility, such as a test tank, and for which a run ticket is required to be generated or, the date on which liquid hydrocarbons are first produced into a permanent storage facility, whichever first occurs; and, for gas wells as the date on which associated liquid hydrocarbons are first sold or shipped from a temporary storage facility, such as a test tank, and for which a run ticket is required to be generated or, the date on which gas is first measured through permanent metering facilities, whichever first occurs.

Should the well be successfully completed for production, the AO will be notified when the well is placed in a producing status. Such notification will be sent by telegram or other written communication, not later than five (5) days following the date on which the well is placed on production.

Gas produced from this well may not be vented or flared beyond an initial authorized test period of 30 days or 50 MMCF following its completion, whichever occurs first, without the prior written approval of the Authorized Officer. Should gas be vented or flared without approval beyond the authorized test period, the operator may be directed to shut-in the well until the gas can be captured or approval to continue venting or flaring as uneconomic is granted and the operator shall be required to compensate the lessor for that portion of the gas vented or flared without approval which is determined to have been avoidably lost.

A schematic facilities diagram as required by 43 CFR 3162.7-5(d) shall be submitted to the appropriate Field Office within 60 days of installation or first production, whichever occurs first. All site security regulations as specified in Onshore Oil & Gas Order No. 3 shall be adhered to. All product lines entering and leaving hydrocarbon storage tanks will be effectively sealed in accordance with 43 CFR 3162.7-5 (1).

No well abandonment operations will be commenced without the prior approval of the AO. In the case of newly drilled dry holes or failures, and in emergency situations, oral approval will be obtained from the AO. A "Subsequent Report of Abandonment" Form 3160-5, will be filed with the AO within thirty (30) days following completion of the well for abandonment. This report will indicate where plugs were placed and the current status of surface restoration. Final abandonment will not be approved until the surface reclamation work required by the approved APD or approved abandonment notice has been completed to the satisfaction of the AO or his representative, or the appropriate Surface Managing Agency.

7. Other Information

All loading lines will be placed inside the berm surrounding the tank battery.

All off-lease storage, off-lease measurement, or commingling on-lease or off-lease will have prior written approval from the AO.

The oil and gas measurement facilities will be installed on the well location. The oil and gas meters will be calibrated in place prior to any deliveries and tested for meter accuracy at least quarterly thereafter. The AO will be provided with a date and time for the initial meter calibration and all future meter proving schedules. A copy of the meter calibration reports will be submitted to the Vernal Field Office. All meter measurement facilities will conform with Onshore Oil & Gas Order No. 4 for liquid hydrocarbons and Onshore Oil & Gas Order No. 5 for natural gas measurement.

The use of materials under BLM jurisdiction will conform to 43 CFR 3610.2-3.

There will be no deviation from the proposed drilling and/or workover program without prior approval from the AO. Safe drilling and operating practices must be observed. All wells, whether drilling, producing, suspended, or abandoned will be identified in accordance with 43 CFR 3162.

"Sundry Notice and Report on Wells" (Form 3160-5) will be filed for approval for all changes of plans and other operations in accordance with 43 CFR 3162.3-2.

Section 102(b)(3) of the Federal Oil and Gas Royalty Management Act of 1982, as implemented by the applicable provisions of the operating regulations at Title 43 CFR 3162.4-1(c), requires that "not later than the 5th business day after any well begins production on which royalty is due anywhere on a lease site or allocated to a lease site, or resumes production in the case of a well which has been off production for more than 90 days, the operator shall notify the authorized officer by letter or sundry notice, Form 3160-5, or orally to be followed by a letter or sundry notice, of the date on which such production has begun or resumed."

If you fail to comply with this requirement in the manner and time allowed, you shall be liable for a civil penalty of up to \$10,000 per violation for each day such violation continues, not to exceed a maximum of 20 days. See Section 109(c)(3) of the Federal Oil and Gas Royalty Management Act of 1982 and the implementing regulations at Title 43 CFR 3162.4-1(b)(5)(ii).

APD approval is valid for a period of one (1) year from the signature date. An extension period may be granted, if requested, prior to the expiration of the original approval period.

In the event after-hours approvals are necessary, you must contact one of the following individuals:

Ed Forsman (435) 789-7077 (HOME) (435) 646-1685 (PAGER)
Petroleum Engineer

Kirk Fleetwood (435) 789-6858 (HOME) (435) 646-1678 (PAGER)
Petroleum Engineer

Jerry Kenczka (435) 781-1190 (HOME) (435) 646-1676 (PAGER)
Petroleum Engineer

BLM FAX Machine (435) 781-4410

EPA'S LIST OF NONEXEMPT EXPLORATION AND PRODUCTION WASTES

While the following wastes are nonexempt, they are not necessarily hazardous.

Unused fracturing fluids or acids

Gas plant cooling tower cleaning wastes

Painting wastes

Oil and gas service company wastes, such as empty drums, drum rinsate, vacuum truck rinsate, sandblast media, painting wastes, spent solvents, spilled chemicals, and waste acids

Vacuum truck and drum rinsate from trucks and drums, transporting or containing nonexempt waste

Refinery wastes

Liquid and solid wastes generated by crude oil and tank bottom reclaimers

Used equipment lubrication oils

Waste compressor oil, filters, and blowdown

Used hydraulic fluids

Waste solvents

Waste in transportation pipeline-related pits

Caustic or acid cleaners

Boiler cleaning wastes

Boiler refractory bricks

Incinerator ash

Laboratory wastes

Sanitary wastes

Pesticide wastes

Radioactive tracer wastes

Drums, insulation and miscellaneous solids.

CONDITIONS OF APPROVAL
FOR THE SURFACE USE PROGRAM OF THE
APPLICATION FOR PERMIT TO DRILL

- A professional paleontologist will be contacted prior to construction to allow the collection of the fossils on the surface of the ground. The paleontologist will also be contacted to monitor the road and well pad construction.**
- The road shall be crowned at between 2 to 3 %.**
- When plowing snow during the winter months, the snow shall be plowed outside of the borrow ditches to prevent the snow melt from saturating the road during the spring.**
- The dirt contractor shall contact Byron Tolman at the Vernal BLM Field Office 781-4482 to find out where the proposed erosion pond is to be constructed.**

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FOR APPROVED

Budget Bureau No. 1004-0130

Expires September 30, 1990

CONFIDENTIAL

SUNDRY NOTICE AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT --" for such proposals

SUBMIT IN TRIPLICATE

1. Type of Well

☐ Oil WELL ☒ Gas Well ☐ Other

2. Name of Operator

EOG Resources, Inc.

3. Address and Telephone No.

P.O. BOX 250, BIG PINEY, WY 83113 (307) 276-3331

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

**1926' FSL - 611' FEL (NE/SE)
SECTION 6, T28S, R21E**

5. Lease Designation and Serial No.

U 01791

6. If Indian, Allottee or Tribe Name

7. If Unit or C.A., Agreement Designation

NATURAL BUTTES UNIT

8. Well Name and No.

NATURAL BUTTES UNIT 392-6E

9. API Well No.

43-047-33783

10. Field and Pool or Exploratory Area

NATURAL BUTTES/WASATCH

11. County State

UINTAH, UTAH

12. CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

TYPE OF ACTION

☐ NOTICE OF INTENT
☒ SUBSEQUENT REPORT
☐ FINAL ABANDONMENT NOTICE

☐ ABANDONMENT
☐ RECOMPLETION
☐ PLUGGING BACK
☐ CASING REPAIR
☐ ALTERING CASING
☒ OTHER

☐ CHANGE OF PLANS
☐ NEW CONSTRUCTION
☐ NON-ROUTINE FRACTURING
☐ WATER SHUT-OFF
☐ CONVERSION TO INJECTION

SPUD

(Note: Report results of multiple completion on Well Completions
or Recompletion Report and Log Form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details and give pertinent dates, including estimated date of starting any proposed work if well is directionally drilled give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work).

EOG Resources, Inc. spud 12-1/4" surface hole at the subject location 2/26/2001. The contractor was Dall Cook's Air Drilling. Ed Forsman of the Vernal BLM District office and Carol Daniels of the Utah Division of Oil, Gas & Mining were notified of spud 2/26/2001.

RECEIVED

MAR 08 2001

**DIVISION OF
OIL, GAS AND MINING**

*NOTE: EOG Resources, Inc. will be using Nationwide Bond #NM 2308

14. I hereby certify that the foregoing is true and correct

SIGNED Katy Carlson TITLE Regulatory Analyst DATE 3/05/2001

(This space for Federal or State office use)

APPROVED BY

TITLE

DATE

CONDITIONS OF APPROVAL, IF ANY:

CONFIDENTIAL
Expires August 3, 1998

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

WELL COMPLETION OR RECOMPLETION REPORT AND LOG*

1a. TYPE OF WELL: OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> DRY <input type="checkbox"/> OTHER <input type="checkbox"/>						3. LEASE DESIGNATION AND SERIAL NO. U 01791									
b. TYPE OF COMPLETION: NEW WELL <input checked="" type="checkbox"/> WORK OVER <input type="checkbox"/> DEEPEN <input type="checkbox"/> PLUG BACK <input type="checkbox"/> DIFF. RES. <input type="checkbox"/> OTHER <input type="checkbox"/>						6. IF INDIAN, ALLOTTEE OR TRIBE NAME									
2. NAME OF OPERATOR EOG Resources, Inc.						7. UNIT AGREEMENT NAME NATURAL BUTTES UNIT									
3. ADDRESS OF OPERATOR P.O. BOX 250 BIG PINEY, WYOMING 85115						8. FARM OR LEASE NAME NATURAL BUTTES UNIT									
4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements)* At surface 1926' FSL - 611' FEL (NE/SE) At top prod. interval reported below SAME At total depth SAME						9. WELL NO. 392-6E									
15. DATE SPUDDED 2/26/2001						10. FIELD AND POOL, OR WILDCAT NATURAL BUTTES/WASATCH									
16. DATE T.D. REACHED 3/10/2001						11. SEC., T., R., OR BLOCK AND SURVEY SECTION 6, T10S, R21E									
17. DATE COMPL. (Ready to prod.) 3/23/2001						12. COUNTY OR PARISH UINTAH,									
18. ELEVATIONS FOR, RRB, RT, GR, ETC., * 5029' KB						13. STATE UTAH									
19. ELEV. CASINGHEAD 5015' PREP. GL.						14. PERMIT NO. 43-037-33783									
20. TOTAL DEPTH, MD & TVD 6621'						DATE PERMIT ISSUED 12/12/2000									
21. PLUG, BACK T.D., MD & TVD 6596'															
22. IF MULTIPLE COMPLETIONS, HOW MANY? 1						23. ROTARY TOOLS ROTARY									
24. PRODUCING INTERVAL(S), OF THIS COMPLETION-TOP, BOTTOM, NAME (MD AND TVD)* WASATCH 5883' - 6511'						25. WAS DIRECTIONAL SURVEY MADE? NO									
26. TYPE ELECTRIC AND OTHER LOGS RUN Dipole Sonic Imager, Compensated Neutron, Log Quality Control, Dipole Sonic Imager, Compensated Neutron, GR & Cement Bond Log, Collar Locator & GR. 3-92-01						27. WAS WELL CORED? NO									
28. CASING RECORD (Report all strings set in well)															
CASING SIZE		WEIGHT, LB./FT.		DEPTH SET (MD)		HOLE SIZE		CEMENTING RECORD		AMOUNT PULLED					
9-5/8"		36.0# J-55		239'		12-1/4"		125 sx Class "G" cement.		NONE					
4-1/2"		10.5# J-55		6612'		7-7/8"		400 sx Hi-Lift & 500 sx 50/50 Pozmix.		NONE					
29. LINER RECORD												30. TUBING RECORD			
SIZE		TOP (MD)		BOTTOM (MD)		SACKS CEMENT		SCREEN (MD)		SIZE		DEPTH SET (MD)		PACKER SET (MD)	
										2-3/8"		6540'			
31. PERFORATION RECORD (Interval, size and number)												32. ACID, SHOT, FRACTURE, CEMENT, SQUEEZE, ETC.			
Wasatch		B-7 (Bd)		6480-90' & 6509-11'				w/2 SPF		DEPTH INTERVAL (MD)		AMOUNT AND KIND OF MATERIAL USED			
		C-13 (Cj, Ck & Cl)		5970-80', 6037-39' & 6086-89'				w/3 SPF		6480-6511'		15,135 gals gelled water & 63,500# 20/40 sand.			
		C-11 (Ch)		5883-86', 5893-96' & 5906-12'				w/3 SPF		5970-6089'		19,264 gals gelled water & 95,000# 20/40 sand.			
										5883-5912'		No stimulation.			
33.* PRODUCTION															
DATE FIRST PRODUCTION 3/23/2001		PRODUCTION METHOD (Flowing, gas lift, pumping-size and type of pump) FLOWING						WELL STATUS (Producing or shut-in) PRODUCING							
DATE OF TEST 3/25/2001		HOURS TESTED 24		CHOKE SIZE 14/64"		PROD'N FOR 0 BC		OIL-BBL. 782 MCFD		GAS-MCF. 102 BW		WATER-BBL. 102 BW		GAS-OIL RATIO	
FLOW. TUBING PRESS. FTP 1050 psig		CASING PRESSURE CP 1440 psig		CALCULATED		OIL-BBL. 0 BC		GAS-MCF. 782 MCFD		WATER-BBL. 102 BW		OIL GRAVITY-API (CORR.)			
34. DISPOSITION OF GAS (Solid, used for fuel, vented, etc.) SOLD												TEST WITNESSED BY JAY ORR			
35. LIST OF ATTACHMENTS															

36. I hereby certify that the foregoing and attached information is complete and correct as determined from all available records.

SIGNED Dale Carlson TITLE Regulatory Analyst

*(See Instructions and Spaces for Additional Data on Reverse Side)

RECEIVED
DATE 3/27/2001

MAR 30 2001

DIVISION OF
OIL, GAS AND MINING

INSTRUCTIONS

General: This form is designed for submitting a complete and correct well completion report and log on all types of lands and leases to either a Federal agency or a State agency, or both, pursuant to applicable Federal and/or State laws and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local, area, or regional procedures and practices, either are shown below or will be issued by, or may be obtained from, the local Federal and/or State office. See instructions on Items 22 and 24, and 33, below regarding separate reports for separate completions.

Item 4: If there are no applicable State requirements, locations on Federal or Indian land should be described in accordance with Federal requirements. Consult local State or Federal office for specific instructions.

Item 18: Indicate which elevation is used as reference (where not otherwise shown) for depth measurements given in other spaces on this form and in any attachments.

Items 22 and 24: If this well is completed for separate production from more than one interval zone (multiple completion), so state in item 22, and in item 24 show the producing interval, or intervals, top(s), bottom(s) and name(s) (if any) for only the interval reported in item 33. Submit a separate report (page) on this form, adequately identified, for each additional interval to be separately produced, showing the additional data pertinent to such interval.

Item 29: *None*. Attached supplemental records for this well should show the details of any multiple stage cementing and the location of the cementing tool.

Item 33: Submit a separate completion report on this form for each interval to be separately produced. (See instruction for Items 22 and 24 above.)

PRIVACY ACT

The Privacy Act of 1974 and the regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by its application.

AUTHORITY: 30 U.S.C. 181 et. seq., 25 U.S.C. et. seq., 43 CFR 3160

PRINCIPLE PURPOSE: The information is to be used to evaluate the actual operations performed in the drilling of an oil or gas well on a Federal or Indian lease.

ROUTINE USES: (1) Evaluate the equipment and procedures used during the drilling of the well. (2) The review of geologic zones and formation encountered during drilling. (3) Analyze future applications to drill in light of data obtained and methods used. (4)(5) Information from the record and/or the record will be transferred to appropriate Federal, State, local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecutions.

EFFECT OF NOT PROVIDING INFORMATION: Filing of this report and disclosure of the information is mandatory once an oil or gas well is drilled.

The Paperwork Reduction Act of 1980 (44 U.S.C. 3501, et. seq.) requires us to inform you that:

This information is being collected to allow evaluation of the technical, safety, and environmental factors involved with drilling and producing oil and gas on Federal and Indian oil and gas leases.

This information will be used to analyze operations and compare equipment and procedures actually used with the proposals applied for.

Response to this request is mandatory once an oil or gas well is drilled.

SUMMARY OF POROUS ZONES: (Show all important zones of porosity and contents thereof; core intervals; and all annu-stem tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures, and recoveries):

SUMMARY OF POROUS ZONES: (Show all important zones of porosity and contents thereof; core intervals; and all drill-stem tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures, and recoveries):				38. GEOLOGIC MARKERS		
FORMATION	TOP	BOTTOM	DESCRIPTION, CONTENTS, ETC.	TOP		
				NAME	MEAS. DEPTH	TRUE VERT. DEPTH
				Green River	1360'	
				Base "M" Marker	4300'	
				"N" Limestone	4750'	
				Wasatch		
				Peter's Point	4750'	
				P-4	4860'	
				P-6	4990'	
				P-8	5120'	
				Chapita Wells	5490'	
				C-7	5560'	
				C-9	5660'	
				C-11	5800'	
				C-13	5950'	
				Buck Canyon	6142'	
				B-3	6172'	
				B-5	6277'	
				B-7	6427'	

STATE OF UTAH
DIVISION OF OIL, GAS AND MINING

OPERATOR: EOG Resources, Inc.
ADDRESS: P.O. BOX 250
BIG PINEY, WYOMING 83113

OPERATOR ACCT. NO. N 9550
FAX: JIM THOMPSON
(801) 359-3940

ENTITY ACTION FORM - FORM 6

ACTION CODE	CURRENT ENTITY NO.	NEW ENTITY NO.	API NUMBER	WELL NAME	LOCATION				COUNTY	SPUD DATE	EFFECTIVE DATE
					QQ	SEC.	TP	RG			
A	99999	13084 4385	43-047-33826	NORTH CHAPITA 130-5	LOT 3	5	9S	22E	UINTAH	2/12/2001	2-12-01
1 COMMENTS: 4-2-01 CONFIDENTIAL											
A	99999	2900	43-047-33784	NATURAL BUTTES UNIT 484-20E	NW/NW	20	9S	21E	UINTAH	1/10/2001	1-10-01
2 COMMENTS: 1-12-01 CONFIDENTIAL											
A	99999	2900	43-047-33699	NATURAL BUTTES UNIT 424-32E	NW/NW	32	9S	21E	UINTAH	1/3/01	1-3-01
3 COMMENTS: 12-19-00											
B	99999	2900	43-047-33783	NATURAL BUTTES UNIT 392-6E	NE/SE	6	10S	21E	UINTAH	2/26/2001	2-26-01
4 COMMENTS: 4-2-01 CONFIDENTIAL											
B	99999	13085	43-047-33850	NORTH CHAPITA 137-6	LOT 7	6	9S	22E	UINTAH	3/08/2001	3-8-01
5 COMMENTS: 4-2-01 CONFIDENTIAL											


ACTIONS CODES (See instructions on back of form)

- A - Establish new entity for new well (single well only)
- B - Add new well to existing entity (group or unit well)
- C - Re-assign well from one existing entity to another existing entity
- D - Re-assign well from one existing entity to a new entity
- E - Other (explain in comments section)

NOTE: Use COMMENT section to explain why each Action Code was selected.

(3/89)

STATE OF UTAH


Signature
Regulatory Analyst 3/30/2001
Title Date
Phone No. (307) 276-3331

OPERATOR ACCT. NO. N

F-076

P.02/03

3072763335

From EOG - BIG PINEY, WY.

Mar-30-01 03:04pm

(December 1989)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUNDRY NOTICE AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.

Use "APPLICATION FOR PERMIT -" for such proposals

SUBMIT IN TRIPLICATE

FORM APPROVED

Budget Item No. 1004-0135

Expires September 30, 1990

5. Lease Designation and Serial No.

U 01791

6. If Indian, Allottee or Tribe Name

7. If Unit or C.A., Agreement Designation

NATURAL BUTTES UNIT

8. Well Name and No.

NATURAL BUTTES UNIT 392-6E

9. API Well No.

43-047-33783

10. Field and Pool or Exploratory Area

NATURAL BUTTES/WASATCH

11. County State

UINTAH, UTAH

1. Type of Well

☐ Oil WELL ☒ Gas Well ☐ Other

2. Name of Operator

EOG Resources, Inc.

3. Address and Telephone No.

P.O. BOX 250, BIG PINEY, WY 83113 (307) 276-3331

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

1926' FSL - 611' FEL (NE/SE)
SECTION 6, T20S, R21E
105

12. CHECK APPROPRIATE BOX(es) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

TYPE OF ACTION

☒ NOTICE OF INTENT
☐ SUBSEQUENT REPORT
☐ FINAL ABANDONMENT NOTICE☐ ABANDONMENT
☐ RECOMPLETION
☐ PLUGGING BACK
☐ CASING REPAIR
☐ ALTERING CASING
☒ OTHER☐ CHANGE OF PLANS
☐ NEW CONSTRUCTION
☐ NON-ROUTINE FRACTURING
☐ WATER SHUT-OFF
☐ CONVERSION TO INJECTION
☐ DISPOSAL OF PRODUCED WATER(Note: Report results of multiple completion on Well Completions
or Recompletion Report and Log Form.)13. Describe Proposed or Completed Operations (Clearly state all pertinent details and give pertinent dates, including estimated date of starting any proposed work if well
is directionally drilled give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work).EOG Resources, Inc. requests authorization for disposal of produced water from the referenced well to any of the following
locations:

1. Natural Buttes Unit 21-20B SWD
2. Ace Disposal
3. EOG Resources, Inc. drilling operations (Chapita Wells Unit, Natural Buttes Unit & Stagecoach Unit)

Accepted by the
Utah Division of
Oil, Gas and Mining
FOR RECORD ONLY

*NOTE: EOG Resources, Inc. will be using Nationwide Bond #NM 2308

14. I hereby certify that the foregoing is true and correct

SIGNED Dale Carlson TITLE Regulatory Analyst DATE 3/26/2001

(This space for Federal or State office use)

APPROVED BY

TITLE

DATE

CONDITIONS OF APPROVAL, IF ANY:

RECEIVED

MAR 30 2001

DIVISION OF
OIL, GAS AND MININGTitle 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the
United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER _____		5. LEASE DESIGNATION AND SERIAL NUMBER:
2. NAME OF OPERATOR: El Paso Production Oil & Gas Company		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
3. ADDRESS OF OPERATOR: 8 South 1200 East CITY Vernal STATE Utah ZIP 84078		7. UNIT or CA AGREEMENT NAME:
4. LOCATION OF WELL FOOTAGES AT SURFACE: _____ QTR/QR, SECTION, TOWNSHIP, RANGE, MERIDIAN: _____		8. WELL NAME and NUMBER: Exhibit "A" 9. API NUMBER:
PHONE NUMBER: 435-789-4433		10. FIELD AND POOL, OR WILDCAT:

COUNTY:

STATE:

UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

TYPE OF ACTION

<input type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE <input type="checkbox"/> ALTER CASING <input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> DEEPEN <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> PLUG BACK <input type="checkbox"/> PRODUCTION (START/RESUME) <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	<input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> TEMPORARILY ABANDON <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> WATER DISPOSAL <input type="checkbox"/> WATER SHUT-OFF <input checked="" type="checkbox"/> OTHER: <u>Name Change</u>
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____			

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

As a result of the merger between The Coastal Corporation and a wholly owned subsidiary of El Paso Energy Corporation, the name of Coastal Oil & Gas Corporation has been changed to El Paso Production Oil & Gas Company effective March 9, 2001.

See Exhibit "A"

Bond # 400JU0708

Coastal Oil & Gas Corporation

NAME (PLEASE PRINT) John T. Elzner TITLE Vice President

SIGNATURE  DATE 06-15-01

El Paso Production Oil & Gas Company

NAME (PLEASE PRINT) John T. Elzner TITLE Vice President

SIGNATURE  DATE 06-15-01

(This space for State use only)

RECEIVED

JUN 19 2001

DIVISION OF
OIL, GAS AND MINING

(See Instructions on Reverse Side)

State of Delaware
Office of the Secretary of State

PAGE 1

I, HARRIET SMITH WINDSOR, SECRETARY OF STATE OF THE STATE OF DELAWARE, DO HEREBY CERTIFY THE ATTACHED IS A TRUE AND CORRECT COPY OF THE CERTIFICATE OF AMENDMENT OF "COASTAL OIL & GAS CORPORATION", CHANGING ITS NAME FROM "COASTAL OIL & GAS CORPORATION" TO "EL PASO PRODUCTION OIL & GAS COMPANY", FILED IN THIS OFFICE ON THE NINTH DAY OF MARCH, A.D. 2001, AT 11 O'CLOCK A.M.

RECEIVED

JUN 2001

DIVISION OF
OIL, GAS AND MINING



Harriet Smith Windsor
Harriet Smith Windsor, Secretary of State

0610204 8100

010162788

AUTHENTICATION: 1061007

DATE: 04-03-01

CERTIFICATE OF AMENDMENT

OF

CERTIFICATE OF INCORPORATION

COASTAL OIL & GAS CORPORATION (the "Company"), a corporation organized and existing under and by virtue of the General Corporation Law of the State of Delaware, DOES HEREBY CERTIFY:

FIRST: That the Board of Directors of the Company, by the unanimous written consent of its members, filed with the minutes of the Board, adopted a resolution proposing and declaring advisable the following amendment to the Certificate of Incorporation of the Company:

RESOLVED that it is deemed advisable that the Certificate of Incorporation of this Company be amended, and that said Certificate of Incorporation be so amended, by changing the Article thereof numbered "FIRST." so that, as amended, said Article shall be and read as follows:

"FIRST. The name of the corporation is El Paso Production Oil & Gas Company."

SECOND: That in lieu of a meeting and vote of stockholders, the stockholders entitled to vote have given unanimous written consent to said amendment in accordance with the provisions of Section 228 of the General Corporation Law of the State of Delaware.

THIRD: That the aforesaid amendment was duly adopted in accordance with the applicable provisions of Sections 242 and 228 of the General Corporation Law of the State of Delaware.

IN WITNESS WHEREOF, said COASTAL OIL & GAS CORPORATION has caused this certificate to be signed on its behalf by a Vice President and attested by an Assistant Secretary, this 9th day of March 2001.

COASTAL OIL & GAS CORPORATION



David L. Siddall
Vice President

Attest:


(Margaret E. Roark, Assistant Secretary)

RECEIVED

STATE OF DELAWARE
SECRETARY OF STATE
DIVISION OF CORPORATIONS
FILED 11:00 AM 03/09/2001
010118394 - 0610204

JUN 19 2001

DIVISION OF
OIL, GAS AND MINING



United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Utah State Office
P.O. Box 45155
Salt Lake City, UT 84145-0155

RECEIVED

JUL 12 2001

DIVISION OF
OIL, GAS AND MINING

In Reply Refer To:
3106
UTSL-065841
(UT-924)

JUL 10 2001

NOTICE

El Paso Production Oil & Gas Company : Oil and Gas
Nine Greenway Plaza :
Houston TX 77046-0095 :

Name Change Recognized


Acceptable evidence has been received in this office concerning the name change of Coastal Oil & Gas Corporation into El Paso Production Oil & Gas Company with El Paso Production Oil & Gas Company being the surviving entity.

For our purposes, the name change is recognized effective March 9, 2001.

The oil and gas lease files identified on the enclosed exhibit have been noted as to the name change. The exhibit was compiled from a list of leases obtained from our computer program. We have not abstracted the lease files to determine if the entities affected by this name change hold an interest in the leases identified nor have we attempted to identify leases where the entities are the operator on the ground maintaining no vested recorded title or operating rights interests. We will be notifying the Minerals Management Service and all applicable Bureau of Land Management offices of the change by a copy of this notice. If additional documentation for changes of operator are required by our Field Offices, you will be contacted by them.

If you identify additional leases in which the entities maintain an interest, please contact this office and we will appropriately document those files with a copy of this Notice.

Due to the name change, the name of the principal/obligor on the bond is required to be changed from Coastal Oil & Gas Corporation to El Paso Production Oil & Gas Company. You may accomplish this either by consent of surety rider on the original bond or a rider to the original bond. The bonds are held in Wyoming and Colorado.



Opolonia L. Abeyta
Acting Chief, Branch of
Minerals Adjudication

Enclosure

1. Exhibit of Leases (1 pp)

cc: Moab Field Office
Vernal Field Office
MMS, Reference Data Branch, MS3130, PO Box 5860, Denver CO 80217
~~State of Utah, DOGM~~, Attn: Jim Thompson (Ste. 1210), Box 145801, SLC UT 84114
Teresa Thompson (UT-922)
Joe Incardine (UT-921)

Exhibit of Leases

UTUSL-065841A	UTU-47172	UTU-74415	UTU-53860
UTU-28652	UTU-50687	UTU-74416	UTU-66401
UTU-37943	UTU-52298	UTU-75091	UTU-67868
UTU-44089	UTU-0109054	UTU-75096	UTU-65389
UTU-44090A	UTU-0143511	UTU-75097	UTU-77084
UTU-61263	UTU-0143512	UTU-75673	UTU-61430
UTU-00343	UTU-38401	UTU-76259	UTU-72633
UTU-02651	UTU-38411	UTU-76260	UTU-72650
UTU-02651B	UTU-38418	UTU-76261	UTU-49692
UTU-0142175	UTU-38419	UTU-76493	UTU-57894
UTU-70235	UTU-38420	UTU-76495	UTU-76829
UTU-70406	UTU-38421	UTU-76503	UTU-76830
UTU-74954	UTU-38423	UTU-78228	UTU-76831
UTU-75132	UTU-38424	UTU-78714	
UTU-75699	UTU-38425	UTU-78727	
UTU-76242	UTU-38426	UTU-78734	
UTU-78032	UTU-38427	UTU-79012	
UTU-4377	UTU-38428	UTU-79011	
UTU-4378	UTU-53861	UTU-71694	
UTU-7386	UTU-58097	UTU-00576	
UTU-8344A	UTU-64376	UTU-00647	
UTU-8345	UTU-65222	UTU-01470D	
UTU-8347	UTU-65223	UTU-0136484	
UTU-8621	UTU-66746	UTU-8344	
UTU-14646	UTU-67178	UTU-8346	
UTU-15855	UTU-67549	UTU-8648	
UTU-25880	UTU-72028	UTU-28212	
UTU-28213	UTU-72632	UTU-30289	
UTU-29535	UTU-73009	UTU-31260	
UTU-29797	UTU-73010	UTU-33433	
UTU-31736	UTU-73013	UTU-34711	
UTU-34350	UTU-73175	UTU-46699	
UTU-34705	UTU-73434	UTU-78852	
UTU-37116	UTU-73435	UTU-78853	
UTU-37355	UTU-73444	UTU-78854	
UTU-37573	UTU-73450	UTU-075939	
UTU-38261	UTU-73900	UTU-0149767	
UTU-39223	UTU-74409	UTU-2078	
UTU-40729	UTU-74410	UTU-44426	
UTU-40736	UTU-74413	UTU-49530	
UTU-42469	UTU-74414	UTU-51026	

OPERATOR CHANGE WORKSHEET**ROUTING**

1. GLH		4-KAS
2. CDW	✓	5-LP ✓
3. JLT		6-FILE

Enter date after each listed item is completed

Change of Operator (Well Sold)

Designation of Agent

Operator Name Change (Only)

X MergerThe operator of the well(s) listed below has changed, effective: **3-09-2001****FROM: (Old Operator):**COASTAL OIL & GAS CORPORATION
Address: 9 GREENWAY PLAZA STE 2721

HOUSTON, TX 77046-0995

Phone: 1-(713)-418-4635

Account N0230

TO: (New Operator):EL PASO PRODUCTION OIL & GAS COMPANY
Address: 9 GREENWAY PLAZA STE 2721 RM 2975B

HOUSTON, TX 77046-0995

Phone: 1-(832)-676-4721

Account N1845

CA No.**Unit: NATURAL BUTTES****WELL(S)**

NAME	API NO	ENTITY NO	SEC TWN RNG	LEASE TYPE	WELL TYPE	WELL STATUS
NBU 481-3E	43-047-33063	2900	03-09S-21E	FEDERAL	GW	P
NBU 369	43-047-33973	99999	04-09S-21E	FEDERAL	GW	APD
CIGE 255	43-047-33970	99999	07-09S-21E	FEDERAL	GW	APD
NATURAL BUTTES SWD 1-16	43-047-33609	99999	16-09S-21E	FEDERAL	OW	APD
NBU 484-20E	43-047-33784	2900	20-09S-21E	FEDERAL	GW	P
NBU 392-6E	43-047-33783	2900	06-10S-21E	FEDERAL	GW	P
NBU 388	43-047-34240	99999	22-10S-21E	FEDERAL	GW	NEW
NBU 387	43-047-34239	99999	23-10S-21E	FEDERAL	GW	NEW
NBU 323	43-047-34050	99999	30-09S-22E	FEDERAL	OW	APD
NATURAL BUTTES 3-1 SWD	43-047-33610	99999	01-10S-22E	FEDERAL	OW	APD
CIGE 249	43-047-34023	99999	08-10S-22E	FEDERAL	GW	APD
NBU 248	43-047-34079	99999	10-10S-22E	FEDERAL	GW	APD
NBU 386	43-047-34238	99999	17-10S-22E	FEDERAL	GW	NEW
NBU 383	43-047-34236	99999	21-10S-22E	FEDERAL	GW	NEW

OPERATOR CHANGES DOCUMENTATION

1. (R649-8-10) Sundry or legal documentation was received from the **FORMER** operator on: 06/19/2001
2. (R649-8-10) Sundry or legal documentation was received from the **NEW** operator on: 06/19/2001
3. The new company has been checked through the **Department of Commerce, Division of Corporations Database** on: 06/21/2001
4. Is the new operator registered in the State of Utah: YES Business Number: 608186-0143

5. If NO, the operator was contacted contacted on: N/A
6. **Federal and Indian Lease Wells:** The BLM and or the BIA has approved the (merger, name change, or operator change for all wells listed on Federal or Indian leases on: 07/10/2001
7. **Federal and Indian Units:** The BLM or BIA has approved the successor of unit operator for wells listed on: 07/10/2001
8. **Federal and Indian Communization Agreements ("CA"):** The BLM or the BIA has approved the operator change for all wells listed involved in a CA on: N/A
9. **Underground Injection Control ("UIC")** The Division has approved UIC Form 5, **Transfer of Authority to Inject**, for the enhanced/secondary recovery unit/project for the water disposal well(s) listed on: N/A

DATA ENTRY:

1. Changes entered in the **Oil and Gas Database** on: 08/23/2001
2. Changes have been entered on the **Monthly Operator Change Spread Sheet** on: 08/23/2001
3. Bond information entered in RBDMS on: N/A
4. Fee wells attached to bond in RBDMS on: N/A

STATE BOND VERIFICATION:

1. State well(s) covered by Bond No.: N/A

FEDERAL BOND VERIFICATION:

1. Federal well(s) covered by Bond No.: WY 2793

FEE WELLS - BOND VERIFICATION/LEASE INTEREST OWNER NOTIFICATION:

1. (R649-3-1) The **NEW** operator of any fee well(s) listed covered by Bond No: N/A
2. The **FORMER** operator has requested a release of liability from their bond on: N/A
The Division sent response by letter on: N/A
3. (R649-2-10) The **FORMER** operator of the Fee wells has been contacted and informed by a letter from the Division of their responsibility to notify all interest owners of this change on: _____

FILMING:

1. All attachments to this form have been **MICROFILMED** on: _____

FILING:

1. **ORIGINALS/COPIES** of all attachments pertaining to each individual well have been filled in each well file on: _____

COMMENTS: Master list of all wells involved in operator change from Coastal Oil & Gas Corporation to El Paso Production Oil and Gas Company shall be retained in the "Operator Change File".

JAN. 17. 2003 3:34PM

WESTPORT

NO. 173 P. 2

**WESTPORT OIL AND GAS COMPANY, L.P.**

410 Seventeenth Street #2300 Denver Colorado 80202-4436
Telephone: 303 573 5404 Fax: 303 573 5609

February 1, 2002

Department of the Interior
Bureau of Land Management
2850 Youngfield Street
Lakewood, CO 80215-7093
Attention: Ms. Martha Maxwell

RE: BLM Bond CO-1203
BLM Nationwide Bond 158626364
Surety - Continental Casualty Company
Belco Energy Corporation merger into Westport Oil and Gas Company, Inc.
Conversion of Westport Oil and Gas Company, Inc., into Westport Oil and Gas Company, L.P.
Assumption Rider - Westport Oil and Gas Company, L.P.

Dear Ms. Maxwell:

Pursuant to our recent conversations, please find the following list of enclosures for the BLM's consideration and approval:

Two (2) Assumption Riders, fully executed originals.
Copies of Belco Energy Corporation merger into Westport Oil and Gas Company, Inc.
Copies of Westport Oil and Gas Company, Inc., conversion into Westport Oil and Gas Company, L.P.
List of all Federal/BIA/State Leases - Belco/Westport's leases - in all states.

Please inform us of any additional information needed to complete the change to Westport Oil and Gas Company, L.P., as operator of record.

I thank you for your assistance and cooperation in this matter. Please do not hesitate contacting the undersigned, should a question arise.

Sincerely,
Westport Oil and Gas Company, L.P.

Debby J. Black
Debby J. Black
Engineer Technician

Encl:



United States Department of the Interior **RECEIVED**

BUREAU OF LAND MANAGEMENT

Utah State Office
P.O. Box 45155
Salt Lake City, UT 84145-0155

FEB 22 2002

DIVISION OF
OIL, GAS AND MINING

In Reply Refer To:

3106

UTU-25566 et al

(UT-924)

FEB 21 2002

NOTICE

Westport Oil and Gas Company L.P. : Oil and Gas
410 Seventeenth Street, #2300 :
Denver Colorado 80215-7093 :

Name Change Recognized

Acceptable evidence has been received in this office concerning the name change of Westport Oil and Gas Company, Inc. into Westport Oil and Gas Company, L.P. with Westport Oil and Gas Company, L.P. being the surviving entity.


For our purposes, the name change is recognized effective December 31, 2001.

The oil and gas lease files identified have been noted as to the name change. The exhibit was compiled from a list of leases obtained from our computer program. We have not abstracted the lease files to determine if the entities affected by this name change hold an interest in the leases identified nor have we attempted to identify leases where the entities are the operator on the ground maintaining no vested recorded title or operating rights interests. We will be notifying the Minerals Management Service and all applicable Bureau of Land Management offices of the change by a copy of this notice. If additional documentation for changes of operator are required by our Field Offices, you will be contacted by them.

If you identify additional leases in which the entities maintain an interest, please contact this office and we will appropriately document those files with a copy of this Notice.

Due to the name change, the name of the principal/obligor on the bond is required to be changed from Westport Oil and Gas Company, Inc. to Westport Oil and Gas Company, L.P.. You may accomplish this either by consent of surety rider on the original bond or a rider to the original bond. The bonds are held in Colorado.

UTU-03405
UTU-20895
UTU-25566
UTU-43156
UTU-49518
UTU-49519
UTU-49522
UTU-49523



Robert Lopez
Chief, Branch of
Minerals Adjudication

cc: Moab Field Office
Vernal Field Office
MMS, Reference Data Branch, MS3130, PO Box 5860, Denver CO 80217
State of Utah, DOGM, Attn: Jim Thompson (Ste. 1210), Box 145801, SLC UT 84114
Teresa Thompson (UT-922)
Joe Incardine (UT-921)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENTFORM APPROVED
OMB NO. 1004-0135
Expires: November 30, 2000**SUNDRY NOTICES AND REPORTS ON WELLS**
*Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.*5. Lease Serial No.
U 01791

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.
NATURAL BUTTES8. Well Name and No.
NATURAL BUTTES UNIT 392-6E9. API Well No.
43-047-3378310. Field and Pool, or Exploratory
NATURAL BUTTES/WASATCH11. County or Parish, and State
UINTAH COUNTY, UT**SUBMIT IN TRIPLICATE - Other Instructions on reverse side.**

1. Type of Well

☐ Oil Well ☒ Gas Well ☐ Other2. Name of Operator
EOG RESOURCES, INC.Contact: KATY CARLSON
E-Mail: Kathleen_Carlson@EOGResources.com3a. Address
P.O. BOX 250
BIG PINEY, WY 831133b. Phone No. (include area code)
Ph: 307.276.48424. Location of Well (Footage, Sec., T., R., M., or Survey Description)
Sec 6 T10S R21E NESE 1926FSL 611FEL**12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA**

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input checked="" type="checkbox"/> Recomplete	<input type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleation in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

EOG Resources, Inc. continued the Wasatch formation completion as follows:

1. Fracture stimulated existing perfs C-11 (Ch) 5883-5912' w/19,005 gals gelled water & 96,000# 20/40 sand.
2. Perforated C-9 (Cd & Ce) from 5747-51', 5806-10' & 5814-18'.
3. Fracture stimulated w/20,407 gals gelled water & 81,000# 20/40 sand.
4. Perforated C-7 (Cc) from 5638-42', 5650-56' & 5660-62'.
5. Fracture stimulated w/17,991 gals gelled water & 97,000# 20/40 sand.

TEST: 3/24/2002, 70 MCFD, 0 BC, 20 BW in 24 hours on a 16/64" choke, FTP 350 psig, CP 1180 psig.

RECEIVED

MAR 29 2002

DIVISION OF
OIL, GAS AND MINING

14. I hereby certify that the foregoing is true and correct.

**Electronic Submission #10913 verified by the BLM Well Information System
For EOG RESOURCES, INC., will be sent to the Vernal**

Name (Printed/Typed) KATY CARLSON

Title REGULATORY ANALYST

Signature (Electronic Submission)

Date 03/26/2002

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved By

Title

Date

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

**** DRAFT ** DRAFT ** DRAFT ** DRAFT ** DRAFT ** DRAFT ** DRAFT ****

July 2, 2002

Mr. Jim Thompson, Eng Tech
State of Utah
Division of Oil, Gas, and Mining
1594 West North Temple, Suite 1210
PO Box 145801
Salt Lake City, Utah 84114-5801

Re: Well Name Verification

Dear Mr. Thompson


On behalf of El Paso Production Oil and Gas Co I would like to apologize for the well name confusion that has developed over the past few years. Believe me it's not just between the Government agencies and El Paso, we also have had the same problem internally.

Over the years well names get shortened, abbreviated, and in some cases made longer. Unfortunately these revised names become the common name and as you know all information about these wells is reported by the revised name rather than the official name.

Thank you for helping us identify the wells in our system that have gone through this metamorphism. Please find attached a list of these wells. Note that we have divided the wells into three categories: 1) Yellow highlight is used to identify wells that the state needs to change to match El Paso's database. 2) Blue highlight is used to identify wells that El Paso will change to match the state database. 3) Green highlight is used for wells that have an unnecessary extension that both El Paso and the state need to remove.

El Paso now requests that these names be officially changed as described above. We hope this will help avoid any future confusion that may arise trying to identify these wells. If you have any additional questions please do not hesitate to call our regulatory analyst Cheryl Cameron or myself.

Sincerely,


Sam C. Prutch
Engineering Manager

RECEIVED

AUG 05 2002

**DIVISION OF
OIL, GAS AND MINING**

1368 South 1200 East • Vernal, UT 84078
435.781.7037 Phone • 435.781.7095 Fax

memorandum

Branch of Real Estate Services
Uintah & Ouray Agency

Date: 5 December, 2002

Reply to
Attn of: Supervisory Petroleum Engineer

Subject: Modification of Utah Division of Oil, Gas and Mining Regulations

To: Director, Utah Division of Oil, Gas and Mining Division: John Baza

We have been advised of changes occurring with the operation of your database for Change of Operator. You will be modifying your records to reflect Change of Operator once you have received all necessary documentation from the companies involved, and perhaps in advance of our Notice of Concurrence/Approval of Change of Operator where Indian leases are involved.


We have no objection.

With further comment to Rulemaking, I wish to comment concerning the provision of Exhibits for upcoming Hearings. I would like to see the Uintah & Ouray Agency, BIA, and the Ute Indian Tribe, Energy & Mineral Resources Department added to the list of those parties that receive advance Exhibits so as to allow us to have research time prior to Hearing dates. We will be able to provide a more informed recommendation to the Oil, Gas and Mining Board. It would be best if we would receive only those Exhibits that concern Indian lands, specifically on or adjacent to Indian lands. This may be a difficult situation to attain, as it is not always clear where 'on or adjacent' occurs.

I am aware that you have gone to extra effort to correct this matter already, and I fully appreciate it. My request is intended only to allow the addition of Uintah & Ouray Agency and Ute Indian Tribe to the official listing.

We appreciate your concern, and hope that these comments are timely enough for consideration in the revision process.

CC: Minerals & Mining Section of RES
Ute Energy & Mineral Resources Department: Executive Director
chrono





IN REPLY REFER TO:
Real Estate Services

United States Department of the Interior

BUREAU OF INDIAN AFFAIRS

Washington, D.C. 20240

FEB 10 2003

Carroll A. Wilson
Principal Landman
Westport Oil and Gas Company, L.P.
1368 South 1200 East
Vernal, Utah 84078

Dear Mr. Wilson:

This is in response to your request for approval of RLI Insurance Company's Nationwide Oil and Gas Lease Bond No. RLB0005239 executed effective December 17, 2002, (\$150,000 coverage) with Westport Oil and Gas Company, L. P., as principal.

This bond is hereby approved as of the date of this correspondence and will be retained in the Bureau of Indian Affairs' Division of Real Estate Services, 1849 C Street, NW, MS-4512-MIB, Washington, D.C. 20240. All Bureau oil and gas regional offices and the surety are being informed of this action.

In cases where you have existing individual and/or collective bonds on file with one or more of our regional offices, you may now request those offices, directly, to terminate in lieu of coverage under this Nationwide Bond.

Enclosed is a copy of the approved bond for your files. If we may be of further assistance in this matter, please advise.

Sincerely,

A handwritten signature in cursive script, reading "Perry E. Brown", is written over a horizontal line.

Director, Office of Trust Responsibilities

ACTING

Enclosure



United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Utah State Office
P.O. Box 45155
Salt Lake City, UT 84145-0155

IN REPLY REFER TO
UT-922

February 27, 2003

Westport Oil and Gas Company, L.P.
Attn: Gary D. Williamson
1670 Broadway, Suite 2800
Denver, Colorado 80202

Re: Natural Buttes Unit
Uintah County, Utah

Gentlemen:

On February 27, 2003, we received an indenture dated December 17, 2002, whereby El Paso Production Oil & Gas Company resigned as Unit Operator and Westport Oil and Gas Company, L.P., was designated as Successor Unit Operator for the Natural Buttes Unit, Uintah County, Utah.

This indenture was executed by all required parties and the signatory parties have complied with Sections 5 and 6 of the unit agreement. The instrument is hereby approved effective February 27, 2003. In approving this designation, the Authorized Officer neither warrants nor certifies that the designated party has obtained all required approval that would entitle it to conduct operations under the Natural Buttes Unit Agreement.

Your nationwide (Colorado) oil and gas bond No. 1203 will be used to cover all operations within the Natural Buttes Unit.

It is requested that you notify all interested parties of the change in unit operator. Copies of the approved instruments are being distributed to the appropriate federal offices, with one copy returned herewith.

Sincerely,

/s/ Robert A. Henricks

Robert A. Henricks
Chief, Branch of Fluid Minerals

Enclosure

bcc: Field Manager - Vernal (w/enclosure)
SITLA
Division of Oil, Gas & Mining
Minerals Adjudication Group
File - Natural Buttes Unit (w/enclosure)
Agr. Sec. Chron
Fluid Chron

UT922:TAThompson:tt:02/27/2003

RECEIVED

FEB 28 2003

DIV. OF OIL, GAS & MINING

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

5. LEASE DESIGNATION AND SERIAL NUMBER:

6. IF INDIAN, ALLOTTEE OR TRIBE NAME:

7. UNIT or CA AGREEMENT NAME:

8. WELL NAME and NUMBER:
Exhibit "A"

9. API NUMBER:

10. FIELD AND POOL, OR WILDCAT:

1. TYPE OF WELL

OIL WELL ☐

GAS WELL ☐

OTHER _____

2. NAME OF OPERATOR:

El Paso Production Oil & Gas Company

3. ADDRESS OF OPERATOR:

9 Greenway Plaza

CITY:

Houston

STATE:

TX

ZIP:

77064-0995

PHONE NUMBER:

(832) 676-5933

4. LOCATION OF WELL

FOOTAGES AT SURFACE:

COUNTY:

QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:

STATE:

UTAH

11. **CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA**

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input checked="" type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> OTHER: _____
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Operator change to Westport Oil and Gas Company, L.P., 1670 Broadway, Suite 2800, Denver, CO. 80202-4800, effective December 17, 2002.

BOND # _____

State Surety Bond No. RLB0005236
Fee Bond No. RLB0005238

EL PASO PRODUCTION OIL & GAS COMPANY

By: _____

Jon R. Nelsen, Attorney-in-Fact

RECEIVED

FEB 28 2003

DIV. OF OIL, GAS & MINING

WESTPORT OIL AND GAS COMPANY, L.P.

NAME (PLEASE PRINT)

David R. Dix

TITLE

Agent and Attorney-in-Fact

SIGNATURE

David R. Dix

DATE

12/17/02

(This space for State use only)

Form 3160-5
(August 1999)UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUNDRY NOTICES AND REPORTS ON WELLS

*Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.*FORM APPROVED
OMB No. 1004-0135
Expires November 30, 2000

5. Lease Serial No.

SEE ATTACHED EXHIBIT "A"

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.

SEE ATTACHED EXHIBIT "A"

9. API Well No.

SEE ATTACHED EXHIBIT "A"

10. Field and Pool, or Exploratory Area

11. County or Parish, State

UINTAH COUNTY, UT

SUBMIT IN TRIPLICATE - Other instructions on reverse side

1. Type of Well

☐ Oil Well ☒ Gas Well ☐ Other

2. Name of Operator

WESTPORT OIL & GAS COMPANY, L.P.

3a. Address

P.O. BOX 1148 VERNAL, UT 84078

3b. Phone No. (include area code)

(435) 781-7023

4. Location of Well (Easement, Sec., T., R., M., or Survey Description)

SEE ATTACHED EXHIBIT "A"

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	SUCCESSOR OF
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	OPERATOR

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and so forth. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed when testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator determined that the site is ready for final inspection.

WESTPORT OIL & GAS COMPANY, L.P., IS CONSIDERED TO BE THE OPERATOR ON THE ATTACHED DESCRIBED LANDS AND IS RESPONSIBLE UNDER THE TERMS AND CONDITIONS OF THE LEASE FOR THE OPERATIONS CONDUCTED ON THE LEASED LANDS OR PORTIONS THEREOF, BOND COVERAGE FOR THIS WELL IS PROVIDED BY FEDERAL NATIONWIDE BOND NO. 158626364, EFFECTIVE FEBRUARY 1, 2002, AND BIA NATIONWIDE BOND NO. RLB0005239, EFFECTIVE FEBRUARY 10, 2003.

RECEIVED

MAR 04 2003

DIV. OF OIL, GAS & MINING

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed)

CHERYL CAMERON

Title

OPERATIONS

Date

March 4, 2003

Approved by

THIS SPACE FOR FEDERAL OR STATE USE

Title

Date

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on reverse)

OPERATOR CHANGE WORKSHEET

ROUTING

1. GLH
2. CDW ✓
3. FILE

X Change of Operator (Well Sold)

Designation of Agent/Operator

Operator Name Change

Merger

The operator of the well(s) listed below has changed, effective: **12-17-02**

FROM: (Old Operator):	TO: (New Operator):
EL PASO PRODUCTION OIL & GAS COMPANY	WESTPORT OIL & GAS COMPANY LP
Address: 9 GREENWAY PLAZA	Address: P O BOX 1148
HOUSTON, TX 77064-0995	VERNAL, UT 84078
Phone: 1-(832)-676-5933	Phone: 1-(435)-781-7023
Account No. N1845	Account No. N2115

CA No.

Unit: NATURAL BUTTES

WELL(S)

NAME	SEC TWN RNG	API NO	ENTITY NO	LEASE TYPE	WELL TYPE	WELL STATUS
NBU CIGE 38-4-10-21	04-10S-21E	43-047-30495	2900	FEDERAL	GW	P
NBU CIGE 81D-4-10-21	04-10S-21E	43-047-30854	2900	STATE	GW	S
NBU 390-4E	04-10S-21E	43-047-32835	2900	FEDERAL	GW	P
NBU 345-4E	04-10S-21E	43-047-34700	99999	FEDERAL	GW	APD
NBU 29-5B	05-10S-21E	43-047-30368	2900	FEDERAL	GW	P
COG NBU 102	05-10S-21E	43-047-31757	2900	FEDERAL	GW	P
NBU 114	05-10S-21E	43-047-31923	2900	FEDERAL	GW	S
NBU 391-5E	05-10S-21E	43-047-32988	2900	FEDERAL	GW	P
NBU 16-6B	06-10S-21E	43-047-30316	2900	FEDERAL	GW	P
NBU CIGE 30-6-10-21	06-10S-21E	43-047-30498	2900	FEDERAL	GW	P
CIGE 137-6-10-21	06-10S-21E	43-047-31988	2900	FEDERAL	GW	P
NBU 307-6E	06-10S-21E	43-047-32014	2900	FEDERAL	GW	P
CIGE 138-6-10-21	06-10S-21E	43-047-31987	2900	FEDERAL	GW	PA
CIGE 138A-6-10-21	06-10S-21E	43-047-32049	2900	FEDERAL	GW	P
CIGE 159-6-10-21	06-10S-21E	43-047-32120	2900	FEDERAL	GW	S
CIGE 259	06-10S-21E	43-047-34367	2900	FEDERAL	GW	S
CIGE 260	06-10S-21E	43-047-34368	2900	FEDERAL	GW	P
CIGE 392-6E	06-10S-21E	43-047-33783	2900	FEDERAL	GW	S
CIGE 261	07-10S-21E	43-047-34369	2900	FEDERAL	GW	P
CIGE 262	07-10S-21E	43-047-34370	2900	FEDERAL	GW	P

OPERATOR CHANGES DOCUMENTATION

Enter date after each listed item is completed

1. (R649-8-10) Sundry or legal documentation was received from the **FORMER** operator on: 02/28/2003
2. (R649-8-10) Sundry or legal documentation was received from the **NEW** operator on: 03/04/2003
3. The new company has been checked through the **Department of Commerce, Division of Corporations Database** on: 03/06/2003
4. Is the new operator registered in the State of Utah: YES Business Number: 1355743-0181
5. If **NO**, the operator was contacted on: _____

6. (R649-9-2) Waste Management Plan has been received on: IN PLACE

7. **Federal and Indian Lease Wells:** The BLM and or the BIA has approved the merger, name change, or operator change for all wells listed on Federal or Indian leases on: BLM-12/31/2003 BIA-12/5/02

8. **Federal and Indian Units:**

The BLM or BIA has approved the successor of unit operator for wells listed on: 02/27/2003

9. **Federal and Indian Communization Agreements ("CA"):**

The BLM or BIA has approved the operator for all wells listed within a CA on: N/A

10. **Underground Injection Control ("UIC")** The Division has approved UIC Form 5, **Transfer of Authority to Inject**, for the enhanced/secondary recovery unit/project for the water disposal well(s) listed on: N/A

DATA ENTRY:

1. Changes entered in the Oil and Gas Database on: 03/19/2003

2. Changes have been entered on the Monthly Operator Change Spread Sheet on: 03/19/2003

3. Bond information entered in RBDMS on: N/A

4. Fee wells attached to bond in RBDMS on: N/A

STATE WELL(S) BOND VERIFICATION:

1. State well(s) covered by Bond Number: RLB 0005236

FEDERAL WELL(S) BOND VERIFICATION:

1. Federal well(s) covered by Bond Number: 158626364

INDIAN WELL(S) BOND VERIFICATION:

1. Indian well(s) covered by Bond Number: RLB 0005239

FEE WELL(S) BOND VERIFICATION:

1. (R649-3-1) The **NEW** operator of any fee well(s) listed covered by Bond Number RLB 0005238

2. The **FORMER** operator has requested a release of liability from their bond on: N/A

The Division sent response by letter on: N/A

LEASE INTEREST OWNER NOTIFICATION:

3. (R649-2-10) The **FORMER** operator of the fee wells has been contacted and informed by a letter from the Division of their responsibility to notify all interest owners of this change on: N/A

COMMENTS:

Division of Oil, Gas and Mining
OPERATOR CHANGE WORKSHEET

ROUTING

1. DJJ

2. CDW

X Change of Operator (Well Sold)

Operator Name Change/Merger

The operator of the well(s) listed below has changed, effective:

1/6/2006

FROM: (Old Operator):

N2115-Westport Oil & Gas Co., LP
 1368 South 1200 East
 Vernal, UT 84078
 Phone: 1-(435) 781-7024

TO: (New Operator):

N2995-Kerr-McGee Oil & Gas Onshore, LP
 1368 South 1200 East
 Vernal, UT 84078
 Phone: 1-(435) 781-7024

CA No.		Unit:		NATURAL BUTTES UNIT				
WELL NAME	SEC	TWN	RNG	API NO	ENTITY NO	LEASE TYPE	WELL TYPE	WELL STATUS

OPERATOR CHANGES DOCUMENTATION

Enter date after each listed item is completed

- (R649-8-10) Sundry or legal documentation was received from the **FORMER** operator on: 5/10/2006
- (R649-8-10) Sundry or legal documentation was received from the **NEW** operator on: 5/10/2006
- The new company was checked on the **Department of Commerce, Division of Corporations Database** on: 3/7/2006
- a. Is the new operator registered in the State of Utah: YES Business Number: 1355743-0181
- b. If **NO**, the operator was contacted on: _____
- 5a. (R649-9-2)Waste Management Plan has been received on: IN PLACE
- 5b. Inspections of LA PA state/fee well sites complete on: n/a 3 LA wells & all PA wells transferred
- 5c. Reports current for Production/Disposition & Sundries on: ok
- 6. Federal and Indian Lease Wells:** The BLM and or the BIA has approved the merger, name change, or operator change for all wells listed on Federal or Indian leases on: BLM 3/27/2006 BIA not yet
- 7. Federal and Indian Units:**
The BLM or BIA has approved the successor of unit operator for wells listed on: 3/27/2006
- 8. Federal and Indian Communization Agreements ("CA"):**
The BLM or BIA has approved the operator for all wells listed within a CA on: n/a
- 9. Underground Injection Control ("UIC")** The Division has approved UIC Form 5, Transfer of Authority to Inject, for the enhanced/secondary recovery unit/project for the water disposal well(s) listed on: _____

DATA ENTRY:

- Changes entered in the **Oil and Gas Database** on: 5/15/2006
- Changes have been entered on the **Monthly Operator Change Spread Sheet** on: 5/15/2006
- Bond information entered in RBDMS on: 5/15/2006
- Fee/State wells attached to bond in RBDMS on: 5/16/2006
- Injection Projects to new operator in RBDMS on: _____
- Receipt of Acceptance of Drilling Procedures for APD/New on: n/a Name Change Only

BOND VERIFICATION:

- Federal well(s) covered by Bond Number: CO1203
- Indian well(s) covered by Bond Number: RLB0005239
- (R649-3-1) The **NEW** operator of any fee well(s) listed covered by Bond Number RLB0005236
- a. The **FORMER** operator has requested a release of liability from their bond on: n/a rider added KMG
The Division sent response by letter on: _____

LEASE INTEREST OWNER NOTIFICATION:

- (R649-2-10) The **FORMER** operator of the fee wells has been contacted and informed by a letter from the Division of their responsibility to notify all interest owners of this change on: 5/16/2006

COMMENTS:

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0135
Expires November 30, 2000

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE - Other instructions on reverse side

1. Type of Well

☐ Oil Well ☒ Gas Well ☐ Other

2. Name of Operator

KERR-McGEE OIL & GAS ONSHORE LP

3a. Address

1368 SOUTH 1200 EAST VERNAL, UT 84078

3b. Phone No. (include area code)

(435) 781-7024

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

SEE ATTACHED

5. Lease Serial No.

MULTIPLE LEASES

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.

MUTIPLE WELLS

9. API Well No.

10. Field and Pool, or Exploratory Area

11. County or Parish, State

UINTAH COUNTY, UTAH

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

TYPE OF ACTION

☐ Notice of Intent

☒ Subsequent Report

☐ Final Abandonment Notice

☐ Acidize

☐ Alter Casing

☐ Casing Repair

☐ Change Plans

☐ Convert to Injection

☐ Deepen

☐ Fracture Treat

☐ New Construction

☐ Plug and Abandon

☐ Plug Back

☐ Production (Start/Resume)

☐ Reclamation

☐ Recomplete

☐ Temporarily Abandon

☐ Water Disposal

☐ Water Shut-Off

☐ Well Integrity

☒ Other **CHANGE OF OPERATOR**

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

PLEASE BE ADVISED THAT KERR-McGEE OIL & GAS ONSHORE LP, IS CONSIDERED TO BE THE OPERATOR OF THE ATTACHED WELL LOCATIONS. EFFECTIVE JANUARY 6, 2006.

KERR-McGEE OIL & GAS ONSHORE LP, IS RESPONSIBLE UNDER TERMS AND CONDITIONS OF THE LEASE(S) FOR THE OPERATIONS CONDUCTED UPON LEASE LANDS. BOND COVERAGE IS PROVIDED BY STATE OF UTAH NATIONWIDE BOND NO. RLB0005237.

RECEIVED

MAY 10 2006

DIV. OF OIL, GAS & MINING

BLM BOND = C01203

BIA BOND = RLB0005237

APPROVED 5/16/06

Earlene Russell
Division of Oil, Gas and Mining
Earlene Russell, Engineering Technician

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed)

RANDY BAYNE

Title

DRILLING MANAGER

Signature

Date

May 9, 2006

THIS SPACE FOR FEDERAL OR STATE USE

Approved by

Title

Date

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on reverse)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

FORM APPROVED
OMB No. 1004-0135
Expires November 30, 2000

5. Lease Serial No.

MULTIPLE LEASES

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.

MUTIPLE WELLS

9. API Well No.

10. Field and Pool, or Exploratory Area

11. County or Parish, State

UINTAH COUNTY, UTAH

SUBMIT IN TRIPLICATE - Other instructions on reverse side

1. Type of Well

☐ Oil Well ☒ Gas Well ☐ Other

2. Name of Operator

WESTPORT OIL & GAS COMPANY L.P.

3a. Address

1368 SOUTH 1200 EAST VERNAL, UT 84078

3b. Phone No. (include area code)

(435) 781-7024

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

SEE ATTACHED

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other CHANGE OF OPERATOR
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

EFFECTIVE JANUARY 6, 2006, WESTPORT OIL & GAS COMPANY L.P., HAS RELINQUISHED THE OPERATORSHIP OF THE ATTACHED WELL LOCATIONS TO KERR-McGEE OIL & GAS ONSHORE LP.

APPROVED 5/16/06
Earlene Russell
Division of Oil, Gas and Mining
Earlene Russell, Engineering Technician

RECEIVED
MAY 10 2006

DIV OF OIL, GAS & MINING

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed)

BRAD LANEY

Signature

Title

ENGINEERING SPECIALIST

Date

May 9, 2006

THIS SPACE FOR FEDERAL OR STATE USE

Approved by

Brad Laney

Title

Office

Date

5-9-06

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on reverse)



United States Department of the Interior

BUREAU OF LAND MANAGEMENT
Colorado State Office
2850 Youngfield Street
Lakewood, Colorado 80215-7076

IN REPLY REFER TO:

CO922 (MM)
3106
COC017387 et. al.

March 23, 2006

NOTICE

Kerr-McGee Oil & Gas Onshore L.P. :
1999 Broadway, Suite 3700 : Oil & Gas
Denver, CO 80202 :

Merger/Name Change - Recognized

On February 28, 2006 this office received acceptable evidence of the following mergers and name conversion:

Kerr-McGee Oil & Gas Onshore L.P., a Delaware Limited Partnership, and Kerr-McGee Oil & Gas Onshore LLC, a Delaware Limited Partnership merger with and into Westport Oil and Gas Company L.P., a Delaware Limited Partnership, and subsequent Westport Oil & Gas Company L.P. name conversion to Kerr-McGee Oil & Gas Onshore L.P.

For our purposes the merger and name conversion was effective January 4, 2006, the date the Secretary of State of Delaware authenticated the mergers and name conversion.

Kerr-McGee Oil & Gas Onshore L.P. provided a list of oil and gas leases held by the merging parties with the request that the Bureau of Land Management change all their lease records from the named entities to the new entity, Kerr-McGee Oil & Gas Onshore L.P. In response to this request each state is asked to retrieve their own list of leases in the names of these entities from the Bureau of Land Management's (BLM) automated LR2000 data base.

The oil and gas lease files identified on the list provided by Kerr-McGee Oil & Gas Onshore L.P. have been updated as to the merger and name conversion. We have not abstracted the lease files to determine if the entities affected by the acceptance of these documents holds an interest in the lease, nor have we attempt to identify leases where the entity is the operator on the ground that maintains vested record title or operating rights interests. If additional documentation, for change of operator, is required you will be contacted directly by the appropriate Field Office. The Mineral Management Services (MMS) and other applicable BLM offices were notified of the merger with a copy of this notice

Please contact this office if you identify additional leases where the merging party maintains an interest, under our jurisdiction, and we will document the case files with a copy of this notice. If the leases are under the jurisdiction of another State Office that information will be forwarded to them for their action.

Three riders accompanied the merger/name conversion documents which will add Kerr-McGee Oil and Gas Onshore LLC as a principal to the 3 Kerr-McGee bonds maintained by the Wyoming State Office. These riders will be forward to them for their acceptance.

The Nationwide Oil & Gas Continental Casualty Company Bond #158626364 (BLM Bond #CO1203), maintained by the Colorado State Office, will remain in full force and effect until an assumption rider is accepted by the Wyoming State Office that conditions their Nationwide Safeco bond to accept all outstanding liability on the oil and gas leases attached to the Colorado bond.

If you have questions about this action you may call me at 303.239.3768.

/s/Martha L. Maxwell
Martha L. Maxwell
Land Law Examiner
Fluid Minerals Adjudication

Attachment:

List of OG Leases to each of the following offices:

MMS MRM, MS 357B-1

WY, UT, NM/OK/TX, MT/ND, WY State Offices

CO Field Offices

Wyoming State Office

Rider #1 to Bond WY2357

Rider #2 to Bond WY1865

Rider #3 to Bond WY1127



United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Utah State Office
P.O. Box 45155
Salt Lake City, UT 84145-0155
<http://www.blm.gov>



IN REPLY REFER TO:
3106
(UT-922)

March 27, 2006

Memorandum

To: Vernal Field Office

From: Chief, Branch of Fluid Minerals

Subject: Merger Approval

Attached is an approved copy of the merger recognized by the Bureau of Land Management, Colorado State Office. We have updated our records to reflect the merger from Westport Oil and Gas Company L.P. into Kerr-McGee Onshore Oil and Gas Company. The merger was approved effective January 4, 2006.

Chief, Branch of
Fluid Minerals

Enclosure

Approval letter from BLM COSO (2 pp)

cc: MMS, Reference Data Branch, James Sykes, PO Box 25165, Denver CO 80225
State of Utah, DOGM, Attn: Earlene Russell, PO Box 145801, SLC UT 84114
Teresa Thompson
Joe Incardine
Connie Seare
Dave Mascarenas
Susan Bauman

RECEIVED

MAR 28 2006

DIV. OF OIL, GAS & MINERALS

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0137
Expires: July 31, 2010

SUNDRY NOTICES AND REPORTS ON WELLS
**Do not use this form for proposals to drill or to re-enter an
abandoned well. Use Form 3160-3 (APD) for such proposals.**

5. Lease Serial No.
Multiple Leases

6. If Indian, Allottee or Tribe Name

SUBMIT IN TRIPLICATE – Other instructions on page 2.

1. Type of Well

☐ Oil Well ☒ Gas Well ☐ Other

2. Name of Operator
EOG Resources, Inc

3a. Address
1060 EAST HIGHWAY 40, VERNAL, UT 84078

3b. Phone No. (include area code)
435-781-9145

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
See Attached

7. If Unit of CA/Agreement, Name and/or No.
Natural Buttes

8. Well Name and No.
Multiple Wells

9. API Well No.
See Attached

10. Field and Pool or Exploratory Area
Natural Buttes

11. Country or Parish, State
Utah, Utah

12. CHECK THE APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other <u>Change of Operator</u>
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation: Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has determined that the site is ready for final inspection.)

EOG Resources, Inc. has assigned all of its right, title and interest in the wells described in the attached list ("the Subject Wells") to Kerr-McGee Oil & Gas Onshore LP and will relinquish and transfer operatorship of all of the Subject Wells to Kerr-McGee Oil & Gas Onshore LP on January 1, 2010.

As of January 1, 2010, Kerr-McGee Oil & Gas Onshore LP will be considered to be the operator of each of the Subject Wells and will be responsible under the terms and conditions of the applicable lease for the operations conducted upon the leased lands. Bond coverage is provided under Kerr-McGee Oil & Gas Onshore LP's Nationwide BLM Bond No. WYB-000291.

Kerr-McGee Oil & Gas Onshore LP
1099 18th Street, Suite 1800
Denver, CO 80202-1918

By: Michael A. Nixon Date: 12/17/2009

Michael A. Nixon
Agent and Attorney-in-Fact

Accepted by the
Utah Division of
Oil, Gas and Mining
For Record Only *ER*
1/31/2010

14. I hereby certify that the foregoing is true and correct.

Name (Printed/Typed)
J. Michael Schween

Title Agent and Attorney-in-Fact

Signature

Date 12/17/2009

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

RECEIVED

Approved by

Title

Date

DEC 24 2009

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

DIV. OF OIL, GAS & MINING

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

Lease #	API #	Well Name	Footages	Legal Description
UTUO2270A	4304730261	NBU 1-07B	1975' FNL 1850' FWL	T10S-R21E-07-SESW
UTUO144868	4304730262	NBU 2-15B	1630' FSL 2125' FEL	T09S-R20E-15-NWSE
ML22651	4304730267	NBU 3-02B	1819' FNL 716' FWL	T10S-R22E-02-SWNW
UTUO10954A	4304730273	NBU 4-35B	2037' FNL 2539' FWL	T09S-R22E-35-SESW
ML22650	4304730272	NBU 5-36B	1023' FNL 958' FWL	T09S-R22E-36-NWNW
UTUO1791	4304730278	NBU 7-09B	330' FSL 1600' FWL	T10S-R21E-09-SESW
UTUO1207 ST	4304730274	NBU 10-29B	1100' FSL 1540' FEL	T09S-R22E-29-SWSE
UTUO1791	4304730294	NBU 13-08B	1600' FSL 1300' FEL	T10S-R21E-08-NESE
UTUO581	4304730296	NBU 15-29B	821' FNL 687' FWL	T09S-R21E-29-NWNW
UTUO1791	4304730316	NBU 16-06B	330' FSL 900' FEL	T10S-R21E-06-SESE
UTUO2270A	4304730317	NBU 17-18B	1014' FSL 2067' FEL	T10S-R21E-18-SWSE
UTUO144869	4304730328	NBU 19-21B	2015' FNL 646' FEL	T09S-R20E-21-SENE
UTUO575	4304730363	NBU 25-20B	1905' FNL 627' FWL	T09S-R21E-20-SWNW
UTU4485	4304730364	NBU 26-13B	600' FSL 661' FEL	T10S-R20E-13-SESE
UTUO1393B	4304730367	NBU 28-04B	529' FNL 2145' FWL	T10S-R21E-04-NENW
UTUO1393B	4304730368	NBU 29-05B	398' FSL 888' FWL	T10S-R21E-05-SESE
UTUO575	4304730380	NBU 30-18B	1895' FSL 685' FEL	T09S-R21E-18-NESE
ML01197A	4304730385	NBU 31-12B	565' FNL 756' FWL	T10S-R22E-12-NWNW
UTU461	4304730396	NBU 33-17B	683' FSL 739' FWL	T09S-R22E-17-SWSW
UTUO575	4304730404	NBU 34-17B	210' FNL 710' FEL	T09S-R21E-17-NENE
UTUO149767	4304730397	NBU 35-08B	1830' FNL 660' FWL	T09S-R21E-8-SWNW
UTUO144878B	4304730470	NBU 49-12B	551' FSL 1901' FEL	T09S-R20E-12-SWSE
UTUO140225	4304730473	NBU 52-01B	659' FSL 658' FEL	T09S-R21E-01-SESE
UTUO141315	4304730474	NBU 53-03B	495' FSL 601' FWL	T09S-R21E-03-SWSW
ML21510	4304730475	NBU 54-02B	660' FSL 660' FWL	T09S-R21E-02-SWSW
UTUO1193	4304730464	NBU 57-12B	676' FSL 1976' FEL	T09S-R21E-12-SWSE
UTUO1198B	4304730463	NBU 58-23B	1634' FNL 2366' FEL	T10S-R22E-23-SWNE
UTUO37167	4304730477	NBU 62-35B	760' FNL 2252' FEL	T10S-R22E-35-NWNE
UTU10186	4304730466	NBU 63-12B	1364' FNL 1358' FEL	T10S-R20E-12-SWNE
UTUO37167	4304730577	NBU 70-34B	1859' FSL 2249' FWL	T10S-R22E-34-NESW
UTU4476	4304730578	NBU 71-26B	1877' FNL 528' FEL	T10S-R20E-26-SENE
UTUO141315	4304731150	NBU 202-03	898' FSL 1580' FEL	T09S-R21E-03-SWSE
UTUO1791	4304731238	NBU 205-08	1432' FSL 1267' FWL	T10S-R21E-08-NWSW
UTUO1791	4304731165	NBU 206-09	1789' FNL 1546' FWL	T10S-R21E-09-SESW
UTUO1393B	4304731177	NBU 207-04	1366' FSL 1445' FWL	T10S-R21E-04-NESW
UTUO149076	4304731153	NBU 210-24	1000' FSL 1000' FWL	T09S-R21E-24-SWSW
UTUO284	4304731156	NBU 211-20	916' FSL 822' FEL	T09S-R22E-20-SESE
UTUO284	4304731267	NBU 212-19	289' FSL 798' FWL	T09S-R22E-19-SWSW
UTU22650	4304731268	NBU 213-36J	597' FNL 659' FEL	T09S-R22E-36-NENE
ML22651	4304731282	NBU 217-02	2045' FSL 766' FWL	T10S-R22E-02-NWSW
UTUO2270A	4304731310	NBU 218-17	2600' FNL 1500' FWL	T10S-R21E-17-SESW
UTUO149076	4304731308	NBU 219-24	1300' FNL 500' FWL	T09S-R21E-24-NWNW
UTUO149076	4304732131	NBU 301-24E	700' FSL 2450' FEL	T09S-R21E-24-SWSE
UTUO1791	4304732010	NBU 302-09E	1899' FSL 912' FWL	T10S-R21E-09-NWSW
UTUO575	4304732130	NBU 304-18E	782' FSL 1783' FEL	T09S-R21E-18-SWSE
UTUO149767	4304732135	NBU 305-07E	670' FNL 1950' FWL	T09S-R21E-07-NENW
UTUO581	4304732282	NBU 306-18E	1604' FSL 2797' FWL	T09S-R21E-18-NESW
UTUO1791	4304732014	NBU 307-06E	1979' FSL 2000' FEL	T10S-R21E-06-NWSE
UTUO284	4304732202	NBU 308-20E	1503' FSL 954' FWL	T09S-R22E-20-NWSW
UTUO575	4304732283	NBU 309-20E	930' FNL 667' FEL	T09S-R21E-20-NENE
UTUO149075	4304732203	NBU 311-23E	1101' FSL 1978' FEL	T09S-R21E-23-SWSE
UTUO581	4304732378	NBU 313-29E	1000' FNL 660' FEL	T09S-R21E-29-NENE
UTUO141315	4304732271	NBU 314-03E	1045' FSL 2584' FWL	T09S-R21E-03-SESW
UTUO575	4304732381	NBU 316-17E	1935' FNL 1067' FWL	T09S-R21E-17-SWNW
UTUO144868B	4304732362	NBU 317-12E	867' FNL 701' FEL	T09S-R20E-12-NENE
UTUO2270A	4304737511	NBU 319-17E	807' FNL 990' FWL	T10S-R21E-17-NWNW
UTUO1188	4304732379	NBU 321-10E	940' FSL 2508' FWL	T09S-R21E-10-SESW
UTUO575B	4304732376	NBU 325-08E	832' FSL 669' FWL	T09S-R21E-08-SWSW
UTUO1393B	4304733697	NBU 326-04E	1906' FNL 695' FWL	T10S-R21E-04-SWNW
UTUO1393B	4304739303	NBU 327-05E	1117' FNL 942' FEL	T10S-R21E-05-NENE (LOT 1)
UTU4485	4304732386	NBU 328-13E	1766' FSL 1944' FWL	T10S-R20E-13-NESW
UTUO1207 ST	4304732229	NBU 329-29E	2490' FNL 949' FEL	T09S-R22E-29-SENE

RECEIVED

DEC 24 2009

DIV. OF OIL, GAS & MINING

Lease #	API #	Well Name	Footages	Legal Description
UTUO10954A	4304732147	NBU 331-35E	1531' FNL 1153' FEL	T09S-R22E-35-SENE
UTUO1791	4304732148	NBU 332-08E	955' FSL 2508' FEL	T10S-R21E-08-SWSE
ML21510	4304732518	NBU 333-02E	1951' FSL 2245' FWL	T09S-R21E-02-NESW
UTUO149075	4304732265	NBU 335-23E	1419' FNL 828' FEL	T09S-R21E-23-SENE
UTUO149076	4304732264	NBU 336-24E	2024' FNL 1958' FWL	T09S-R21E-24-SENE
UTUO284	4304732281	NBU 339-19E	1890' FSL 674' FWL	T09S-R22E-19-NWSW
UTUO284B	4304732327	NBU 340-20E	1326' FSL 2569' FEL	T09S-R22E-20-NWSE
UTUO1207 ST	4304733055	NBU 341-29E	307' FSL 898' FEL	T09S-R22E-29-SESE
UTUO10954A	4304732212	NBU 342-35E	918' FNL 2563' FEL	T09S-R22E-35-NWNE
UTUO1393B	4304739338	NBU 346-05E	2233' FSL 676' FEL	T10S-R21E-05-NESE
UTUO575B	4304732326	NBU 349-07E	1641' FNL 1036' FWL	T09S-R21E-07-SWNW
UTUO1188	4304732519	NBU 352-10E	1806' FSL 842' FWL	T09S-R21E-10-NWSW
UTUO581	4304732383	NBU 356-29E	1600' FNL 1980' FEL	T09S-R21E-29-SWNE
UTUO2270A	4304732388	NBU 358-01E	736' FSL 1941' FEL	T10S-R20E-01-SWSE
UTU4485	4304750032	NBU 359-13E	661' FSL 2149' FEL	T10S-R20E-13-SWSE
UTU4485	4304732387	NBU 360-13E	1998' FSL 775' FWL	T10S-R20E-13-NWSW
ML21510	4304733782	NBU 379-02E	1967' FSL 898' FWL	T09S-R21E-02-NWSW
UTUO575	4304733064	NBU 382-18E	2030' FSL 2172' FEL	T09S-R21E-18-NWSE
UTUO149075	4304735889	NBU 384-23E	491' FSL 929' FEL	T09S-R21E-23-SESE
UTUO149076	4304733056	NBU 386-24E	450' FSL 1850' FWL	T09S-R21E-24-SESW
UTUO284	4304733057	NBU 388-19E	382' FSL 1847' FWL	T09S-R22E-19-SESW
UTUO1207 ST	4304733049	NBU 389-29E	2226' FSL 2166' FEL	T09S-R22E-29-NWSE
UTUO1393B	4304732835	NBU 390-04E	2577' FSL 1951' FWL	T10S-R21E-04-NESW
UTUO1393B	4304732988	NBU 391-05E	1215' FSL 2090' FEL	T10S-R21E-05-SWSE
UTUO1791	4304733783	NBU 392-06E	1926' FSL 611' FEL	T10S-R21E-06-NESE
UTU4485	4304733071	NBU 393-13E	1850' FSL 2141' FEL	T10S-R20E-13-NWSE
UTU4485	4304733072	NBU 394-13E	725' FSL 2027' FWL	T10S-R20E-13-SESW
UTUO1188	4304732544	NBU 400-11E	1983' FSL 1321' FWL	T09S-R21E-11-NESW
UTUO581	4304734216	NBU 421-29E	1985' FNL 972' FEL	T09S-R21E-29-SENE
UTUO581	4304733698	NBU 422-29E	1980' FNL 785' FWL	T09S-R21E-29-SWNW
UTUO581	4304734206	NBU 423-30E	1980' FSL 660' FEL	T09S-R21E-30-NESE
ML3142	4304733699	NBU 424-32E	744' FNL 773' FEL	T09S-R21E-32-NENE
UTUO2270A	4304740049	NBU 428-07E	660' FSL 855' FWL	T10S-R21E-07-SWSW (Lot 4)
UTUO1791	4304733069	NBU 431-09E	2599' FNL 662' FWL	T10S-R21E-09-SWNW
UTUO2270A	4304738536	NBU 434-17E	1799' FNL 2176' FWL	T10S-R21E-17-SENE
UTUO2270A	4304738376	NBU 435-17E	1837' FNL 571' FWL	T10S-R21E-17-SWNW
UTUO2270A	4304734195	NBU 436-18E	1644' FSL 748' FEL	T10S-R21E-18-NESE
UTUO2270A	4304735499	NBU 437-18E	322' FSL 748' FEL	T10S-R21E-18-SESE
ML22792	4304737534	NBU 438-19E	661' FNL 1941' FEL	T10S-R21E-19-NWNE
ML22792	4304737535	NBU 439-19E	2111' FNL 1980' FWL	T10S-R21E-19-SWNE
UTUO10953	4304736279	NBU 451-01E	1965' FSL 2132' FWL	T10S-R22E-01-NESW
ML22651	4304736053	NBU 456-02E	493' FNL 1080' FWL	T10S-R22E-02-NWNW (Lot 4)
UTUO141315	4304733063	NBU 481-03E	1490' FSL 556' FEL	T09S-R21E-03-NESE
UTUO581	4304733065	NBU 483-19E	1850' FSL 1980' FWL	T09S-R21E-19-NESW
UTUO575	4304733784	NBU 484-20E	350' FNL 823' FWL	T09S-R21E-20-NWNW
UTUO2270A	4304739897	NBU 486-07E	1895' FSL 1834' FWL	T10S-R21E-07-NESW
UTUO575B	4304733121	NBU 489-07E	763' FSL 733' FWL	T09S-R21E-07-SWSW (Lot 4)
UTUO2270A	4304733123	NBU 497-01E	2091' FSL 894' FEL	T10S-R20E-01-NESE
UTUO577A	4304733140	NBU 506-23E	720' FNL 1818' FWL	T09S-R20E-23-NENW
UTUO1791	4304733124	NBU 508-08E	915' FSL 355' FEL	T10S-R21E-08-SESE
UTUO1197A ST	4304739283	NBU 513-12EX	1850' FNL 2133' FWL	T10S-R22E-12-SENE
UTUO2270A	4304733696	NBU 516-12E	1950' FSL 1786' FEL	T10S-R20E-12-NWSE
UTUO141315	4304733779	NBU 519-03E	1749' FSL 798' FWL	T09S-R21E-03-NWSW
UTUO575B	4304733780	NBU 521-08E	2250' FSL 900' FWL	T09S-R21E-08-NWSW
UTUO1188	4304733781	NBU 522-10E	732' FSL 841' FEL	T09S-R21E-10-SESE
UTUO2270A	4304733685	NBU 523-12E	660' FSL 660' FEL	T10S-R20E-12-SESE
UTUO2270A	4304733701	NBU 524-12E	841' FSL 1795' FEL	T10S-R20E-12-SWSE
UTUO2270A	4304739722	NBU 529-07E	704' FNL 762' FWL	T10S-R21E-07-NWNW
UTUO581	4304734639	NBU 534-18E	1885' FSL 115' FWL	T09S-R21E-18-NWSW
UTUO2270A	4304735200	NBU 535-17E	1893' FSL 580' FWL	T10S-R21E-17-NWSW
ML22791	4304735252	NBU 536-18E	734' FSL 2293' FWL	T10S-R21E-18-SESW
UTUO2270A	4304735253	NBU 537-18E	1880' FSL 1830' FEL	T10S-R21E-18-NWSE

RECEIVED

DEC 24 2009

Lease #	API #	Well Name	Footages	Legal Description
UTUO284	4304735886	NBU 538-19E	1937' FSL 1833' FWL	T09S-R22E-19-NESW
UTUO149076	4304735887	NBU 539-24E	1870' FSL 477' FEL	T09S-R21E-24-NESE
UTUO10953	4304736280	NBU 546-01E	2036' FSL 699' FWL	T10S-R22E-01-NWSW
UTUO10953	4304736278	NBU 547-01E	749' FSL 598' FWL	T10S-R22E-01-SWSW
UTU474	4304737687	NBU 553-28E	767' FNL 753' FWL	T10S-R22E-28-NWNW
UTU474	4304737686	NBU 554-28E	2023' FNL 465' FWL	T10S-R22E-28-SWNW
ML22791	4304737685	NBU 555-18E	1984' FSL 1790' FWL	T10S-R21E-18-NESW
ML22791	4304737514	NBU 556-18E	1800' FSL 870' FWL	T10S-R21E-18-NWSW
ML22791	4304737513	NBU 557-18E	852' FSL 661' FWL	T10S-R21E-18-SWSW
UTUO2270A	4304737510	NBU 558-17E	748' FSL 611' FWL	T10S-R21E-17-SWSW
UTUO2278C	4304737509	NBU 559-17E	467' FSL 2065' FWL	T10S-R21E-17-SESW
UTUO2278	4304737508	NBU 560-17E	1946' FSL 1896' FWL	T10S-R21E-17-NESW
UTUO2278	4304737512	NBU 561-17E	857' FSL 1988' FEL	T10S-R21E-17-SWSE
ML22792	4304737536	NBU 562-19E	859' FNL 859' FEL	T10S-R21E-19-NENE
ML22792	4304737537	NBU 563-19E	1982' FSL 1878' FEL	T10S-R21E-19-NWSE
UTU4476	4304738962	NBU 564-26E	665' FNL 1945' FWL	T10S-R20E-26-NENW
ML22793	4304737533	NBU 565-30E	1865' FNL 1786' FEL	T10S-R21E-30-SWNE
UTUO2270A	4304738375	NBU 566-17E	538' FNL 1806' FWL	T10S-R21E-17-NENW
UTUO1791	4304738535	NBU 567-17E	690' FNL 1988' FEL	T10S-R21E-17-NWNE
UTUO1791	4304738537	NBU 568-17E	850' FNL 807' FEL	T10S-R21E-17-NENE
UTUO1791	4304738534	NBU 569-17E	2009' FNL 1809' FEL	T10S-R21E-17-SWNE
UTUO1791	4304738529	NBU 570-17E	2031' FNL 672' FEL	T10S-R21E-17-SENE
UTUO2278	4304738377	NBU 571-17E	1964' FSL 1831' FEL	T10S-R21E-17-NWSE
UTUO2278	4304738374	NBU 572-17E	1810' FSL 739' FEL	T10S-R21E-17-NESE
UTUO2278	4304738510	NBU 573-17E	813' FSL 481' FEL	T10S-R21E-17-SESE
ML22650	4304739308	NBU 602-36E	1723' FNL 719' FWL	T09S-R22E-36-SWNW
UTUO1393B	4304739305	NBU 614-05E	716' FNL 1967' FEL	T10S-R21E-05-NWNE
UTUO1393B	4304739655	NBU 615-05E	2384' FNL 1015' FEL	T10S-R21E-05-SENE
UTUO1393B	4304739337	NBU 617-04E	933' FNL 745' FWL	T10S-R21E-04-NWNW
UTUO1393B	4304739336	NBU 618-04E	998' FSL 661' FWL	T10S-R21E-04-SWSW
UTUO1393B	4304739414	NBU 625-04E	1937' FNL 1722' FWL	T10S-R21E-04-SENW
UO01197A ST	4304739192	NBU 632-12E	860' FNL 2032' FWL	T10S-R22E-12-NENW
UO01197A ST	4304739193	NBU 633-12E	789' FNL 2179' FEL	T10S-R22E-12-NWNE
UO01197A ST	4304739190	NBU 635-12E	1808' FNL 1754' FEL	T10S-R22E-12-SWNE
UTUO1197A ST	4304739191	NBU 636-12E	1824' FNL 461' FEL	T10S-R22E-12-SENE
UTUO8512 ST	4304750016	NBU 638-13E	1926' FNL 2504' FWL	T10S-R22E-13-SENW
UTUO8512 ST	4304750019	NBU 639-13E	859' FNL 1902' FEL	T10S-R22E-13-NWNE
UTUO8512 ST	4304750014	NBU 640-13E	1619' FNL 1639' FEL	T10S-R22E-13-SWNE
UTUO8512A ST	4304750058	NBU 641-13E	990' FNL 1184' FEL	T10S-R22E-13-NENE
UTUO8512 ST	4304750013	NBU 642-13E	1949' FNL 858' FEL	T10S-R22E-13-SENE
UTUO2270A	4304739957	NBU 653-07E	660' FNL 1980' FWL	T10S-R21E-07-NENW
UTUO2270A	4304739956	NBU 654-07E	1913' FNL 522' FWL	T10S-R21E-07-SWNW
UTUO2270A	4304739860	NBU 655-07E	1926' FSL 750' FWL	T10S-R21E-07-NWSW
UTUO1791	4304739856	NBU 658-01E	2177' FNL 1784' FEL	T10S-R20E-01-SWNE
UTUO2270A	4304739858	NBU 660-12E	661' FNL 691' FEL	T10S-R20E-12-NENE
ML22790	4304750011	NBU 661-24E	1734' FSL 661' FWL	T10S-R20E-24-NWSW
ML22790	4304750017	NBU 662-24E	809' FSL 807' FWL	T10S-R20E-24-SWSW
ML22790	4304750010	NBU 663-24E	810' FSL 1979' FWL	T10S-R20E-24-SESW
ML22790	4304739867	NBU 664-24E	1810' FNL 1781' FEL	T10S-R20E-24-NWSE
ML22790	4304750018	NBU 665-24E	1950' FSL 660' FEL	T10S-R20E-24-NESE
ML22790	4304750057	NBU 666-24E	1043' FSL 1722' FEL	T10S-R20E-24-SWSE
ML22790	4304750012	NBU 667-24E	660' FSL 660' FEL	T10S-R20E-24-SESE
UTUO2270A	4304739901	NBU 668-12E	859' FNL 1915' FEL	T10S-R20E-12-NWNE
UO1207 ST	4304740084	NBU 670-29E	2018' FSL 859' FEL	T09S-R22E-29-NESE
UO1207 ST	4304750027	NBU 691-29E	680' FNL 797' FEL	T09S-R22E-29-NENE
ML3140.5	4304738330	NBU 760-36E	1320' FNL 1320' FEL	T09S-R20E-36-NENE
UTU4476	4304738632	NBU 762-26E	1506' FNL 1449' FEL	T10S-R20E-26-SWNE
ML22792	4304738332	NBU 763-19E	1258' FSL 1388' FEL	T10S-R21E-19-SWSE
ML3142	4304738331	NBU 764-32E	875' FNL 667' FWL	T09S-R21E-32-NWNW
UTUO1791	4304738633	NBU 765-09E	1000' FSL 1640' FWL	T10S-R21E-09-SESW

RECEIVED

DEC 24 2009

DIV. OF OIL, GAS & MINING

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		FORM 9
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		5. LEASE DESIGNATION AND SERIAL NUMBER: U-01791
1. TYPE OF WELL Gas Well		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
2. NAME OF OPERATOR: KERR-MCGEE OIL & GAS ONSHORE, L.P.		7. UNIT or CA AGREEMENT NAME: NATURAL BUTTES
3. ADDRESS OF OPERATOR: P.O. Box 173779 1099 18th Street, Suite 600, Denver, CO, 80217 3779		8. WELL NAME and NUMBER: NBU 392-6E
4. LOCATION OF WELL FOOTAGES AT SURFACE: 1926 FSL 0611 FEL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: NESE Section: 06 Township: 10.0S Range: 21.0E Meridian: S		9. API NUMBER: 43047337830000
PHONE NUMBER: 720 929-6514		9. FIELD and POOL or WILDCAT: NATURAL BUTTES
COUNTY: UINTAH		STATE: UTAH
11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA		
TYPE OF SUBMISSION	TYPE OF ACTION	
<input type="checkbox"/> NOTICE OF INTENT Approximate date work will start:	<input type="checkbox"/> ACIDIZE	
<input checked="" type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: 2/8/2012	<input type="checkbox"/> ALTER CASING	
<input type="checkbox"/> SPUD REPORT Date of Spud:	<input type="checkbox"/> CASING REPAIR	
<input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	
	<input type="checkbox"/> CHANGE WELL STATUS	
	<input type="checkbox"/> CHANGE TUBING	
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	
	<input type="checkbox"/> CONVERT WELL TYPE	
	<input type="checkbox"/> DEEPEN	
	<input type="checkbox"/> FRACTURE TREAT	
	<input type="checkbox"/> NEW CONSTRUCTION	
	<input type="checkbox"/> OPERATOR CHANGE	
	<input type="checkbox"/> PLUG AND ABANDON	
	<input type="checkbox"/> PLUG BACK	
	<input checked="" type="checkbox"/> PRODUCTION START OR RESUME	
	<input type="checkbox"/> RECLAMATION OF WELL SITE	
	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION	
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	
	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	
	<input type="checkbox"/> TEMPORARY ABANDON	
	<input type="checkbox"/> TUBING REPAIR	
	<input type="checkbox"/> VENT OR FLARE	
	<input type="checkbox"/> WATER DISPOSAL	
	<input type="checkbox"/> WATER SHUTOFF	
	<input type="checkbox"/> SI TA STATUS EXTENSION	
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	
	<input type="checkbox"/> OTHER: <input style="width: 100px;" type="text"/>	
12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc. THE SUBJECT WELL WAS RETURNED TO PRODUCTION ON 02/08/2012.		
Accepted by the Utah Division of Oil, Gas and Mining FOR RECORD ONLY March 01, 2012		
NAME (PLEASE PRINT) Sheila Wopsock	PHONE NUMBER 435 781-7024	TITLE Regulatory Analyst
SIGNATURE N/A	DATE 2/24/2012	

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		FORM 9			
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		5. LEASE DESIGNATION AND SERIAL NUMBER: U-01791			
1. TYPE OF WELL Gas Well		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:			
2. NAME OF OPERATOR: KERR-MCGEE OIL & GAS ONSHORE, L.P.		7. UNIT or CA AGREEMENT NAME: NATURAL BUTTES			
3. ADDRESS OF OPERATOR: P.O. Box 173779 1099 18th Street, Suite 600, Denver, CO, 80217 3779		8. WELL NAME and NUMBER: NBU 392-6E			
4. LOCATION OF WELL FOOTAGES AT SURFACE: 1926 FSL 0611 FEL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: NESE Section: 06 Township: 10.0S Range: 21.0E Meridian: S		9. API NUMBER: 43047337830000			
11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA		9. FIELD and POOL or WILDCAT: NATURAL BUTTES			
TYPE OF SUBMISSION <input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 12/11/2012 <input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: <input type="checkbox"/> SPUD REPORT Date of Spud: <input type="checkbox"/> DRILLING REPORT Report Date:	TYPE OF ACTION <table style="width: 100%; border: none;"> <tr> <td style="width: 33%; vertical-align: top;"> <input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION </td> <td style="width: 33%; vertical-align: top;"> <input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input checked="" type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER </td> <td style="width: 33%; vertical-align: top;"> <input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input type="checkbox"/> APD EXTENSION OTHER: <input style="width: 100px;" type="text"/> </td> </tr> </table>		<input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input checked="" type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER	<input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input type="checkbox"/> APD EXTENSION OTHER: <input style="width: 100px;" type="text"/>
<input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input checked="" type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER	<input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input type="checkbox"/> APD EXTENSION OTHER: <input style="width: 100px;" type="text"/>			
12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc. The operator requests authorization to plug and abandon the subject well. Attached is the plug and abandonment procedure. Thank you.					
Accepted by the Utah Division of Oil, Gas and Mining Date: December 20, 2012 By: <u>Derek Quist</u>					
NAME (PLEASE PRINT) Jaime Scharnowske		PHONE NUMBER 720 929-6304			
SIGNATURE N/A		TITLE Regulatory Analyst			
DATE 12/11/2012					

NBU 392-6E
 1926' FSL & 611' FEL
 NESE SEC.6, T10S, R21E
 Uintah County, UT

KBE: 5029'
 GLE: 5015'
 TD: 6621'
 PBTD: 6596'

API NUMBER: 4304733783
 LEASE NUMBER: U-01791

CASING : 12 ¼" hole
 9.625" 36# J-55 @ 239'
 TOC @ Surface per circulation

7.875" hole
 4.5" 10.5# J-55 @ 6612'
 TOC @ ~2100 per CBL

PERFORATIONS: Wasatch 5747' – 6511'

TUBING: EOT @ 6540' (per EOG wellbore drawing)

Tubular/Borehole	Drift inches	Collapse psi	Burst Psi	Capacities		
				Gal./ft.	Cuft/ft.	Bbl./ft.
2.375" 4.7# J-55 tbg.	1.901	8100	7700	0.1626	0.02171	0.00387
4.5" 10.5# J-55 csg	3.833	5720		0.6699	0.0895	0.0159
9.625" 36# K-55 csg	8.921	2020	3520	3.247	0.434	0.0773
Annular Capacities						
2.375" tbg. X 4.5" 11.6# csg.				0.4226	0.0565	0.01
4.5" csg X 9 5/8" 36# csg				2.227	0.2977	0.053
4.5" csg. X 7.875" hole				1.7052	0.2278	0.0406
9.625" csg. X 12.25" hole				2.3436	0.3132	0.0558

GEOLOGIC INFORMATION:

Formation	Depth to top, ft.
Uinta	Surface
Green River	1360'
Bird's Nest	1715'
Mahogany	2090'
Base of Parachute	3057'
Wasatch	4750'

Tech. Pub. #92 Base of USDW's

USDW Elevation	~400' MSL
USDW Depth	~4629' KBE

NBU 392-6E PLUG & ABANDONMENT PROCEDURE

GENERAL

- H₂S MAY BE PRESENT. CHECK FOR H₂S AND TAKE APPROPRIATE PRECAUTIONS.
- CEMENT QUANTITIES BELOW ASSUME NEAT CLASS G, YIELD 1.145 CUFT./SX. IF A DIFFERENT PRODUCT IS USED, WELLSITE PERSONNEL ARE RESPONSIBLE FOR CORRECTING QUANTITIES TO YIELD THE STATED SLURRY VOLUME. WHEN SQUEEZING, INCLUDE 10% EXCESS PER 1000' OF DEPTH.
- TREATED FRESH WATER WILL BE PLACED BETWEEN ALL PLUGS INSTEAD OF BRINE.
- ALL DISPLACEMENT FLUID SHALL CONTAIN CORROSION INHIBITOR AND BIOCIDES. PREMIX 5 GALLONS PER 100 BBLS FLUID.
- NOTIFY BLM 24 HOURS BEFORE MOVING ON LOCATION.
- A GPS READING WILL NEED TO BE TAKEN AT THE WELL SITE AND RECORDED IN OPENWELLS. PLEASE TAKE IT TO THE 6TH DECIMAL PLACE.

PROCEDURE


Note: Approx. 437 sx Class "G" cement needed for procedure, (1) 4.5" CIBP + (2) 4.5" CICR.

Note: Gyro has not been run on this well.

1. A GPS READING WILL NEED TO BE TAKEN AT THE WELL SITE AND RECORDED IN OPENWELLS. PLEASE TAKE IT TO THE 6TH DECIMAL PLACE.
2. MIRU. KILL WELL AS NEEDED. ND WH, NU AND TEST BOPE.
3. PULL TBG. RU WIRELINE AND MAKE A GAUGE RING RUN TO CHECK FOR FILL. RUN GYRO SURVEY.
4. **PLUG #1, ISOLATE WAS PERFORATIONS (5747' - 6511'):** RIH W/ 4 ½" CIBP. SET @ ~5700'. RELEASE CIBP, PUH 10', BRK CIRC W/ FRESH WATER. RELEASE CIBP, PUH 10', BRK CIRC W/ FRESH WATER. DISPLACE A MINIMUM OF **8 SX / 1.6 BBL / 9.0 CUFT.** ON TOP OF PLUG. PUH ABOVE TOC (~5600'). REVERSE CIRCULATE W/ TREATED WATER.
5. **PLUG #2, PROTECT BASE OF USDW (~4629') & TOP OF WASATCH (4750'):** PUH TO ~4900'. BRK CIRC W/ FRESH WATER. DISPLACE **31 SX / 6.4 BBL / 35.8 CUFT.** AND BALANCE PLUG W/ TOC @ ~4500' (400' COVERAGE). PUH ABOVE TOC. REVERSE CIRCULATE W/ TREATED WATER.
6. **PLUG #3, PROTECT BASE OF PARACHUTE (~3057'):** PUH TO ~3200'. BRK CIRC W/ FRESH WATER. DISPLACE **23 SX / 4.8 BBL / 26.9 CUFT.** AND BALANCE PLUG W/ TOC @ ~2900' (300' COVERAGE). PUH ABOVE TOC. REVERSE CIRCULATE W/ TREATED WATER.
7. **PLUG #4, PROTECT TOP OF MAHOGANY (2090') & BIRD'S NEST (~1715'):** RIH W/ WIRELINE & PERFORATE @ ~2200' W/ 4 SPF. POOH. PU & RIH W/ 4 ½" CICR, SET @ ~1600'. RIH W/ TBG & STING INTO CICR & SQUEEZE PERFS W/ APPROXIMATELY **200 SX / 40.7 BBL / 228.5 CUFT.** OR SUFFICIENT VOLUME TO FILL CSG & ANNULUS TO ~1600'. (NOTE: CMT IS CALCULATED W/ 20% EXCESS). STING OUT OF CICR AND SPOT **4 SX / 0.8 BBL / 4.5 CUFT.** CMT ON TOP OF CICR. BRK CIRC W/ FRESH WATER. POOH ABOVE TOC (~1550'). REVERSE CIRCULATE W/ TREATED FRESH WATER.
8. **PLUG #5, PROTECT TOP OF GREEN RIVER (1360'):** RIH W/ WIRELINE & PERFORATE @ ~1500' W/ 4 SPF. POOH. PU & RIH W/ 4 ½" CICR, SET @ ~1200'. RIH W/ TBG & STING INTO CICR & SQUEEZE PERFS W/ APPROXIMATELY **92 SX / 18.7 BBL / 104.8 CUFT.** OR SUFFICIENT VOLUME TO FILL CSG & ANNULUS TO ~1200'. (NOTE: CMT IS CALCULATED W/ 10% EXCESS). STING OUT OF CICR AND SPOT **4 SX / 0.8 BBL / 4.5 CUFT.** CMT ON TOP OF CICR. BRK CIRC W/ FRESH WATER. POOH ABOVE TOC (~1150'). REVERSE CIRCULATE W/ TREATED FRESH WATER.
9. **PLUG #6, PROTECT SURFACE CASING SHOE (239' KB) & FILL SURFACE HOLE:** POOH. RIH W/ WIRELINE, PERFORATE @ 300' W/ 4 SPF. POOH W/ WIRELINE. RU CEMENT SERVICE TO PROD CSG. PUMP **98 SX / 19.9 BBL / 111.9 CUFT.** OR SUFFICIENT VOLUME TO FILL ANNULUS AND CASING TO SURFACE.

10. CUT OFF WELLHEAD AND INSTALL MARKER PER BLM GUIDELINES.
11. RDMO. TURN OVER TO OPERATIONS FOR SURFACE REHAB. SURFACE RECLAMATION TO BE PERFORMED IN ACCORDANCE TO REGULATIONS.

ALM 11/27/12
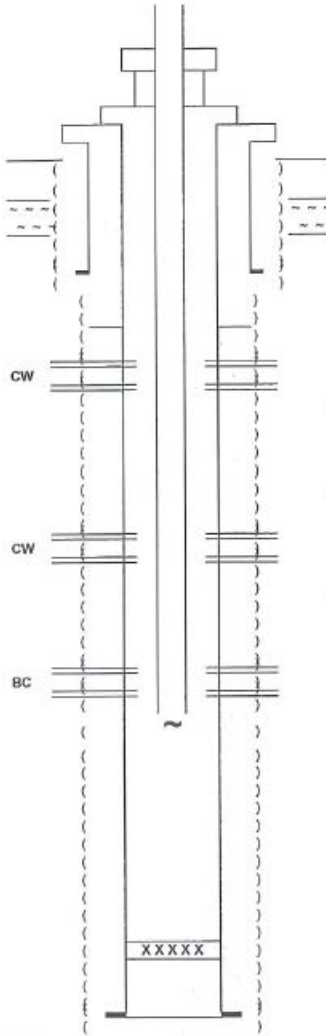
<u>WELLBORE DIAGRAM</u>			
	Operator:	EOG Resources, Inc.	
	Field Name:	Natural Buttes Unit	
	Well Name:	NBU 392-6E	
	Location:	1926' FSL & 611' FEL (NE SE) Sec. 6-T10S-R21E	
	County:	Utah	
	API #:	4304733783	
	Date:	6/13/01	
	GL:	5015'	
	KB:	5029'	
	Spud Date:	2/26/01	
	Completion Date:	3/22/01	
	Surface Casing:	9-5/8", 36#, J-55 @ 239' w/125 sx Class G cmt	
	Original Completion:		
	Formation:	Perforations:	Treatment:
	Chapita Wells	5883'-86", 5893'-96", 5906'-12' (3 SPF)	None
Chapita Wells	5970'-80", 6037'-39", 6086'-89" (3 SPF)	19,264 gals YF-130 fluid w/95,000# 20/40 sand down csg	
Buck Canyon	6480'-90", 6509'-11" (2 SPF)	15,135 gals YF-130 fluid w/63,500# 20/40 sand down csg	
DST's & Cores:			
Tubing:	2-3/8", 4.7#, J-55 @ 6540'		
Packer:			
PBTD:	6596'		
Production Casing:	4-1/2", 10.5#, J-55 @ 6612' w/400 sx Hi-Lift cmt followed by 500 sx 50-50 Pozmix cmt		
TD:	6621'		

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		FORM 9
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		5. LEASE DESIGNATION AND SERIAL NUMBER: U-01791
1. TYPE OF WELL Gas Well		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
2. NAME OF OPERATOR: KERR-MCGEE OIL & GAS ONSHORE, L.P.		7. UNIT or CA AGREEMENT NAME: NATURAL BUTTES
3. ADDRESS OF OPERATOR: P.O. Box 173779 1099 18th Street, Suite 600, Denver, CO, 80217 3779		8. WELL NAME and NUMBER: NBU 392-6E
4. LOCATION OF WELL FOOTAGES AT SURFACE: 1926 FSL 0611 FEL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: NESE Section: 06 Township: 10.0S Range: 21.0E Meridian: S		9. API NUMBER: 43047337830000
PHONE NUMBER: 720 929-6511		9. FIELD and POOL or WILDCAT: NATURAL BUTTES
COUNTY: UTAH		STATE: UTAH
11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA		
TYPE OF SUBMISSION	TYPE OF ACTION	
<input type="checkbox"/> NOTICE OF INTENT Approximate date work will start:	<input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION	
<input checked="" type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: 3/19/2013	<input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input checked="" type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER	
<input type="checkbox"/> SPUD REPORT Date of Spud:	<input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input type="checkbox"/> APD EXTENSION	
<input type="checkbox"/> DRILLING REPORT Report Date:	OTHER: <input style="width: 100px;" type="text"/>	
12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc. The operator has concluded the plug and abandonment operations on the subject well location on 03/19/2013. Please see the attached chronological well history for details and updated latitude and longitude location. Thank you.		
Accepted by the Utah Division of Oil, Gas and Mining FOR RECORD ONLY April 22, 2013		
NAME (PLEASE PRINT) Luke Urban	PHONE NUMBER 720 929-6501	TITLE Regulatory Specialist
SIGNATURE N/A	DATE 4/22/2013	

US ROCKIES REGION
Operation Summary Report

Well: NBU 392-6E				Spud Date:				
Project: UTAH-UINTAH			Site: NBU 392-6E				Rig Name No:	
Event: ABANDONMENT			Start Date: 3/13/2013				End Date: 3/19/2013	
Active Datum: RKB @0.00usft (above Mean Sea Level)			UWI: NBU 392-6E					
Date	Time Start-End	Duration (hr)	Phase	Code	Sub Code	P/U	MD From (usft)	Operation
3/13/2013	7:00 - 7:30	0.50	ABANDP	48		P		HSM , ROADING EQUIP
	7:30 - 10:00	2.50	ABANDP	30	A	P		MIRU F/ NBU 921-26G4CS, SICP & SITP 2,000 PSI.
	10:00 - 15:00	5.00	ABANDP	31	1	P		BLEW WELL DOWN HAD 97 PPM H2S, CONTROL TBG W/ H2S CHEMICAL, ND WH, BOLTS WERE RUSTED, NU BOPS RU FLOOR & TBG EQUIP, CONTROL CSG W/ H2S CHEMICAL, UNLAND TBG L/D HANGER. RU SCAN TECH,
	15:00 - 17:00	2.00	ABANDP	31	I	P		SCAN OUT & S.L.M W/ 116 JTS 23/8 J-55,SWI DRAIN UP EQUIP SDFN.
3/14/2013	7:00 - 7:30	0.50	ABANDP	48		P		HSM, WORKING AROUND H2S.
	7:30 - 8:30	1.00	ABANDP	31	I	P		SICP 150 PSI, CONTROL TBG W/ 10 BBLS FRESH WTR W/ SCAVENGER, SCAN & S.L.M REM 63 JTS 23/8 J-55 OUT OF HOLE. L/D SEAT NIPPLE & PLUG RETRIVING TOOL. HAD 168 YELLOW, 11 RED. RD SCAN TECH.
	8:30 - 13:00	4.50	ABANDP	34	I	P		RU CUTTERS, RIH W/ 41/2 GAUGE RING TO 5720', POOH RU GYRO TOOLS & RIH RAN GYRO F/ 100' TO 5700' POOH RD MS, RIH SET 41/2 CIBP @ 5700' POOH RD CUTTERS, FILL & TEST CSG TO 500 PSI NO TEST. ORDERED PKR TO FIND CSG LEAK.
	13:00 - 15:00	2.00	ABANDP	46	E	P		WAIT ON PLR TO ARIVE ON LOCATION.
	15:00 - 19:00	4.00	ABANDP	31	I	P		PU RIH W/ 32A PKR & 66 JTS 23/8 J-55, SET PKR @ 2077.36', TEST CSG TO 500 PSI HELD, RIH W/ 20 MORE JTS SET PKR @ 2700.49', TEST CSG TO 500 PSI. SET PKR @ 3324' CSG TEST SET PKR @ 3949' CSG TEST SET PKT @ 4573' CSG TEST SET PKR @ 5263' CSG TEST SET PKR @ 5700' NO TEST SET PKR @ 5674' NO TEST SET PKR @ 5485' CSG TEST SET PKR @ 5579' CSG TEST SET PKR @ 5643' CSG TEST ISOLATED LEAK FROM 5643 TO 5700 CIBP, UNSET PKR SWI DRAIN EQUIP SDFN.
3/15/2013	8:00 - 12:30	4.50		48		P		ATTEND APC SAFTY MEETING @ WESTERN PARK.

US ROCKIES REGION
Operation Summary Report

Well: NBU 392-6E

Spud Date:

Project: UTAH-UINTAH

Site: NBU 392-6E

Rig Name No:

Event: ABANDONMENT

Start Date: 3/13/2013

End Date: 3/19/2013

Active Datum: RKB @0.00usft (above Mean Sea Level)

UWI: NBU 392-6E

Date	Time Start-End	Duration (hr)	Phase	Code	Sub Code	P/U	MD From (usft)	Operation
	12:30 - 19:30	7.00	ABANDP	31	I	P		SICP VAC , POOH W/ 180 JTS 23/8 J-55 L/D PKR. RIH W/ N/C 182 JT EOT @ 5700' RU PRO PETRO, (BALANCED PLG #1) FILL HOLE PUMP 2.7 BBLS FRESH, 3.1 BBLS 15 SXS, GLAS G W/ 2% CALC, 1 BBL FRESH WTR, DISPL W/ 20.2 BBLS L/D 26 JTS EOT @ 4880' REV W/ 30 BBLS WTR. LET WELL SET FOR 1 HR. TEST CSG TO 500 PSI GOOD TEST. (BALANCED PLG #2) PUMPED 2ND BAL CMT PLUG, PUMPED 2.7 BBLS FRESH WTR, 6.3 BBLS CLASS G CMT, 31 SXS, 1 BBL FRESH, DISP W/ 16.2 BBLS WTR. L/D 54 JTS EOT @ 3195'.REV W/ 30 BBLS. (BALANCED PLG # 3) PUMPED 2.7 FRESH, 4.7 BBLS CLASS G CMT, 23 SXS, 1 FRESH, DISPL W/ 10.1 BBLS. L/D 51 JTS EOT @ 1600' REV W/ 15 BBLS, SWI SDFWE.
3/18/2013	7:00 - 7:30	0.50	ABANDP	48		P		HSM, WORKING IN THE WIND.
	7:30 - 10:00	2.50	ABANDP	34	H	P		SICP 0, POOH W/ 51 JTS 23/8 J-55, L/D NOTCHED COLLAR. RU CUTTERS RIH SHOT 4 HOLES @ 2200', POOH RIH W/ HAL CCR TO 1607' PLUG WOULDN'T SET. POOH DRAG BLOCK PROBLEMS, ORDERED WIRE LINE SET TOOLS.
	10:00 - 11:00	1.00	ABANDP	46	E	S		WAIT FOR WIRELINE SETTING TOOLS.
	11:00 - 11:30	0.50	ABANDP	34	B	P		RIH SET CICR @ 1616' RD WL.
	11:30 - 17:00	5.50	ABANDP	31	I	P		RIH W/ STINGER & 51 JTS 23/8 & PUP JTS STUNG INTO RET, GOT INJECTION RATE @ 2 BPM @380 PSI, PUMPED 10 BBLS FRESH, 41.7 BBLS 204 SXS CLASS G CMT, DISPL W/ 5.1 BBLS UNSTUG LEFT 4 SXS CMT ON PLUG. L/D PUPS & 13 JTS TBG, REV W/ 15 BBLS WTR. POOH W/ 38 JTS & STINGER. RU WL RIH & PERF 4 SHOTS @ 1500'.RD WL, BROKE CIRC DWN CSG & UP SURF W/ 30 BBLS WATER @ 4 BPM @ 255 PSI, RIH W/ STINGER & 38 JTS & PUPS STUNG INTO RETAINER, GOT INJECTION RATE OF 2 BPM @ 200 PSI, PUMPED 10 BBLS FRESH, 19.6 BBLS 96 SXS CLASS G CMT, 3.6 DISPL STUNG OUT DUMP 4 SXS CMT ON PLUG. L/D PUPS & 38 HTS 23/8 J-55, L/D STINGER, RU WL RIH PERF @ 300' POOH RD WL RD FLOOR NU BOPS RU WH PUMPED 150 SXS CLASS G CMT DWN 41/2 & UP 95/8 LOST CIRC RAN OUT OF CMT . SDFN
3/19/2013	7:00 - 7:30	0.50	ABANDP	48		P		HSM, RIGGING DOWN & MOVE, CUTTING WELL HEAD OFF WITH WELDER.
	7:30 - 11:00	3.50	ABANDP	30	C	P		RIG DOWN RIG, RU PRO PETRO PUMP DOWN 41/2 GOT CIRC UP SURFACE CSG AGAIN. PUMPED ANOTHER 195 SXS CLASS G W/ 2% CALC W/ SILICA FLAKES, GOT CMT TO SURFACE, CUT OFF WELL HEAD, TOP UP CSG W/ CMT WELD ON PLAT MOVED OFF LOCATION.
GPS LON : 39.97488 LAT: -109.58803								